

# Effect of variable shipping frequency on production-distribution policy in a vendor-buyer integrated system

Yuan-Shyi Peter Chiu<sup>(1)</sup>, Ching-Yun Chang<sup>(1)</sup>, Chia-Kuan Ting<sup>(1)</sup> and Singa Wang Chiu<sup>(2)</sup>

<sup>(1)</sup>Department of Industrial Engineering, Chaoyang University of Technology,  
Gifong East Road, Wufong, Taichung 413, TAIWAN

<sup>(2)</sup>Department of Business Administration, Chaoyang University of Technology, Gifong East Road,  
Wufong, Taichung 413, TAIWAN, e-mail: swang@cyut.edu.tw

## SUMMARY

*This paper investigates the effect of variable shipping frequency on production-distribution policy in a vendor-buyer integrated system. In a recent article Chiu et al. [1] derived the optimal replenishment lot size for an economic production quantity problem with multi-delivery and quality assurance, based on an assumption that the number of shipment is a given constant. However, in a vendor-buyer integrated system in supply chain environment, joint determination of replenishment lot size and number of shipments may help such a system to gain significant competitive advantage in terms of becoming a low-cost producer as well as having tight linkage to customer. For this reason, the present study extends the work of Chiu et al. [1] by considering shipping frequency as one of the decision variables and incorporating customer's stock holding cost into system cost analysis. Hessian matrix equations are employed to certify the convexity of cost function that contains two decision variables, and the effect of variable shipping frequency on production-distribution policy is investigated. A numerical example is provided to demonstrate practical usage of the research result.*

**Key words:** variable shipping policy, production-distribution system, supply chains, vendor-buyer system, lot size, rework.

## 1. INTRODUCTION

The finite production rate (FPR) model [2] employs a mathematical technique to describe an important trade-off between fixed production setup cost and inventory holding cost, and to derive the optimal batch size that minimizes the long-run average cost per unit time. The FPR model is also known as the economic production quantity (EPQ) model or the economic manufacturing quantity (EMQ) model [3-4]. It is often used in the manufacturing sector when products are produced in-house (with non-instantaneous inventory replenishment rate) instead of being acquired from outside suppliers (with unloading treated as instantaneous replenishment rate). The classical FPR model assumes that all items produced are of perfect quality. However, in real world production systems, due to process deterioration or other factors, generation of imperfect quality items

during a production run is inevitable. Studies [5-13] have been carried out to enhance the classic FPR model by addressing the issue of imperfect quality items produced.

The nonconforming items, sometimes, can be reworked and repaired; hence total production-inventory costs can be reduced [14-24]. Gopalan and Kannan [14] considered manufacturing, inspections, and rework activities as a two-stage transfer-line production system. They analyzed some of the transient state characteristics of such a two-stage production system subject to an initial buffer of infinite capacity, inspection at both the inter- and end-stages and rework. A stochastic model was developed to investigate the system. Explicit analytical expressions for some of the system characteristics have been obtained using the state-space method and regeneration point technique. Grosfeld-Nir and Gerchak [17] examined multistage production system where

defective units can be reworked repeatedly at every stage. The yield of each stage is uncertain, so several production runs may need to be attempted until the quantity of finished products is sufficient. The trade-off at each stage is between using small lots, possibly necessitating repeated rework set-ups and large lots, which may result in costly overproduction. They showed that a multistage system where only one of the stages requires a set-up (a “single-bottleneck system”) can be reduced to a single-stage system. They also proved that it is best to make the “bottleneck” the first stage of the system and they also developed recursive algorithms for solving two- and three-stage systems, where all stages require set-ups, optimally.

Another unrealistic assumption of the classic FPR model is “continuous” inventory issuing policy for satisfying product demand. In real life vendor-buyer integrated production-inventory system, at customer’s request, multiple or periodic deliveries of finished products are commonly used [25-37]. Goyal [25] first studied the integrated inventory model for a single supplier-single customer problem. He proposed a method that is typically applicable to those inventory problems where a product is procured by a single customer from a single supplier. He gave example to illustrate his proposed method. Hill [26] studied a model in which a manufacturing firm purchases a raw material, manufactures a product (at a finite rate) and ships a fixed quantity of the product to a single customer at fixed and regular intervals of time, as specified by the customers. The objective is to determine a purchasing and production schedule which minimizes total cost of purchasing, manufacturing and stockholding. Diponegoro and Sarker [30] determined an ordering policy for raw materials as well as an economic batch size for finished products that are delivered to customers frequently at a fixed interval of time for a finite planning horizon. The problem was then extended to compensate for the lost sales of finished products. A closed-form solution to the problem was obtained for the minimal total cost. A lower bound on the optimal solution was also developed for problem with lost sale. It was shown that the solution and the lower bound were consistently tight. Chiu et al. [1] derived the optimal replenishment lot size for an economic production quantity problem with multi-delivery and quality assurance, based on an assumption that the number of shipment is a given constant.

However, in a vendor-buyer integrated system in supply chain environment, joint determination of replenishment lot size and number of shipments may help such a system to gain significant competitive advantage in terms of becoming a low-cost producer as well as having tight linkage to customer. For this reason, the present study extends the work of Chiu et al. [1] by considering shipping frequency as one of the decision variables and incorporating customer’s

stock holding cost into system cost analysis, and investigates effect of variable shipping frequency on production-distribution policy in supply chain environment.

## 2. PROBLEM DESCRIPTION AND MATHEMATICAL MODELING

Consider a production-distribution system where the manufacturing process may randomly produce a portion  $x$  of defective items at a production rate  $d$ . All items produced are screened, and inspection cost per item is included in the unit production cost  $C$ . Among these defective items, a  $\theta$  portion is assumed to be scrap and the other portion can be reworked and repaired at a rate  $P_1$ , in each cycle when regular production ends. In order to avoid shortage from occurring, the constant production rate  $P$  has to be larger than the sum of demand rate  $\lambda$  and production rate of defective items  $d$ . That is:  $(P-d-\lambda) > 0$  or  $(1-x-\lambda/P) > 0$ ; where  $d = Px$ . It is assumed that the finished items can only be delivered to customers if the whole lot is quality assured at the end of rework. Fixed quantity  $n$  installments of the finished batch are delivered to the customer at a fixed interval of time during production downtime  $t_3$  (see Figure 1).

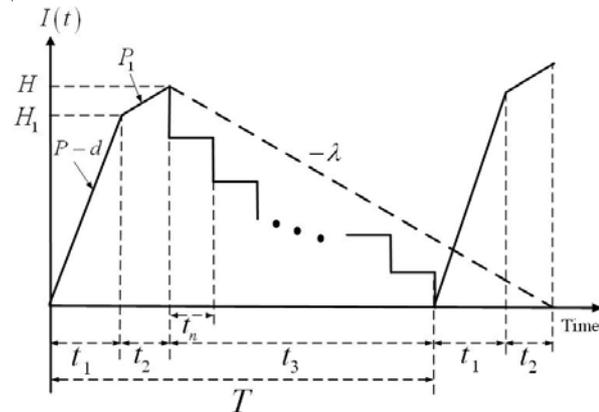


Fig. 1 On-hand inventory of perfect quality items in an integrated finite production rate model with multi-shipment policy, scrap and rework

The cost parameters considered in proposed model include: fixed delivery cost  $K_1$  per shipment, unit delivery cost  $C_T$  per item shipped, setup cost  $K$ , unit holding cost  $h$ , unit production cost  $C$ , disposal cost per scrap item  $C_S$ , unit rework cost  $C_R$ , holding cost  $h_1$  for each reworked item, holding cost  $h_2$  for each item kept by customer. Additional notation used in this paper is listed in Appendix A. From Figure 1, the following parameters and derivations can be obtained directly:

$$t_1 = \frac{Q}{P} \tag{1}$$

$$H_1 = (P-d)t_1 = (P-d)\frac{Q}{P} = (1-x)Q \tag{2}$$

$$H = H_1 + P_1 t_2 = Q(1 - \theta x) \quad (3)$$

$$T = t_1 + t_2 + t_3 \quad (4)$$

The maximum level of defective items  $dt_1$ , the time needed for rework  $t_2$  and the time needed for delivery  $t_3$  are:

$$dt_1 = P x t_1 = x Q. \quad (5)$$

$$t_2 = \frac{x Q (1 - \theta)}{P_1} \quad (6)$$

$$t_3 = n t_n = T - (t_1 + t_2) = Q \left( \frac{(1 - \theta x)}{\lambda} - \frac{1}{P} - \frac{x(1 - \theta)}{P_1} \right) \quad (7)$$

A  $\theta$  portion among nonconforming items is assumed to be scrap and can be obtain as:

$$\theta dt_1 = \theta P x t_1 = \theta x Q \quad (8)$$

The other repairable portion  $(1 - \theta)$  is reworked right after the production uptime  $t_1$  ends.

The delivery cost per shipment is:

$$K_I + C_T \left( \frac{H}{n} \right) \quad (9)$$

Total distribution costs for  $n$  shipments in a cycle are:

$$n \left[ K_I + C_T \left( \frac{H}{n} \right) \right] = n K_I + C_T H = n K_I + C_T Q (1 - \theta x) \quad (10)$$

Total production-inventory-delivery cost per cycle  $TC(Q, n)$  consists of variable production cost, setup cost, variable rework cost, disposal cost, fixed and variable delivery cost, holding cost during uptime  $t_1$  and rework time  $t_2$ , holding cost for items reworked, and holding cost for finished goods kept by both manufacturer and customer during  $t_3$ , when  $n$  fixed-quantity installments of the finished batch are delivered to customer at a fixed interval of time. Therefore,  $TC(Q, n)$  is (see Appendix B for the computation of customer's holding cost and see Appendix in Ref. [1] for the computation of manufacturer's holding cost; i.e. the last two terms of Eq. (11)):

$$TC(Q, n) = CQ + K + C_R [x(1 - \theta)Q] + C_S [x\theta Q] + nK_I + C_T [Q(1 - \theta x)] + h_1 \cdot \frac{P_1 \cdot t_2}{2} \cdot (t_2) + h \left[ \frac{H_1 + dt_1}{2} (t_1) + \frac{H_1 + H}{2} (t_2) \right] + h \left( \frac{n - 1}{2n} \right) H t_3 + \frac{h_2}{2} \left[ \frac{H}{n} t_3 + T(H - \lambda t_3) \right] \quad (11)$$

It is noted [1] that Eq. (11) now contains two decision variables and incorporates customer's stock holding cost, and the objective here is to jointly derive the optimal production lot size  $Q^*$  and the optimal number of delivery  $n^*$ .

The proportion  $x$  of defective items is assumed to be a random variable with a known probability density function. In order to take the randomness of defective rate into account, the expected values of  $x$  can be used in the inventory cost analysis. Substituting all related parameters from Eqs. (1) to (10) in  $TC(Q, n)$ , the expected production-inventory-delivery cost per unit time  $E[TCU(Q, n)]$  can be obtained:

$$E[TCU(Q, n)] = \frac{E[TC(Q, n)]}{E[T]} = \frac{C\lambda}{1 - \theta E[x]} + \frac{(K + nK_I)\lambda}{Q(1 - \theta E[x])} + \frac{C_R E[x](1 - \theta)\lambda}{(1 - \theta E[x])} + \frac{C_S E[x]\theta\lambda}{(1 - \theta E[x])} + \frac{hQ\lambda}{2P(1 - \theta E[x])} + \frac{Q\lambda E[x]}{2P_1(1 - \theta E[x])} \left\{ h \left[ (2 - E[x] - \theta E[x])(1 - \theta) \right] + h_1 E[x](1 - \theta)^2 \right\} + C_T \lambda + \left( 1 - \frac{1}{n} \right) \frac{Q(h_2 - h)}{2} \left\{ \frac{\lambda}{P} + \frac{E[x]\lambda(1 - \theta)}{P_1} \right\} + \frac{Q(1 - \theta E[x])}{2} \left( h + \frac{h_2 - h}{n} \right) \quad (12)$$

### 3. JOINTLY DETERMINING PRODUCTION-DISTRIBUTION POLICY

For the proof of convexity of  $E[TCU(Q, n)]$ , one can use Hessian matrix equations [38] and obtain the following (see Appendix C for detailed computation):

$$[Q \quad n] \cdot \begin{pmatrix} \frac{\partial^2 E[TCU(Q, n)]}{\partial Q^2} & \frac{\partial^2 E[TCU(Q, n)]}{\partial Q \partial n} \\ \frac{\partial^2 E[TCU(Q, n)]}{\partial Q \partial n} & \frac{\partial^2 E[TCU(Q, n)]}{\partial n^2} \end{pmatrix} \cdot \begin{bmatrix} Q \\ n \end{bmatrix} = \frac{2K\lambda}{Q(1 - \theta E[x])} > 0 \quad (13)$$

Equation (13) is resulting positive, because  $K, \lambda, Q,$  and  $(1-\theta E[x])$  are all positive. Hence, the expected integrated costs  $E[TCU(Q,n)]$  is a strictly convex function for all  $Q$  and  $n$  different from zero. It follows that for the optimal production lot size  $Q^*$  and the optimal number of delivery  $n^*$ , one can differentiate  $E[TCU(Q,n)]$  with respect to  $Q$  and with respect to  $n$ , and solve the linear system of Eqs. (14) and (15), by setting these partial derivatives equal to zero:

$$\frac{\partial E[TCU(Q,n)]}{\partial Q} = -\frac{\lambda(K+nK_I)}{Q^2(1-\theta E[x])} + \frac{h\lambda}{2P(1-\theta E[x])} + \left(I - \frac{I}{n}\right) \frac{(h_2-h)\lambda}{2} \left[\frac{1}{P} + \frac{E[x](1-\theta)}{P_I}\right] + \frac{\lambda E[x](1-\theta)}{2P_I(1-\theta E[x])} \left\{h[2-E[x]-\theta E[x]] + h_1 E[x](1-\theta)\right\} + \frac{(1-\theta E[x])}{2} \left[h + \frac{(h_2-h)}{n}\right] \quad (14)$$

$$\frac{\partial E[TCU(Q,n)]}{\partial n} = \frac{K_I \lambda}{Q(1-\theta E[x])} - \frac{(h_2-h)}{n^2} \left[\frac{Q(1-\theta E[x])}{2} - \frac{Q\lambda}{2P} - \frac{QE[x](1-\theta)\lambda}{2P_I}\right] \quad (15)$$

By setting Eq. (14) equal to zero, one has:

$$\frac{(K+nK_I)\lambda}{Q^2(1-\theta E[x])} = \frac{\lambda}{2(1-\theta E[x])} \left\{h\left[\frac{1}{P} + \frac{E[x]}{P_I}\right][2-E[x]-\theta E[x]](1-\theta) + \frac{h_1(E[x])^2(1-\theta)^2}{P_I}\right\} + \left(\frac{n-1}{2n}\right) \left[h(1-\theta E[x]) + (h_2-h)\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)\right] + \frac{h_2}{2n}(1-\theta E[x]) \quad (16)$$

After rearrangement, one obtains the following optimal production lot size  $Q^*$ :

$$Q^* = \sqrt{\frac{2(K+nK_I)\lambda}{\left\{\frac{h\lambda}{P} + \frac{\lambda E[x](1-\theta)}{P_I}\left[h(2-E[x]-\theta E[x]) + h_1 E[x](1-\theta)\right] + \left[h + \frac{(h_2-h)}{n}\right](1-\theta E[x])^2\right\} + \left(\frac{n-1}{n}\right)(h_2-h)\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)(1-\theta E[x])}} \quad (17)$$

By setting Eq. (15) equal to zero, one has:

$$n^2 = \frac{Q^2(h_2-h)\left[(1-\theta E[x])^2 - (1-\theta E[x])\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)\right]}{2K_I\lambda} \quad (18)$$

Substituting Eq. (17) in Eq. (18), one obtains:

$$n^2 = \frac{K(h_2-h)\left[(1-\theta E[x])^2 - (1-\theta E[x])\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)\right]}{K_I \left\{\frac{h\lambda}{P} + \frac{h\lambda}{P_I}\left[2E[x] - (E[x])^2 - \theta(E[x])^2\right](1-\theta) + h(1-\theta E[x])^2 + \left[h + \frac{(h_2-h)}{n}\right](1-\theta E[x])^2\right\} + (h_2-h)\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)(1-\theta E[x]) + \frac{h_1(E[x])^2\lambda(1-\theta)^2}{P_I}} \quad (19)$$

After rearrangement one obtains the optimal number of delivery  $n^*$  as:

$$n^* = \sqrt{\frac{K(h_2-h)\left[(1-\theta E[x]) - \left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)\right]}{K_I \left\{\frac{h\lambda E[x]}{(1-\theta E[x])}\left[\frac{\theta}{P} + \frac{(1-E[x])(1-\theta)}{P_I}\right] + h(1-\theta E[x]) + \frac{h_1(E[x])^2\lambda(1-\theta)^2}{P_I(1-\theta E[x])} + h_2\left(\frac{\lambda}{P} + \frac{E[x](1-\theta)\lambda}{P_I}\right)\right\}}} \quad (20)$$

### 3.1 The special case with $x=0$

Analysis of the similar model without considering random defective rate: If all items produced are of perfect quality, then the proposed model becomes the same as classic finite production rate model with multi-delivery policy. When  $x=0$ , the total cost per cycle is:

$$TC_I(Q,n) = CQ + K + C_T Q + nK_I + h \frac{H}{2} (t_1) + h \left( \frac{n-1}{2n} \right) H t_2 + \frac{h_2}{2} \left[ \frac{H}{n} t_2 + T(H - \lambda t_2) \right] \quad (21)$$

The expected production-inventory-delivery cost per unit time for this special model can be derived as follows:

$$E[TCU_I(Q,n)] = C\lambda + \frac{(K + nK_I)\lambda}{Q} + C_T\lambda + \frac{hQ\lambda}{2P} + \left( \frac{n-1}{n} \right) \left( \frac{hQ}{2} - \frac{hQ\lambda}{2P} \right) + \left( \frac{1}{n} \right) \frac{h_2 Q}{2} + \left( 1 - \frac{1}{n} \right) \frac{h_2 Q\lambda}{2P} \quad (22)$$

Convexity of  $E[TCU_I(Q,n)]$  can also be proved and the optimal solutions to this special model can be obtained as follows:

$$Q^* = \sqrt{\frac{2(K + nK_I)\lambda}{\left\{ \frac{h\lambda}{P} + \left( \frac{n-1}{n} \right) \left[ h + (h_2 - h) \left( \frac{\lambda}{P} \right) \right] + \left( \frac{1}{n} \right) h_2 \right\}}} \quad (23)$$

$$n^* = \sqrt{\frac{K(h_2 - h) \left[ 1 - (\lambda/P) \right]}{K_I \left[ h + h_2 (\lambda/P) \right]}} \quad (24)$$

## 4. NUMERICAL EXAMPLE WITH FURTHER DISCUSSION

Suppose that a product has a flat demand rate of 3,400 units per year. This item can be produced at a rate of 60,000 units per year. During the manufacturing process, a random nonconforming rate  $x$  is assumed, which follows a uniform distribution over the interval  $[0, 0.3]$ . Among the defective items, a portion  $\theta=0.1$  is considered to be scrap and the other portion can be reworked and repaired, at a rate  $P_I=2,100$  units per year. Additional values of parameters include:

- $h = \$20$  per item per year,
- $h_1 = \$40$  per item reworked per unit time (year),
- $h_2 = \$80$  per item kept at the customer's end per unit time,
- $K = \$20,000$  per production run,
- $C = \$100$  per item,
- $C_T = \$0.1$  per item delivered,
- $K_I = \$4,350$  per shipment, a fixed cost,
- $C_R = \$60$  repaired cost for each item reworked,
- $C_S = \$20$  disposal cost for each scrap item.

From Eqs. (20), (17) and (12), one obtains: the optimal number of delivery  $n^*=2$ , the optimal production lot size  $Q^*=1,707$ , and the long-run average cost  $E[TCU(Q^*,n^*)] = \$490,585$ . The effects of variation of production lot size on the expected costs  $E[TCU(Q,n^*=2)]$  and on the components of  $E[TCU(Q,n^*=2)]$  are illustrated in Figure 2.

The effect of variation of shipping frequency  $n$  on the  $E[TCU(Q^*,n^*)]$  and on various components of  $E[TCU(Q^*,n^*)]$  are analyzed and depicted in Figure 3. It may be seen that as shipping frequency  $n$  increases, total delivery cost goes up significantly.

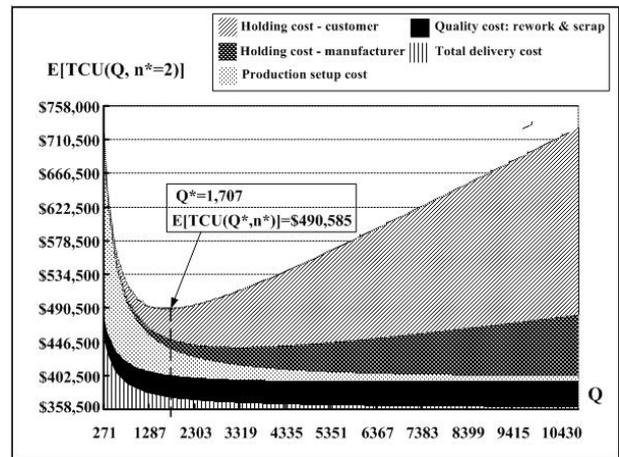


Fig. 2 Variation of lot size effects on the cost function  $E[TCU(Q,n^*=2)]$  and on the various components of  $E[TCU(Q,n^*=2)]$

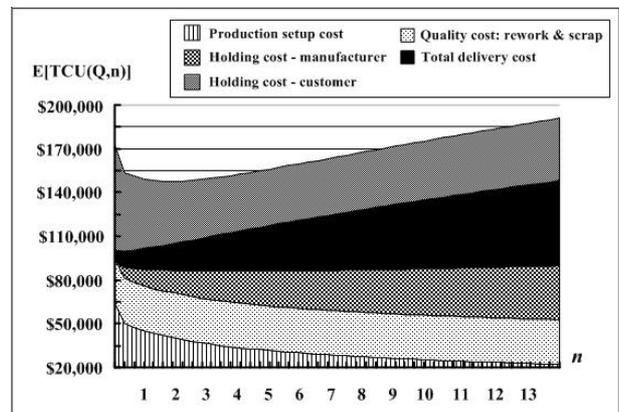


Fig. 3 Variation of shipping frequency  $n$  on the  $E[TCU(Q^*,n^*)]$  and on the various components of  $E[TCU(Q^*,n^*)]$

Similarly, for the special case (i.e. situation when all items produced are of perfect quality), the optimal number of delivery  $n^*=3$  (is rounded off from 3,257), the optimal lot size  $Q^*=2,276$ , and the long-run average cost  $E[TCUI(Q^*,n^*)]=\$439,101$  can also be obtained by using Eqs. (24), (23) and (22).

**5. CONCLUSIONS**

The present paper extends the work of Chiu et al. [1] by considering shipping frequency as one of the decision variables and incorporating customer's stock holding cost into system cost analysis. Hessian matrix equations are employed to certify the convexity of cost function that contains two decision variables, and the effect of variable shipping frequency on production-distribution policy is investigated. As a result, the closed-form solutions in terms of the optimal replenishment lot size and the optimal number of shipments are derived. It may be noted that without an in-depth investigation and robust analysis of such a production-distribution system, the optimal inventory replenishment and delivery policy cannot be obtained. Neither can the insight regarding the effects of variable shipping frequency and other system parameters be clearly gained (Figures 2 and 3). For future research, one can study effect of backlogging on the operating policy of the system.

**6. ACKNOWLEDGEMENTS**

The authors greatly appreciate the support of the National Science Council (NSC) of Taiwan under grant number: NSC 99-2221-E-324-017.

**APPENDIX A**

Notation:

- $H_1$  – maximum level of on-hand inventory in units when regular production process ends,
- $H$  – the maximum level of on-hand inventory in units when rework process finishes,
- $t_1$  – the production uptime for the proposed finite production rate model,
- $t_2$  – time required for reworking of defective items,
- $t_3$  – time required for delivering all quality assured finished products,
- $T$  – cycle length,
- $Q$  – production lot size, to be determined for each cycle,
- $D$  – number of finished items (fixed quantity) to be distributed to customer per delivery,
- $n$  – number of fixed quantity installments of the finished batch to be delivered to customer, to be determined for each cycle,

- $t_n$  – a fixed interval of time (between each installment of finished products to be delivered to customer during production downtime  $t_3$ ),
- $I(t)$  – on-hand inventory of perfect quality items at time  $t$ ,
- $I_d(t)$  – on-hand inventory of defective items at time  $t$ ,
- $I_c(t)$  – on-hand inventory at the customer's end at time  $t$ ,
- $TC(Q,n)$  – total production-inventory-delivery costs per cycle for the proposed model,
- $TC_1(Q,n)$  – total production-inventory-delivery per cycle when no defective items produced (i.e. special case: the classic finite production rate model with multi-delivery policy),
- $E[TCU(Q,n)]$  – the long-run average costs per unit time for the proposed model,
- $E[TCU_1(Q,n)]$  – the long-run average costs per unit time for model in the special case.

**APPENDIX B**

Computations of the customer's holding cost during  $t_3$  are as follows.

Because  $n$  installments (fixed quantity  $D$ ) of the finished lot are delivered to customer at a fixed interval of time  $t_n$ , one has the following:

$$D = \frac{H}{n} \tag{B-1}$$

$$t_n = \frac{t_3}{n} \tag{B-2}$$

At the customer's end, the demand between shipments is  $(\lambda t_n)$ , and let  $I$  denote number of items that will be left over after satisfying the demand during each fixed interval of time  $t_n$  (see Figure 4), then:

$$I = D - \lambda t_n \tag{B-3}$$

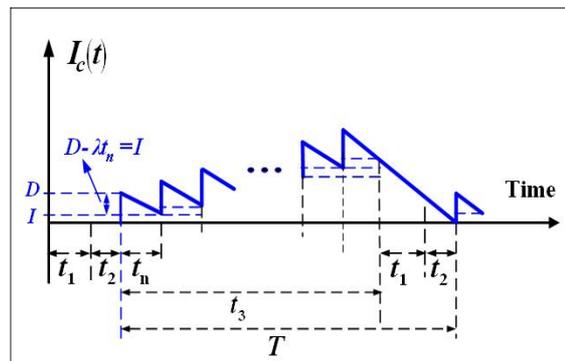


Fig. 4 On-hand inventory at the customer's end when  $n$  installments of the finished batch are delivered

From Figure 4 one can calculate the average inventory as follows:

$$\begin{aligned} \text{Average inventory} = & \left[ \left( \frac{D+I}{2} \right) t_n \right] + \left[ \frac{(D+I) + [(D+I) - \lambda t_n]}{2} t_n \right] + \left[ \frac{(D+2I) + [(D+2I) - \lambda t_n]}{2} t_n \right] + \\ & + \dots + \left[ \frac{D + (n-1)I + [(D + (n-1)I) - \lambda t_n]}{2} t_n \right] + \left( \frac{nI}{2} \right) (t_1 + t_2) \end{aligned} \quad (B-4)$$

Substituting Eq. (B-3) in Eq. (B-4), the average inventory becomes:

$$\begin{aligned} \text{Average inventory} = & \left( D - \frac{\lambda}{2} t_n \right) t_n + \left( D + I - \frac{\lambda}{2} t_n \right) t_n + \left( D + 2I - \frac{\lambda}{2} t_n \right) t_n + \dots + \left( D + (n-1)I - \frac{\lambda}{2} t_n \right) t_n + \\ & + \left( \frac{nI}{2} \right) (t_1 + t_2) = \\ = & n \left( D - \frac{\lambda}{2} t_n \right) t_n + \frac{n(n-1)}{2} I t_n + \frac{nI}{2} (t_1 + t_2) \end{aligned} \quad (B-5)$$

Substituting Eq. (B-1) through (B-3) in Eq. (B-5), the following general term for average inventory at the customer's end can be obtained:

$$\begin{aligned} \text{Average inventory} = & n \left( \frac{H}{n} - \frac{\lambda}{2} t_n \right) t_n + \frac{n(n-1)}{2} \left( \frac{H}{n} - \lambda t_n \right) t_n + \frac{n}{2} \left( \frac{H}{n} - \lambda t_n \right) (t_1 + t_2) = \\ = & H t_n - \frac{n\lambda}{2} t_n^2 + H t_n \frac{(n-1)}{2} - \frac{n(n-1)}{2} \lambda t_n^2 + \frac{H}{2} (t_1 + t_2) - \frac{n}{2} (\lambda t_n) (t_1 + t_2) = \\ = & \frac{H t_3}{n} - \frac{\lambda t_3^2}{2n} + \frac{(n-1) H t_3}{2n} - \frac{(n-1) \lambda t_3^2}{2n} + \frac{H}{2} (t_1 + t_2) - \frac{\lambda t_3}{2} (t_1 + t_2) = \\ = & \frac{I}{2} \left[ \frac{H t_3}{n} + T (H - \lambda t_3) \right] \end{aligned} \quad (B-6)$$

Hence, the holding cost for items kept at the customer's end is (i.e. the last term in Eq. (11)):

$$\frac{h_2}{2} \left[ \frac{H t_3}{n} + T (H - \lambda t_3) \right] \quad (B-7)$$

### APPENDIX C

Computational procedures for Eq. (13) are as follows:

From Eq. (12), the following partial derivative can be obtained:

$$\begin{aligned} \frac{\partial E[TCU(Q,n)]}{\partial Q} = & -\frac{\lambda(K+nK_1)}{Q^2(1-\theta E[x])} + \frac{h\lambda}{2P(1-\theta E[x])} + \left( I - \frac{1}{n} \right) \frac{(h_2-h)\lambda}{2} \left[ \frac{1}{P} + \frac{E[x](1-\theta)}{P_1} \right] + \\ & + \frac{\lambda E[x](1-\theta)}{2P_1(1-\theta E[x])} \left\{ h[2-E[x]-\theta E[x]] + h_1 E[x](1-\theta) \right\} + \frac{(1-\theta E[x])}{2} \left[ h + \frac{(h_2-h)}{n} \right] \end{aligned} \quad (C-1)$$

$$\frac{\partial^2 E[TCU(Q,n)]}{\partial Q^2} = \frac{2(K+nK_1)\lambda}{Q^3(1-\theta E[x])} \quad (C-2)$$

$$\frac{\partial E[TCU(Q,n)]}{\partial n} = \frac{K_1\lambda}{Q(1-\theta E[x])} - \frac{(h_2-h)}{n^2} \left[ \frac{Q(1-\theta E[x])}{2} - \frac{Q\lambda}{2P} - \frac{QE[x](1-\theta)\lambda}{2P_1} \right] \quad (C-3)$$

$$\frac{\partial^2 E[TCU(Q,n)]}{\partial n^2} = \frac{1}{n^3} (h_2-h) \left[ Q(1-\theta E[x]) - \frac{Q\lambda}{P} - \frac{QE[x]\lambda(1-\theta)}{P_1} \right] \quad (C-4)$$

$$\frac{\partial E[TCU(Q,n)]}{\partial Q \partial n} = -\frac{K_1 \lambda}{Q^2 (1-\theta E[x])} - \frac{1}{n^2} (h_2 - h) \left[ \frac{(1-\theta E[x])}{2} - \frac{\lambda}{2P} - \frac{E[x](1-\theta)\lambda}{2P_1} \right] \quad (C-5)$$

Substituting Eqs. (C-1) through (C-5) in Hessian matrix, Eq. (13), one obtains:

$$\begin{aligned} [Q \quad n] \cdot \begin{pmatrix} \frac{\partial^2 E[TCU(Q,n)]}{\partial Q^2} & \frac{\partial^2 E[TCU(Q,n)]}{\partial Q \partial n} \\ \frac{\partial^2 E[TCU(Q,n)]}{\partial Q \partial n} & \frac{\partial^2 E[TCU(Q,n)]}{\partial n^2} \end{pmatrix} \cdot \begin{bmatrix} Q \\ n \end{bmatrix} = \\ = \begin{bmatrix} \frac{2(K+nK_1)\lambda}{Q(1-\theta E[x])} + \frac{(h_2-h)}{n} \left[ Q(1-\theta E[x]) - \frac{Q\lambda}{P} - \frac{QE[x]\lambda(1-\theta)}{P_1} \right] \\ -\frac{2nK_1\lambda}{Q(1-\theta E[x])} - \frac{(h_2-h)}{n} \left[ Q(1-\theta E[x]) - \frac{Q\lambda}{P} - \frac{QE[x]\lambda(1-\theta)}{P_1} \right] \end{bmatrix} = \frac{2K\lambda}{Q(1-\theta E[x])} > 0 \quad (13) \end{aligned}$$

## 7. REFERENCES

- [1] Y.-Sh.P. Chiu, S.W. Chiu, C.-Y. Li and C.-K. Ting, Incorporating multi-delivery policy and quality assurance into economic production lot size problem, *Journal of Scientific & Industrial Research*, Vol. 68, pp. 505-512, 2009.
- [2] S. Nahmias, *Production & Operations Analysis*, 5th edition, McGraw-Hill, New York, pp. 195-223, 2005.
- [3] R.J. Tersine, *Principles of Inventory and Materials Management*, PTR Prentice-Hall, New Jersey, pp. 121-129, 1994.
- [4] E.A. Silver, D.F. Pyke and R. Peterson, *Inventory Management and Production Planning and Scheduling*, John Wiley & Sons, New York, pp. 151-172, 1998.
- [5] R.E. Barlow and F. Proschan, *Mathematical Theory of Reliability*, John Wiley, New York, 1965.
- [6] M. Berg, M.J.M. Posner and H. Zhao, Production-inventory systems with unreliable machines, *Operations Research*, Vol. 42, pp. 111-118, 1974.
- [7] S. Aggarwal, A review of current inventory theory and its application, *International Journal of Production Research*, Vol. 12, pp. 443-482, 1974.
- [8] M.J. Rosenblatt and H.L. Lee, Economic production cycles with imperfect production processes, *IIE Transactions*, Vol. 18, pp. 48-55, 1986.
- [9] T. Bielecki and P.R. Kumar, Optimality of zero-inventory policies for unreliable production facility, *Operations Research*, Vol. 36, pp. 532-541, 1988.
- [10] T. Boone, R. Ganeshan, Y. Guo and J.K. Ord, The impact of imperfect processes on production run times, *Decision Sciences*, Vol. 31, pp. 773-785, 2000.
- [11] Y.-Sh.P. Chiu, Y.-L. Lien and C.-A.K. Lin, Incorporating machine reliability issue and backlogging into the EMQ model – Part I: random breakdown occurring in backorder filling time, *International Journal for Engineering Modelling*, Vol. 22, No. 1-4, pp. 1-13, 2009.
- [12] S.W. Chiu, Y.-Sh.P. Chiu, H.-J. Chuang and C.-H. Lee, Incorporating machine reliability issue and backlogging into the EMQ model – Part II: random breakdown occurring in inventory piling time, *International Journal for Engineering Modelling*, Vol. 22, No. 1-4, pp. 15-24, 2009.
- [13] Y.-Sh.P. Chiu, K.-K. Chen and H.-H. Chang, Solving an economic production lot size problem with multi-delivery policy and quality assurance using an algebraic approach, *Journal of Scientific & Industrial Research*, Vol. 69, pp. 926-929, 2010.
- [14] M.N. Gopalan and S. Kannan, Expected duration analysis of a two-stage transfer-line production system subject to inspection and rework, *Journal of the Operational Research Society*, Vol. 45, pp. 797-805, 1994.
- [15] J.J. Liu and P. Yang, Optimal lot-sizing in an imperfect production system with homogeneous reworkable jobs, *European Journal of Operational Research*, Vol. 91, pp. 517-527, 1996.
- [16] T. Dohi, N. Kaio and S. Osaki, Minimal repair policies for an economic manufacturing process, *Journal of Quality in Maintenance Engineering*, Vol. 4, pp. 248-262, 1998.

- [17] A. Grosfeld-Nir and Y. Gerchak, Multistage production to order with rework capability, *Management Science*, Vol. 48, pp. 652-664, 2002.
- [18] A.M.M. Jamal, B.R. Sarker and S. Mondal, Optimal manufacturing batch size with rework process at a single-stage production system, *Computers and Industrial Engineering*, Vol. 47, pp. 77-89, 2004.
- [19] S.W. Chiu, Y.-Sh.P. Chiu and C.-C. Shih, Determining expedited time and cost of the end product with defective component parts using critical path method (CPM) and time-costing method, *Journal of Scientific & Industrial Research*, Vol. 65, pp. 695-701, 2006.
- [20] Y.-Sh.P. Chiu, K.-K. Chen, F.-T. Cheng and M.-F. Wu, Optimization of the finite production rate model with scrap, rework and stochastic machine breakdown, *Computers and Mathematics with Applications*, Vol. 59, pp. 919-932, 2010.
- [21] T-P. Hsieh, C.-Y. Dye and L.-Y. Ouyang, Optimal lot size for an item with partial backlogging rate when demand is stimulated by inventory above a certain stock level, *Mathematical and Computer Modelling*, Vol. 51, pp. 13-32, 2010.
- [22] Y.-Sh.P. Chiu and Ch.-K. Ting, A note on 'Determining the optimal run time for EPQ model with scrap, rework, and stochastic breakdowns', *European Journal of Operational Research*, Vol. 201, pp. 641-643, 2010.
- [23] M.I.M. Wahab and M.Y. Jaber, Economic order quantity model for items with imperfect quality, different holding costs, and learning effects: A note, *Computers & Industrial Engineering*, Vol. 58, pp. 186-190, 2010.
- [24] Y.-Sh.P. Chiu, F.-T. Cheng and H.-H. Chang, Remarks on optimization process of manufacturing system with stochastic breakdown and rework, *Applied Mathematics Letters*, Vol. 23, pp. 1152-1155, 2010.
- [25] S.K. Goyal, Integrated inventory model for a single supplier-single customer problem, *International Journal of Production Research*, Vol. 15, pp. 107-111, 1977.
- [26] R.M. Hill, Optimizing a production system with a fixed delivery schedule, *Journal of the Operational Research Society*, Vol. 47, pp. 954-960, 1996.
- [27] S. Viswanathan, Optimal strategy for the integrated vendor-buyer inventory model, *European Journal of Operational Research*, Vol. 105, pp. 38-42, 1998.
- [28] M. Khouja, Optimizing inventory decisions in a multi-stage multi-customer supply chain, *Transportation Research Part E: Logistics and Transportation Review*, Vol. 39, No. 3, pp. 193-208, 2003.
- [29] L. Lu, A one-vendor multi-buyer integrated inventory model, *European Journal of Operational Research*, Vol. 81, pp. 312-323, 1995.
- [30] A. Diponegoro and B.R. Sarker, Finite horizon planning for a production system with permitted shortage and fixed-interval deliveries, *Computers & Operations Research*, Vol. 33, pp. 2387-2404, 2006.
- [31] J.-T. Wong, The distribution processing and replenishment policy of the supply chain under asymmetric information and deterioration: Insight into the information value, *Expert Systems with Applications*, Vol. 37, pp. 2347-2353, 2010.
- [32] E.J. Lodree Jr., C.D. Geiger and K.N. Ballard, Coordinating production and shipment decisions in a two-stage supply chain with time-sensitive demand, *Mathematical and Computer Modelling*, Vol. 51, pp. 632-648, 2010.
- [33] S.W. Chiu, H.-D. Lin, C.-B. Cheng and C.-L. Chung, Optimal production-shipment decisions for the finite production rate model with scrap, *International Journal for Engineering Modelling*, Vol. 22, No. 1-4, pp. 25-34, 2009.
- [34] Y. Wu, A time staged linear programming model for production loading problems with import quota limit in a global supply chain, *Computers & Industrial Engineering*, Vol. 59, pp. 520-529, 2010.
- [35] S.W. Chiu, Y.-Sh.P. Chiu, L.-W. Lin and Y.-C. Lin, Production lot sizing with rework and fixed quantity deliveries, *International Journal for Engineering Modelling*, Vol. 23, No. 1-4, pp. 23-30, 2010.
- [36] N. Mishra, V. Kumar, N. Kumar, M. Kumar and M.K. Tiwari, Addressing lot sizing and warehousing scheduling problem in manufacturing environment, *Expert Systems with Applications*, Vol. 38, pp. 11751-11762, 2011.
- [37] S.W. Chiu, Y.-Sh.P. Chiu, C.-A.K. Lin and Ch.-Y. Chang, Solving finite production rate model with scrap and multiple shipments using algebraic approach, *International Journal for Engineering Modelling*, Vol. 23, No. 1-4, pp. 43-47, 2010.
- [38] R.L. Rardin, *Optimization in Operations Research*, Prentice-Hall, New Jersey, pp. 739-741, 1998.

## EFEKT PROMJENJIVE OTPREMNE UČESTALOSTI NA POLITIKU PROIZVODNJE I DISTRIBUCIJE U INTEGRIRANOM SUSTAVU PRODAVAČ-KUPAC

### SAŽETAK

Ovaj članak istražuje efekt promjenjive otpremne učestalosti na politiku proizvodnje i distribucije u integriranom sustavu prodavač-kupac. U nedavno objelodanjenom članku Chiu et al. [1] su izveli optimalno nadopunjavanje količine robe za problem ekonomske proizvodnje količine s višestrukom dostavom i osiguranjem kvalitete utemeljeno na pretpostavci da je broj otprema zadana konstanta. Međutim, u integriranom sustavu prodavač-kupac unutar okruženja distributivne mreže, zajednička odlučnost o nadopunjavanju količine robe i broj otprema mogu pomoći takvom sustavu da dobije značajne kompetitivne prednosti u smislu da postane jeftiniji proizvođač kao i da uspostavi uske veze s kupcem. Iz tog razloga, ovaj članak proširuje istraživanja koja su proveli Chiu et al. [1] uzimajući u obzir otpremnu učestalost kao jednu od odlučujućih varijabli kao i uključujući troškove držanja zaliha korisnika usluge u sistemsku analizu troškova. Za potvrdu konveksnosti funkcije troška koja sadrži dvije odlučujuće varijable korištene su Hessove matrice, a ujedno je istražen i efekt promjenjive otpremne učestalosti na politiku proizvodnje i distribucije. Jednim numeričkim primjerom pokazana je praktična primjena rezultata istraživanja.

**Ključne riječi:** promjenjiva otpremna politika, sustav proizvodnja-distribucija, distributivne mreže, sustav prodavač-kupac, količina robe, ponovni rad.