

# COMPRESSION OF LIMBS BY TIGHT BANDAGES: A THEORETICAL MODEL

Željko Šomodi, Emilija Zdraveva, Željka Pavlović  
University of Zagreb Faculty of Textile Technology

E-mail: zeljko.somodi@ttf.hr

Original Scientific Paper

UDK: [646.4+685.3+615.468]:616-001.35-047.58

## Abstract

Human body parts are sometimes compressed by tight clothes, footwear, bandages etc. Therefore, it is important to balance between functionality and comfort of garments in order to avoid negative effects on human health. Mechanical properties of both garment and tissue need to be taken into account for the analysis of pressure of tight garments. The thick walled tube theory is adjusted to a composite cylinder with a rigid core, as an approximate limb model with corresponding edge conditions. The results suggest the effect of tightness and elastic properties of the tissue and the tight garment on the level and type of tissue stresses.

## Key words

tight clothes and footwear, tissue stress, thick walled tube

## Introduction

Compressive activity on the human body occurs due to tight garments and footwear or in case of load bearing elements of equipment or devices such as e.g. pulley or similar. The application of compressive garments or elements is broad, including the field of medical therapy (i.e. compressive bandages), sportswear and equipment or in aesthetic garments [1, 2]. In the design of compressive bandages, it is important to understand the body part geometry along with bandage and tissue deformation characteristics [3]. Some studies concerning medical therapy applications have reported on a target pressure achievement through multi-layered bandages [4, 5]. Another study has analysed the effect of curved body part surface on compressive elastic garments pressure and the possibilities to provide the required equal pressure distribution [6].

This work is an overview of basic mechanical tools, which can be used in the analysis of body parts exposed to compressive tight clothing, belts, bandages



Figure 1. Lower leg deformation by a tight sock cuff

etc. The motivation for this work is an attempt to prevent common deformations of the lower leg caused by a tight elastic reinforced socks cuff, Figure 1. This article is a continuation of a previous detailed study of the aforementioned deformation [7] by Šomodi et al.

A similar effect occurs due to a tightly fit belt as a piece of clothing or footwear. If we aim to analyse the transitional phase of deformation from the moment of stretching to the final state of equilibrium deformation, the viscoelastic (attenuating) behaviour of the tissue should be taken into consideration. The latter will not be considered here, thus the final equilibrium condition will be considered important. Therefore, this work will be limited to a simple linear elastic model of the material's deformational behaviour.

## Cylinder compressed by tight elastic tube

We shall first consider a homogeneous elastic cylinder with a tightly fit thin walled elastic tube. Figure 2 gives the cross section of cylinder 1 with a tightly fit tube 2. In the initial non-deformed state, the thin tube radius is smaller than the cylinder radius for the given initial overlap,  $\Delta R$ , which can be defined as tightness.

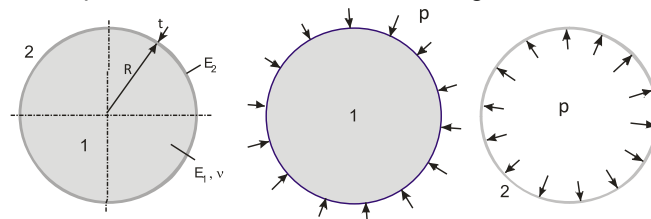


Figure 2. A set of cylinder and a tightly fit thin walled tube

In the cylinder and tube assembly, there is a mutual pressure ( $p$ ) action due to overlap. The amount of this pressure is a result of the reduced radius of the cylinder and the increased radius of the tube that will

compensate the initial overlap  $R$ . The stress in the cylinder corresponds to the uniform double pressure  $2p$ , while there is a circular stress  $\sigma_\varphi = pR/t$  in the tube, as shown in Figure 3.

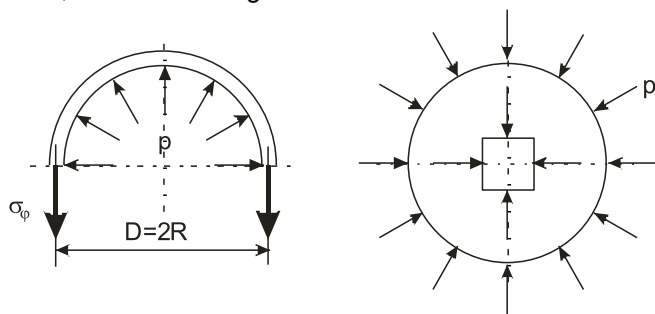


Figure 3. Stress state in a tube and a cylinder

Based on Hook's law, the cylinder and tube deformations are as follows:

$$\Delta R_1 = \frac{pR}{E_1} (1 - \nu) , \quad \Delta R_2 = \frac{pR^2}{tE_2} \quad (1)$$

Based on the deformation conditions, the cylinder and tube pressure are as follows:

$$\Delta R_1 + \Delta R_2 = \Delta R \Rightarrow p = \frac{\Delta R}{\frac{R}{E_1}(1-\nu) + \frac{R^2}{tE_2}} \quad (2)$$

In case of an inhomogeneous i.e. composite cylinder, or a cylinder with a rigid or hollow core, the situation becomes more complex as the stress in the cross section is not constant. In case of rotational symmetry (i.e. a set of concentric tubes), the analysis can be conducted on the basis of the theory of thick walled tubes.

### Fundamental theory of thick walled tubes

The theory of thick walled tubes is a standard content of advanced mechanics of materials [8]. Thanks to the rotational symmetry in both geometry (marked area by two concentric circles) and loading (uniform internal or external surface pressure), it is convenient to use polar coordinates (Figure 4), while the stresses and displacements depend only on the radial coordinate  $r$ .

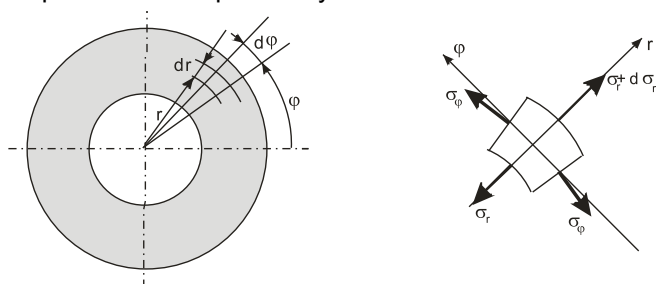


Figure 4. Thick walled tube cross section in polar coordinates and the stresses in the tube element

The static condition results from the forces equilibrium on the differential element (Figure 4). The equation of the forces equilibrium in the  $r$  direction is as follows:

$$-\sigma_r \cdot r d\varphi + (\sigma_r + d\sigma_r)(r + dr)d\varphi - \sigma_\varphi \cdot dr \sin \frac{d\varphi}{2} \cdot 2 = 0 \quad (3)$$

The sine of a differential small angle is almost equal to the real angle. After neglecting the small value of higher order, this equation becomes as follows:

$$(\sigma_r - \sigma_\varphi)dr + r d\sigma_r = 0 \quad (4)$$

The geometric considerations of the deformed state give the relative deformations expressions in the radial and circumferential direction depending on the radial displacement  $u(r)$ :

$$\varepsilon_r = \frac{du}{dr} , \quad \varepsilon_\varphi = \frac{u}{r} \quad (5)$$

Hook's law gives the relation between the stress and strain in linear elastic deformation:

$$\varepsilon_r = \frac{1}{E}(\sigma_r - \nu\sigma_\varphi) , \quad \varepsilon_\varphi = \frac{1}{E}(\sigma_\varphi - \nu\sigma_r) \quad (6)$$

When the system of equations (4, 5, 6) is solved by the unknown stress components, the result is as follows (details are not given here):

$$\sigma_r = C_1 + \frac{C_2}{r^2} , \quad \sigma_\varphi = C_1 - \frac{C_2}{r^2} \quad (7)$$

The constants  $C_1$  and  $C_2$  come from the internal and external tube edge condition, where the radial stress corresponds to the given pressure.

As a typical example, we can consider a thick tube with an internal pressure  $p$ , whose inner and outer radius is  $R_1=R$ ,  $R_2=2R$ . The first equation (7) gives the conditions of the inner and outer edges:

$$-p = C_1 + \frac{C_2}{R^2} , \quad 0 = C_1 + \frac{C_2}{4R^2} \quad (8)$$

The solutions of the system (8) are as follows:

$$C_1 = \frac{1}{3}p , \quad C_2 = -\frac{4}{3}pR^2 \quad (9)$$

The final expressions of the radial and circular stresses are:

$$\sigma_r = \frac{p}{3} \left( 1 - 4 \frac{R^2}{r^2} \right) , \quad \sigma_\varphi = \frac{p}{3} \left( 1 + 4 \frac{R^2}{r^2} \right) \quad (10)$$

These expressions represent the distribution of the radial and hoop stress component on the tube cross section.

The distribution is given in Figure 5. The hoop stress is tensile (positive), while the radial stress is negative, i.e. compressive. The highest value of a particular stress component is the hoop stress on the inner edge of the tube cross section, which is  $\sigma_{\max} = 5/3 p$ .

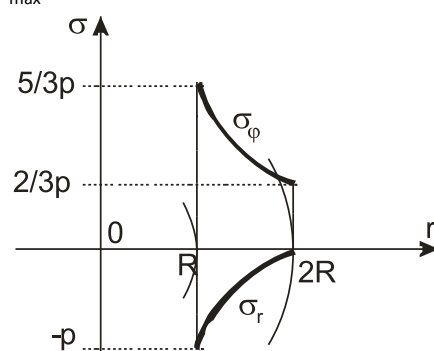


Figure 5. Distribution of the hoop and radial stresses of the internal pressure loaded tube

Technical applications are mainly based on the given theory, i.e. gun barrel loaded by an internal release pressure, and a tighten shaft-hub coupling. Here, the possibility of the thick walled tube theory is used in case

of an elastic cylinder with a rigid core, which can be considered as an approximate model for the limbs loaded by an external pressure as a result of a tightly fitted clothing, footwear or similar.

### Cylinder with rigid core compressed by tight tube

Due to simplicity, the limb will be modelled as a composite cylinder comprising a rigid core (bone) and an elastic external shell which represents the muscle, tendon, fat and skin tissues. The external pressure due to tightly fitted thin tube is also present.

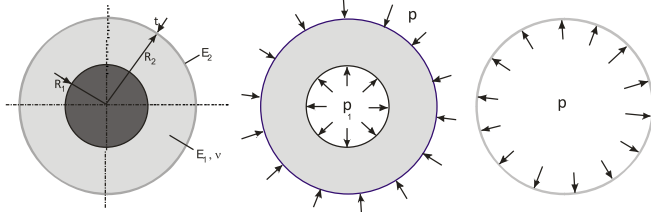


Figure 6. Assembly of a cylinder with a rigid core and a tight thin tube (left), pressures on the elastic part of the cylinder and the tube.

In the assembly, there is the pressure between the cylinder and the thin tube and pressure  $p_1$  (Figure 6) on the inner edge of the cylinder due to core resistance.

Although the pressures  $p$  and  $p_1$  are yet unknown, the edge conditions of the thick tube – the soft tissue are as follows:

$$\sigma_r(R_2) = -p \quad , \quad \sigma_r(R_1) = -p_1 \quad (9)$$

The deformation conditions should be met as well: on the internal edge, the radial displacement is equal to zero due to rigid core resistance, while at the external edge as earlier, the radial displacement and extension of the tightly fitted tube together correspond to the initial overlap  $\Delta R$ :

$$u(R_1) = 0 \quad , \quad -u(R_2) + \Delta R_{cylinder} = \Delta R \quad (10)$$

Based on the equations (5, 6, 7), radial displacement  $u(r)$  is given as:

$$u = \frac{r}{E_1} \left[ C_1(1 - \nu) - \frac{C_2(1 + \nu)}{r^2} \right] \quad (11)$$

Now finally from the equations (9, 10, 11), the expression of the pressure is as follows:

$$p = \frac{\Delta R}{\frac{R_2^2}{E_2 t} + \frac{R_2}{E_1} \left[ \frac{1 - \nu}{1 + \frac{(R_1)^2}{R_2^2} \frac{1 - \nu}{1 + \nu}} - \frac{1 + \nu}{\left(\frac{R_2}{R_1}\right)^2 \frac{1 + \nu}{1 - \nu} + 1} \right]} \quad (12)$$

We shall conclude this chapter with an illustrative example. The Young's module  $E_2$  and radius  $R_2$  are given with other dependent parameters, expressed as follows:  $E_1 = 0,05E_2$ ,  $R_1 = 0,5R_2$ ,  $t = 0,02R_2$ ,  $R = 0,2R_2$ . We shall consider three cases with three different possible values of the Poisson's ratio: a)  $\nu = 0$ , b)  $\nu = 0,3$ , c)  $\nu = 0,5$ . The pressure  $p$  values calculated according to equation (12) are: a)  $p = 0,0032258 E_2$ ; b)  $p = 0,0033753 E_2$ ; c)  $p = 0,0035135 E_2$ . In this case, the displacement

calculation shows that approximately 80...88% of the initial overlap covers the deformation of tube 2, while the rest is due to tissue deformation. Finally, the radial and hoop stress components of the tissue cross sections are determined, as shown in the diagram of Figure 7.

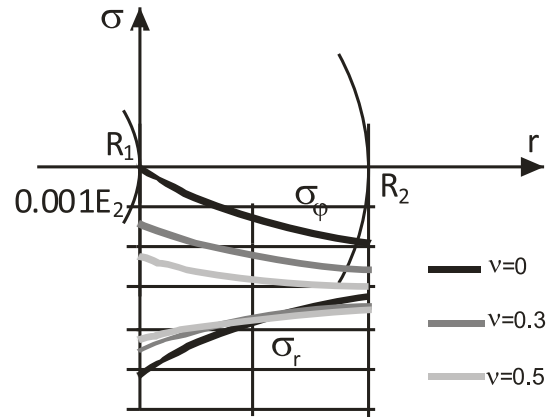


Figure 7. Stresses distribution in the results of the numerical example

The stresses are compressive. It can be observed that the values of radial stresses are greater than the hoop stresses. This difference is more pronounced in the tissue close to the bone, while the stress on the surface is closer to the uniform biaxial pressure. With the increase of the Poisson's ratio, the differences between the hoop and radial stresses in the elastic part of the cylinder reduce, as well as by the increase of the radial coordinate  $r$ . It is interesting that at  $\nu = 0$ , the hoop stress near the bone disappears, which happens due to the fact that the radial displacement equals to zero at this point.

### Conclusion

The stresses in the tissue caused by tightly fitted clothing, footwear or similar can be approximately analysed by the application of the aforementioned mechanical models. The example of the cylinder with the rigid core requires edge conditions, which unlike the standard usage of the thick walled tube theory, uses displacements and not only stresses. In the illustrative example, the typical tissue stress distributions are given as well as the effect of the Poisson's ratio. For the purpose of a more realistic description of the situation where the pressure is due to a tightly fitted textile garment (e.g. socks), a suitable approximation of the nonlinear tensile behaviour of the textile material can be taken instead of the linear elastic behaviour of the thin tube, causing the model to become slightly complex. The model of the homogeneous soft tissue can be replaced by the more advanced model which takes into account different deformational properties of the e.g. muscle tissue and the fat under the skin tissue. In this regard, if the geometric distribution of certain types of tissue retain the axial symmetrical character, a two concentric homogeneous tube assembly of different properties  $E_i$  can be used instead of a homogeneous tube as a soft tissue model. Finally, if the known tissue

distribution with different properties along the limbs cross sections cannot be expressed as an axially symmetrical model, the experiment will require a more complex numerical modelling, i.e. a finite element analysis.

## References

- [1] MacRae, B. A.; Cotter, J. D.; Laing, R. M. 2011. Compression Garments and Exercise, Garment Considerations, Physiology and Performance. *Sports Medicine* 41, 10, 1 – 29.
  - [2] Xiong, Y.; Tao, X. 2018. Compression Garments for Medical Therapy and Sports. *Polymers* 10, 6, 663.
  - [3] Chattopadhyay, R.; Bera, M. 2017. Prediction of Pressure due to Elastic Fabric Tube Following Energy Principle. *Journal of Textile Engineering and Fashion Technology* 2, 5, 00075.
  - [4] Thomas, S. 2002. The use of the Laplace equation in the calculation of sub-bandage pressure. *World Wide Wounds* 3, 1, 21 – 23.
  - [5] Sikka, M. P.; Ghosh, S.; Mukhopadhyay, A. 2016. Mathematical modeling to predict the sub-bandage pressure on a conical limb for multi-layer bandaging. *Medical Engineering & Physics* 38, 9, 917 – 921.
  - [6] Kowalski, K.; Mielicka, E.; Kowalski, T. M. 2012. Modelling and Designing Compression Garments with Unit Pressure Assumed for Body Circumferences of a Variable Curvature Radius. *Fibres & Textiles in Eastern Europe* 206 A, 95, 98 – 102.
  - [7] Šomođi, Ź.; Pavlović, Ź.; Zdraveva, E.; Vrljićak, Z. 2019. An Introductory Computational Deformational Model of Limb-Sock Interaction. *Book of Proceedings – 12<sup>th</sup> International Scientific-Professional Symposium Textile Science & Economy 2019 French-Croatian Forum*. Novak, I. (ur.). University of Zagreb Faculty of Textile Technology. Zagreb, 123 – 130.
- Alfirević, I. 1975. *Viša nauka o čvrstoći I*. Sveučilišna naklada Liber. Zagreb.



# JELen

PROFESSIONAL

## SPECIJALNA OBUĆA ZA SPECIJALNE IZAZOVE

Posebni napori i nepovoljni vanjski utjecaji, zahtijevaju specijalnu opremu otpornu na proklizavanje i mehaničke udarce. Izloženost različitim klimatskim uvjetima zahtjeva podjednako dobru izolaciju na visoke i niske temperature, vodonepropusnost, prozračnost i lakoću. Zadovoljavanje tako velikom broju kompleksnih uvjeta, moguće je jedino kombinacijom najsuvremenijih tehnologija, materijala, znanja i iskustva.



## One step further

### JELen PROFESSIONAL d.o.o.

Zagrebačka 93, 40 000 Čakovec - HR

Tel: +385 (0)40 384 888 ■ Fax: +385 (0)40 384 316

E-mail: jelen@jelen.hr

### PRODAJA ZAŠTITNE OBUĆE

Tel: +385 (0)40 384 868 ■ Fax: +385 (0)40 384 316

E-mail: prodaja@jelen.hr

[www.jelen.hr](http://www.jelen.hr)