

VELJKO RADIČEVIĆ, Ph.D.¹

(Corresponding author)

E-mail: veljkoradi@gmail.com

NIKOLA KRSTANOSKI, Ph.D.²

E-mail: nikola.krstanoski@tfb.uklo.edu.mk

MARKO SUBOTIĆ, Ph.D.³

E-mail: marko.subotic@sf.ues.rs.ba

¹ Technical College of Applied Sciences

Uroševac (Leposavić)

24. Novembra bb, 38218 Leposavić, Serbia

² University "St. Kliment Ohridski"

Faculty of Technical Sciences

Makedonska falanga 37, 7000 Bitola, North Macedonia

³ University of East Sarajevo

Faculty of Transport and Traffic Engineering

V. Mišića 52, 74000 Doboj, Bosnia and Herzegovina

Science in Traffic and Transport

Original Scientific Paper

Submitted: 13 Jan. 2020

Accepted: 15 Apr. 2020

NEW APPROACH TO ESTIMATING THE SATURATION FLOW RATE OF A SHARED LANE WITH PERMITTED LEFT TURNS

ABSTRACT

The estimation of the saturation flow rate is of utmost importance when defining the signal plan at intersections. Because of the numerous influential factors, the values of which are hard to be determined, the subject problem is to be regarded as an extremely complex one. This research deals with the estimation of a saturation flow rate of a shared lane with permitted left turns. The suggested algorithm is based on the application of the artificial neural networks where the data for training are received by simulation. The results obtained by the neural networks are compared with multiple linear regression and the known HCM 2010 approach for determining the saturated flow of a shared lane. The testing data have shown that the approach based on the artificial neural networks foresaw statistically significantly better values than the ones obtained by multiple linear regression, with an error of 27 veh/h against 49 veh/h. The HCM 2010 approach is significantly worse than the two others included in this research. The ways of the future development of the suggested method could include additional factors, such as the grade of the traffic lane, the proximity of the bus stops, and others.

KEY WORDS

artificial neural networks; multiple regression; permitted left turns; shared lane; simulation;

1. INTRODUCTION

The saturated flow rate is seen as the maximum number of vehicles that the traffic lane can serve when assigned the green time for an hour. When

determining the signal plans at the intersections, the capacity of the traffic lane directly depends on the value of the saturated flow rate. A wrong estimate of the saturation flow rate of the lane can lead to bad signal plans, which consequently leads to unnecessary additional vehicles delay and longer queues when approaching the intersections. All of this results in a drop in the level of service (LOS).

The estimation of the lane saturation flow rate, especially when it comes to a Shared Lane with Permitted Left Turns (SLPLT), presents a complex problem. The saturation flow rate can be measured in the field, by recording an average headway, i.e. the average time between two consecutive vehicles departing from a lane [1]. These kinds of measurements are not easy to perform for SLPLT because the average headway has significant variations depending on the factors influencing the left turns (the input variables into the model suggested in this paper).

Due to the importance and complexity of the problem, a lot of authors have considered different approaches and developed different models for the estimation of the saturation flow of SLPLT. The estimation of the saturation flow on the example of more traffic lanes, based on a regressive analysis, was given in paper [2]. In paper [3] the software for controlling the traffic in real-time "PRODYN" was used for the purpose of estimating the saturation flow rate of SLPLT. An author in [4] suggests an estimation model of SLPLT, based on the new

analytical dependencies of the saturation flow and influential factors. The results show the advantages of this model compared to the HCM 2010 method. Authors in [5] developed a hybrid model for SLPLT estimation based on simulation. The suggested model showed its advantages over the HCM 2010 model. Authors in [6] compare three methods for the estimation of the saturation flow rate of shared lanes: Highway Capacity Manual 2010 (HCM2010), Australian Road Research Board (ARRB) and the Canadian methods. The results show that the ARRB method gives the values which are the closest to those measured in the field. Authors in [7] dealt with the impact of motorcycle drivers on the saturation flow rate of shared lanes. The results show a considerable dependence and recommendation that this group of drivers should be taken into account when designing and estimating the signal plans at intersections.

Authors in [8] dealt with the dependence of the saturation flow rate in the function of socio-demographic factors such as area population, average age, average income and average trip distance. In paper [9] an algorithm was developed for the estimation of the saturation flow rate in the case of a longer time cycle. The estimation of the saturation flow at intersections with extremely heterogeneous traffic flow can be found in paper [10]. Lane Utilization Analysis of SLPLT was shown in paper [11]. Authors in [12] dealt with the problem of estimating the saturation flow for the shared right-turn lanes.

On the example of the intersections in China, the authors concluded that the HCM 2010 method had underestimated the influence of pedestrians on the saturated flow. The application of video cameras and detectors for the estimation of the saturated flow of shared lanes can be found in papers [13, 14]. The idea of implementing the left-turn waiting areas, for the purpose of increasing the intersection capacity can be found in paper [15]. A model for determining the saturated flow of exit lanes for left-turn intersections can be seen in paper [16]. The saturation flow rate analysis under the automated vehicle environment can be found in paper [17].

Since we are dealing with a complex problem, although numerous works exist, there is space for further research. Previous studies did not deal considerably with the possibilities of forecasting the saturated flow based on the values that were already measured. Besides, all the possibilities of the con-

temporary method of machine learning in the estimation of the saturated flow of SLPLT were not examined.

In this paper, the author deals with the application of Multiple Linear Regression (MLR) and Artificial Neural Networks (ANN) on the problem of the saturated flow SPLPT estimation. For different values of the pre-defined influential factors, the values of the saturated flow of SLPLT were determined using the simulation approach. These data were then used for the process of training in the stated methods. The results obtained by MLR and ANN were compared with those provided by the commonly known HCM 2010 approach. As far as the author is concerned, this kind of approach has not been used for the consideration of the subject problem so far.

After the introductory considerations, the second Section is dedicated to the setting and description of the problem in question. In the third Section, all the models for the SLPLT estimation are explained. The results which were obtained and the discussion about them is the content of Section IV. The last, fifth Section is dedicated to conclusive considerations and the directions of future research.

2. PROBLEM DESCRIPTION

In this paper, the problem of the estimation of the saturation flow rate of a Shared Lane with Permitted Left Turns (SLPLT) is being considered. It is not often easy to determine the saturation flow rate of a shared lane because of numerous factors influencing that value. This task is additionally complicated when one traffic lane serves the flows of different directions, as it is the case with SLPLT.

The drivers look for an acceptable gap in the opposing flow to perform the movement of left turns. The block of a traffic lane appears during the period when the vehicles cannot find the gap in the opposing flow and the saturated flow is reduced. During the left-turn movements, it often happens that the vehicles are served together with the pedestrians, which additionally influences the saturated flow. Besides, commercial vehicles and public transport vehicles influence the speed of the traffic flow and the value of the saturated flow rate is thus reduced. Accordingly, this paper will consider the following influential factors on the saturated flow of SLPLT, which at the same time represent the input variables for the estimation models: X_1 – proportion of left turns in the shared lane (%);

X_2 – opposing demands (pcu/h); X_3 – pedestrian conflict demands (ped/h); X_4 – proportion of heavy vehicles in the shared lane (%).

The saturated flow can be influenced by other factors, such as the lane width, the proximity of public transport stations, the grade of the traffic lane, etc. Let us assume that these and the other factors have no influence on the saturated flow.

The procedure for the prediction of the saturated flow can be divided into three phases (Figure 1). The first phase is generating the input parameters and obtaining the results by simulation. The second phase represents the application of different analytical models for the estimation of the saturation flow value. The third phase refers to the evaluation of the results obtained by all methods. The evaluation criteria are the deviation of analytically obtained saturation flow values from those obtained by simulation.

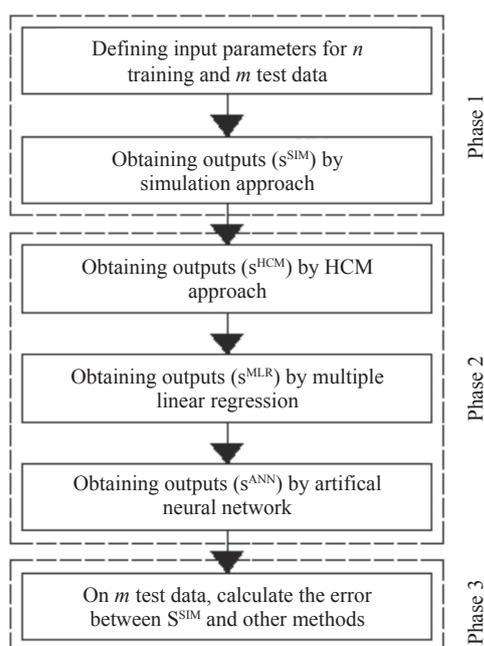


Figure 1 – Modelling phases in the estimation of saturation flow rate

The explanations for each of the phases in Figure 1 are as follows:

Phase 1: To generate n pairs of the input data randomly. The range in which the input variables are to be found is shown in Table 1.

The simulation was performed in the software package *Synchro 7*. For each data, five simulations were performed with a different number of seeds. The seeds took the following values: 10, 20, 30, 40 and 50. A different number of seeds is needed so

Table 1 – Domains for input variables

Variable	Domain
X_1 [%]	[10, 50]
X_2 [pcu/h]	[50, 400]
X_3 [ped/h]	[50, 500]
X_4 [%]	[5, 15]

that the simulation could take into account different patterns of vehicle arrivals. The final value for each data (s^{SIM}) represents the average value of five simulation runs and is shown in the Appendix. During the simulation, the following parameters were used:

- speed of the cars in the flow: 48-58 km/h;
- speed of the commercial vehicles in the flow: 40-45 km/h;
- left turning speed: 30-35 km/h;
- warm-up time: 100 s.

These values, obtained by simulation, will be marked by s^{SIM} .

Phase 2: Using n input/output pairs of data for the calculation models of the saturated flow. The first model is based on the HCM 2010 procedure and the generated values will be marked by s^{HCM} . The second model is based on the multiple regression analysis and the generated values will be marked by s^{MLR} , while the third model is based on the artificial neural networks and the generated values will be marked by s^{ANN} .

Phase 3: To use n of the input data for testing the efficiency of all three suggested models. The results obtained by simulation are considered to be meritory and the errors of the suggested models will be calculated accordingly.

It is not easy to generalize different measurements from the field to adopt them as meritory at all the intersections. One general model obtained by simulation, under the value of the simulation parameters given, can be considered precise enough to be adopted as meritory for the requirements of this paper.

3. CALCULATION MODELS

In this paper, three models for the calculation of the saturation flow of SLPLT will be used. The first one is the analytical approach, based on HCM 2010 calculations. The second approach assumes the multiple regression analysis based on the input/output pairs of data generated by simulation. The third is the approach which implies the use of artificial neural networks as a universal approximator.

3.1 HCM 2010 approach

The HCM 2010 procedure offers eleven correction factors which reduce the base value of 1,900 pcu/h (passenger car units per hour). According to the adopted criteria for the calculation of the saturated flow, the following formula will be applied:

$$s = s_o \cdot f_{HV} \cdot f_{LT} \cdot f_{Lpb} \quad (1)$$

where:

s – saturation flow rate for the subject lane [veh/h/ln];

s_o – base saturation flow rate per lane = 1,900 pcu/h/ln;

f_{HV} – adjustment factor for heavy vehicles in a traffic stream;

f_{LT} – adjustment factor for left turns in the lane;

f_{Lpb} – pedestrian adjustment factor for left-turn movements.

The adjustment factor for heavy vehicles in the traffic stream is calculated as follows [1]:

$$f_{HV} = \frac{100}{100 + P_{HV} \cdot (E_T - 1)} \quad (2)$$

where:

P_{HV} – proportion of heavy vehicles for lane demands;

E_T – passenger-car equivalent (E_T usually equals 2).

The saturated flow represents a maximum number of vehicles that the traffic lane can serve during 3,600 seconds. To enable the application of the HCM 2010 procedure for the saturation flow, an assumption has been introduced that the green time of the shared lane is $g=3,600$ s.

The green time should be divided into two periods. During the first period, the shared lane is blocked because the left-turning vehicles cannot filter themselves through the opposing flow. This time is marked by g_q . During the second period, $g-g_q$, vehicles manage to find a gap through the opposing flow and the lane is released.

The adjustment factor for the left-turns in the shared lane with a permitted left turn is calculated as follows [1]:

$$f_{LT} = \frac{g - g_q}{g} \cdot \frac{1}{1 + P_L (E_{L1} - 1)} \quad (3)$$

where P_L is the proportion of the left-turning vehicles in a shared lane [veh/h/ln].

Part of time g during which a shared lane is being blocked (g_q) is calculated as follows [1]:

$$g_q = 4.943 \cdot q_{opp}^{0.762} \quad (4)$$

where q_{opp} represents the opposing demands [veh/h].

A through-car equivalent for permitted left turns (E_{L1}) is calculated as follows [1]:

$$E_{L1} = \frac{s_{HT}}{s_{LT}} - 1 \quad (5)$$

where:

s_{HT} – saturation flow of through traffic = 1,900 veh/h/ln;

s_{LT} – filter saturation flow of permitted left turns [veh/h/ln].

$$s_{LT} = \frac{q_{opp} \cdot e^{\left(\frac{-q_{opp} \cdot t_c}{3600}\right)}}{1 - e^{\left(\frac{-q_{opp} \cdot t_f}{3600}\right)}} \quad (6)$$

where:

t_c – critical gap = 4.5 s;

t_f – follow-up headway = 4.5 s (shared lane), 2.5 s (exclusive lane).

Pedestrian adjustment factor for left-turn movements is calculated as follows [1]:

$$f_{Lpb} = 1 - P_L \cdot \left(1 - \left(1 - \frac{q_{ped}}{2000}\right)\right) \quad (7)$$

where q_{ped} are the pedestrian demands [ped/h].

3.2 Multiple linear regression

Multiple Linear Regression (MLR), known as a machine learning method, is used in many fields of science for data forecasting. Some examples of MLR application for saturated flows can be found in [18, 19], but, as far as we know, there is no application of the MLR on the saturated flow of SLPLT. The input data for the MLR are represented by a set of independent variables, while the output variable is dependent on the input. The assumption that the output variable depends on the input ones can be described linearly. According to this, the following linear equation is introduced:

$$S^{MLR} = a + b_1 \cdot X_1 + b_2 \cdot X_2 + b_3 \cdot X_3 + b_4 \cdot X_4 \quad (8)$$

where b_i are the coefficients and a is an intercept.

For the optimization of the regression coefficients and intercept, the following model of combinatorial optimization is set:

Minimize

$$F = \sqrt{\frac{\sum_{i=1}^n (s_i^{SIM} - s_i^{MLR})^2}{n}} \quad (9)$$

subject to:

$$a_{min} \leq a \leq a_{max} \quad (10)$$

$$b_{jmin} \leq b_j \leq b_{jmax} \quad (11)$$

Fitness function F (Equation 9) minimizes the difference between the saturated flow obtained by the simulation and the saturated flow obtained by MLR for all the n pairs of the training data. Constraint 10 defines the interval for the feasible intercept values. Constraint 11 defines the interval of the values for the feasible coefficients.

The initial values of coefficients and the intercept are obtained by data analyses which have been implemented in the software *Microsoft Excel*. The final solutions of coefficients and the intercept are obtained by a genetic algorithm, implemented in the *Matlab* software.

Genetic algorithms rest on natural selection principles. Only the individuals who adapted best to the environment and remained strong would have the opportunity to leave their genetic material for future generations. When this kind of logic is copied so that it can be applied for solving the combinatorial optimization problems, the individuals are the key to the solution. In this case, the individual represents the following set $[a, b_1, b_2, b_3, b_4]$. Each individual is assigned a concrete value of the fitness function F . At the beginning of the algorithm, the initial generation of individuals is being generated. Each generation goes through the processes of selection of individuals for the crossover, crossover and mutation, so the next generation of individuals could be produced. This procedure is being generated in iterations until the maximum number of generations, which has previously been defined, is reached. The more detailed explanations of this algorithm and the processes which are being performed on the generations of individuals can be found in the following books [20, 21].

The justification of the genetic algorithms application lies in the fact that we are dealing with the problem of difficult combinatorial optimization, which has been known in the literature so far. Some of the works which show this are the following ones [22, 23, 24]. The minimum and the maximum values for a and b_j are adopted considering the initial solution so that they can cover sufficient space of feasible solutions. In this very case, the maximum and the minimum value of these coefficients is 3,000 and -100, respectively. The parameters of genetic algorithms which have been used for solving the problem are the following:

- way of selection: proportional;
- crossover probability: 30%;
- mutation probability: 4%;

- maximum number of generation: 100;
- population size: 10.

The following equation of multiple linear regression has been obtained:

$$s^{MLR} = 2274.748 - 10.362 \cdot X_1 - 1.001 \cdot X_2 - 0.524 \cdot X_3 - 7.085 \cdot X_4 \quad (12)$$

The multiple coefficient of correlation R_{mul} is thus calculated:

$$R_{mul} = \frac{SD(s^{MLR})}{SD(s^{SIM})} = 0.954 \quad (13)$$

where SD is the marked standard deviation.

Adjusted R (R_{adj}) is calculated as follows:

$$R_{adj} = 1 - \frac{1 - R_{mul}^2 \cdot (n - 1)}{n - k - 1} = 0.906 \quad (14)$$

where n is the number of training data, and k is the number of variables.

R_{mul} is a correlation factor which shows the percentage of variation explained by a regression model out of the total variation. By increasing the number of variables, R_{mul} will always grow, which can lead to an overfit model. R_{adj} is the factor of correlation which penalizes the adding of new variables without an important share in the improvement of the existing model. When it comes to the measure of the model quality of the multiple linear regression, the correlation factor R_{adj} is relevant.

Attempts were also made with multiple regression, where the input parameters were described by the polynomial of degree two, but no improvement in the R_{adj} value was noticed.

3.3 Artificial neural network

The Artificial Neural Network (ANN) is a mathematical algorithm which imitates the neural network in a human brain. ANN can solve complex problems where the task is to copy one set of input data into the output function, so they are also called the universal approximators. Using the data from the past, assigned in advance, ANN learns from them. When given the unknown input data, ANN can perform a prediction of their outputs based on the previous experience obtained by learning. ANN is made of layers, each of which contains a certain number of neurons. The neurons of one layer are connected only with the neurons of the next layer. The architecture of such a neural network, called the multilayer perceptron, suited for the subject problem, is given in *Figure 2*.

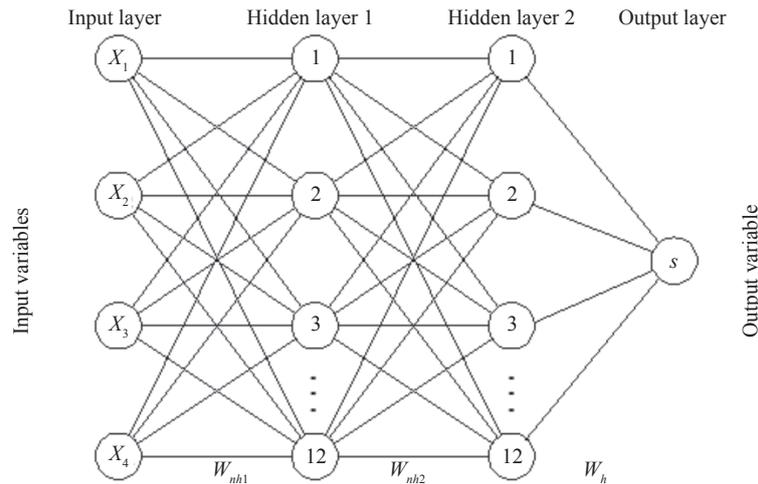


Figure 2 – Neural network architecture

There are three types of layers in the neural network in Figure 2: the input, the output and between them, a hidden layer. Mathematically speaking, if h is the index of the neurons in the hidden layers which count up to H , and n is the index of the neurons in the output layer which count up to N , the neural network from Figure 2 can be described as follows [25]:

$$s = f_1 \left(\sum_{h=1}^H O_h \cdot w_h \right) \tag{15}$$

$$O_h = f_2 \left(\sum_{n=1}^H X_n \cdot w_{nh} \right) \tag{16}$$

where:

- s – output from the ANN;
- O_h – output of the h -th hidden node;
- w_{nh} – weight between the n -th node of the input and h -th node of the hidden layer;
- w_h – weight between the h -th node of the hidden layer and the output layer;
- X_n – inputs to the ANN;
- f_1 and f_2 – activation functions.

The most frequently used activation function is a sigmoid function:

$$f(X) = \frac{1}{1 + e^{-X}} \tag{17}$$

Adjusting the weights w_{nh} and w_n , with minimizing some of the criterion functions, present the training process for ANN. The “backpropagation” is one of the most applied learning algorithms for ANN. Starting from the output layer, through the hidden layers, to the input layers, this algorithm calculates the error for each node of the neural network. The error represents a difference between the obtained and the desired value of the output function. The algorithm procedure is being repeated through the epochs until the minimum value of the error is reached. In one epoch, error E can be calculated as follows:

$$E = \sum_{n=1}^N \frac{1}{2} \cdot \|d_p - o_p\|^2 \tag{18}$$

where:

- n – neuron index, $n=1, 2, \dots, N$;
- d_p – desired output;
- o_p – obtained output.

The evaluation of the error through the epochs is given in Figure 3. The number of epochs is set in advance to the value of 1,000.

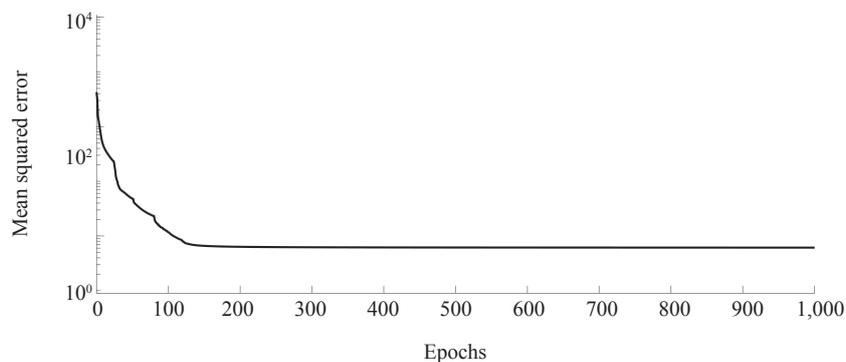


Figure 3 – Error evaluation through the epochs

The backpropagation algorithm is suggested by the authors in [26], where more details about the calculations bound to the adjustment of weight of neurons, i.e. training of the neural network, can be found.

During the development of the neural network architecture, one of the main tasks has been to determine the number of hidden layers, as well as the number of neurons in them, so that the best possible dependence of input and output data is obtained. In this paper, it has been achieved by a simple method of trials and failures. The author stayed on certain values (Figure 2: two hidden layers with 12 neurons each) when he was satisfied with R parameter (known statistical measures for goodness-of-fit). If we mark the fit line from Figure 4 by $y=ax+n$, the a and n parameters take the values 1 and -25, respectively, while R equals 0.9939.

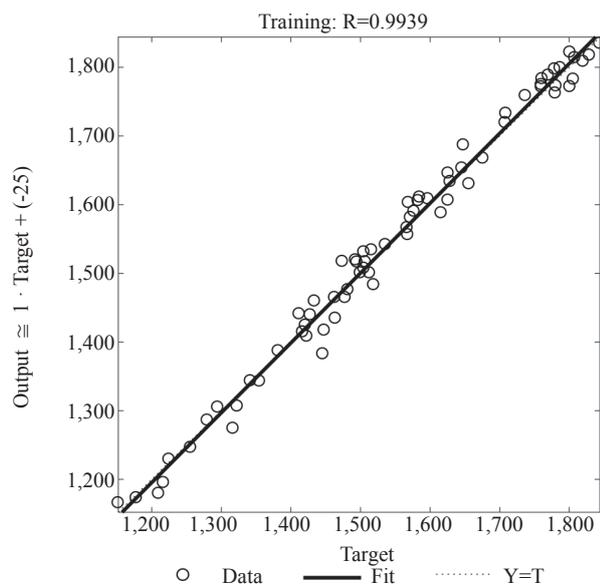


Figure 4 – Observed and forecast saturation flows using the best ANN model

More about the architecture and the ANN types, about the new scientific knowledge and achievements, can be found in book [27].

4. RESULTS AND DISCUSSION

A numerical example on which the suggested methods will be tested represents the last 20 input data which have not been taken into consideration for the multiple linear analysis and the artificial neural network models. In other words, a comparison of

the three suggested models will be performed on the unknown input parameters. In Table 2, the testing results are shown for each of the suggested methods.

The errors for each of the three suggested models were marked by σ^{HCM} , σ^{MLR} and σ^{ANN} , respectively. The marked errors are calculated in the following way:

$$\sigma^{HCM} = \sqrt{\frac{\sum_{m=1}^{|M|} (s_m^{HCM} - s_m^{SIM})^2}{|M|}} = 311 \tag{19}$$

$$\sigma^{MLR} = \sqrt{\frac{\sum_{m=1}^{|M|} (s_m^{MLR} - s_m^{SIM})^2}{|M|}} = 49 \tag{20}$$

$$\sigma^{ANN} = \sqrt{\frac{\sum_{m=1}^{|M|} (s_m^{ANN} - s_m^{SIM})^2}{|M|}} = 27 \tag{21}$$

The smallest error will be the measure for the quality of all three methods. Table 2 also presents an absolute difference (in veh/h) between the evaluated values of the saturated flow and the values obtained by simulation. These values will be marked by $diff^{HCM}$, $diff^{MLR}$ and $diff^{ANN}$, according to the names of the suggested methods (shown in Figure 5).

The HCM 2010 method showed the worst results with the error value $\sigma^{HCM} = 311$ veh/h. This method was commonly used in practice because of its uniformity and simplicity. With some other lanes, this error would have probably been smaller, which can supply space for further research. The reason for this kind of thinking is that the shared lane with permitted left turns is one of the most difficult lanes for the precise analytical calculation of the saturated flow.

The error value of the two remaining methods, σ^{MLR} and σ^{ANN} , is 49 veh/h and 27 veh/h, respectively, which is considerably smaller compared to the HCM 2010 method. The close value of the error obtained by the MLR and ANN methods conditions the presentation of the evidence that there is a statistically significant difference between them. If this difference exists, it can be concluded that the ANN method is better than the MLR method. The data on which the statistical method will be tested are $diff^{MLR}$ and $diff^{ANN}$ (provided in Table 2 and Figure 5).

A t-test was applied to confirm the statistical difference between MLR and ANN results:

$$t = \frac{\overline{diff^{ANN}} - \overline{diff^{MLR}}}{\sqrt{\frac{SD(diff^{ANN})^2}{m} + \frac{SD(diff^{MLR})^2}{m}}} \tag{22}$$

Table 2 – Testing of the proposed models

m	X_1	X_2	X_3	X_4	s^{SIM}	s^{HCM}	s^{MLR}	s^{ANN}	$diff^{HCM}$	$diff^{MLR}$	$diff^{ANN}$
1	10	342	332	12	1,729	1,422	1,570	1,650	307	159	79
2	35	250	363	10	1,359	1,068	1,401	1,350	291	42	9
3	31	82	223	8	1,709	1,642	1,698	1,724	67	11	15
4	37	60	226	9	1,695	1,546	1,649	1,690	149	46	5
5	32	168	204	8	1,624	1,694	1,611	1,623	70	13	1
6	40	191	411	12	1,384	913	1,369	1,361	471	15	23
7	25	87	353	15	1,652	1,168	1,637	1,673	484	15	21
8	19	123	85	5	1,858	1,788	1,875	1,835	70	17	23
9	46	59	301	7	1,574	1,214	1,532	1,586	360	42	12
10	45	330	97	6	1,375	1,659	1,385	1,347	284	10	28
11	20	400	281	8	1,482	1,497	1,463	1,500	15	19	18
12	20	399	500	8	1,418	914	1,350	1,404	504	68	14
13	48	131	425	15	1,327	822	1,317	1,300	505	10	27
14	28	354	81	13	1,467	1,598	1,496	1,496	131	29	29
15	46	181	407	9	1,316	904	1,340	1,330	412	24	14
16	30	273	173	7	1,520	1,703	1,550	1,533	183	30	13
17	25	301	385	10	1,446	1,104	1,442	1,423	342	4	23
18	19	200	377	12	1,631	1,182	1,595	1,634	449	36	3
19	40	159	146	13	1,599	1,628	1,533	1,553	29	66	46
20	12	277	235	7	1,750	1,746	1,700	1,747	4	50	3

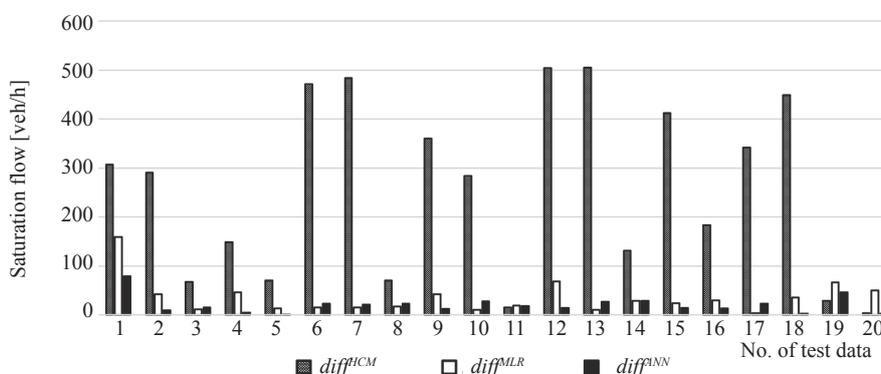


Figure 5 – Absolute difference between the evaluated values of the saturated flow and the values obtained by simulation

where:

$\overline{diff^{ANN}}$ – average value of the first sample;

$\overline{diff^{MLR}}$ – average value of the second sample;

$SD(diff^{ANN})$ – standard deviation of the first sample;

$SD(diff^{MLR})$ – standard deviation of the second sample;

m – size of the first and the second sample ($m = 20$).

By taking the appropriate data about the average value and the standard deviation from Table 2, parameter value: $t = -1.766$ is obtained. Testing is performed with the 5% risk ($t_{0.05} = 1.729$). Since $|t| > t_{0.05}$, it can be concluded that, in this case, the ANN method has obtained statistically better solutions than the MRL method.

In papers [18, 19], the MLR performs well in the saturated flow estimation, but the novelty in our paper is that we solve the complex problem of saturated flow of SLPLT. It is shown that the MLR, as a simpler method than ANN, obtains acceptable results in solving the subject problem.

5. CONCLUSION

This paper has presented a new approach for the evaluation of a shared lane with permitted left turn, based on simulation and artificial neural networks. The simulation has been used so that the values of the saturated flow could be obtained, depending on the factors of influence defined in advance. The same set of input/output pairs of data for the training of the artificial neural network have been used for obtaining the multiple regression models. Additionally, for the comparison of the results obtained on the test data, the known HCM 2010 approach was taken into consideration.

The error between the applied methods and the simulation approach was the measure of results quality. The ANN method obtained an error of 27 veh/h, the MLR method obtained an error of 49 veh/h, while the HCM 2010 method obtained an error of 311 veh/h.

The results have shown that the HCM 2010 method was not successful in forecasting the saturated flow, which was expected because the subject problem was extremely complex. The reasons for this lie in the combined stochastic influence of the opposing demands, the proportion of left turns and pedestrian demands. The artificial neural networks gave statistically significantly better results in comparison to the ones obtained by multiple linear regression, which was confirmed by the appropriate *t* statistics. Although we did not test our approach at some of the real intersections, the results show the possibilities in the practical application of the MLR and ANN models for the calculation of the saturated flows.

The suggested approach has shown its application on the test data which are independent of those used for training. It can be concluded that the artificial neural networks have proved to be useful tools for solving a complex problem such as the evaluation of the saturation flow of a shared lane with permitted left turns. The directions of the future research could include the application of the suggested approach on other traffic lanes: the lane with exclusive left turns, the shared lane with right turns, etc. Additionally, some other influential factors could be included in the suggested methodology, from those recommended in the HCM 2010 manual.

Dr **VELJKO RADIČEVIĆ**¹

E-mail: veljkoradi@gmail.com

Dr **NIKOLA KRSTANOSKI**²

E-mail: nikola.krstanoski@tfb.uklo.edu.mk

Dr **MARKO SUBOTIĆ**³

E-mail: marko.subotic@sf.ues.rs.ba

¹ Visoka tehnička škola strukovnih studija Uroševac (Leposavić), 24. Novembra bb, 38218, Leposavić, Srbija

² Univerzitet "St. Kliment Ohridski", Tehnički fakultet Makedonska falanga 37, 7000 Bitola, Sjeverna Makedonija

³ Univerzitet u Istočnom Sarajevu, Saobraćajni fakultet V. Mišića 52, 74000 Doboj, Bosna i Hercegovina

NOV PRISTUP ZA PROCENU VREDNOSTI ZASIĆENOG TOKA ZAJEDNIČKE SAOBRAĆAJNE TRAKE SA DOZVOLJENIM LEVIM SKRETANJIMA

ABSTRAKT

Procena vrednosti zasićenog toka saobraćajnih traka je od velikog značaja pri definisanju signalnog plana raskrsnice. Zbog brojnih uticajnih faktora, čije vrednosti nije uvek lako kvantifikovati, predmetni problem spada u grupu teških za rešavanje. Ovaj rad se bavi procenom vrednosti zasićenog toka zajedničke saobraćajne trake sa dozvoljenim levim skretanjima. Razvijen je algoritam baziran na veštačkim neuronskim mrežama, gde su podaci za obučavanje dobijeni pomoću simulacije. Rezultati dobijeni pomoću veštačkih neuronskih mreža poređeni su sa onima dobijenim višestrukoum regresijom i poznatom HCM 2010 metodom za određivanje zasićenog toka zajedničkih saobraćajnih traka. Numerički primer, razvijen u radu, pokazuje da je pristup zasnovan na veštačkim neuronskim mrežama postigao statistički bolje rezultate od onih generisanih pomoću višestruke regresije, sa greškom od 27 voz/h i 49 voz/h, respektivno. HCM 2010 pristup je značajno lošiji u odnosu na ostala dva koja su primenjena u ovom radu. Buduća istraživanja bi mogla da idu u pravcu uključivanja dodatnih faktora u predloženu metodologiju, kao što su nagib saobraćajne trake, blizina autobusog stajališta i drugih.

KLJUČNE REČI

veštačke neuronske mreže; višestruka regresija; dozvoljena leva skretanja; zajednička saobraćajna traka; simulacija;

REFERENCES

- [1] *Highway Capacity Manual*. Washington, DC: Transportation Research Board, National Research Council; 2010.
- [2] Branston D, Van Zuylen H. The estimation of saturation flow, effective green time and passenger car equivalents at traffic signals by multiple linear regression. *Transportation Research*. 1978;12(1): 47-53. Available from: doi:10.1016/00411647(78)90107 7 [Accessed 10th Jan 2020].
- [3] Kessaci A, Farges JL, Henry JJ. On line estimation of turning movements and saturation flows in PROLYN. *Proceedings of the IFAC/IFIP/IFORS Symposium on Control, Computers, Communications in Transportation, 19-21 September 1989, Paris, France*. Pergamon; 1989.

- p. 191-197. Available from: doi:10.1016/B978-0-08-037025-5.50034-7 [Accessed 10th Jan. 2020].
- [4] Lin F-B. Saturation flow and capacity of shared permissive left-turn lane. *Journal of Transportation Engineering*. 1992;118(5): 611-630. Available from: doi:10.1061/(ASCE)0733947X(1992)118:5(611) [Accessed 10th Jan. 2020].
- [5] Chang G-L, Chen C-Y, Perez, C. Hybrid model for estimating permitted left-turn saturation flow rate. *Transportation Research Record*. 1996;1566(1): 54-63. Available from: doi:10.1177/0361198196156600107 [Accessed 10th Jan. 2020].
- [6] Glanopoulos GA, Mustafa MAS. Saturation flow and Capacity of shared lanes: Comparative evaluation of estimation methods. *Transportation Research Record*. 1996;1555(1): 50-58. Available from: doi:10.1177/0361198196155500107 [Accessed 10th Jan. 2020].
- [7] Minh CC, Sano K. Analysis of motorcycle effects to saturation flow rate at signalized intersection in developing countries. *Journal of the Eastern Asia Society for Transportation Studies*. 2003;5: 1211-1222.
- [8] Bonneson J, Nevers B, Zegeer J, Nguyen T, Fong T. *Guidelines for quantifying the influence of Area Type and other factors on Saturation flow rate*. College Station, TX: Texas Transportation Institute; June 2005.
- [9] Khosla K, Williams JC. Saturation flow at signalized intersections during longer green time. *Transportation Research Record*. 2006;1978(1): 61-67. Available from: doi:10.1177/0361198106197800109 [Accessed 10th Jan. 2020].
- [10] Radhakrishnan P, Mathew T. Passenger car units and saturation flow models for highly heterogeneous traffic at urban signalised intersections. *Transportmetrica*. 2011;7(2): 141-162. Available from: doi: 10.1080/18128600903351001 [Accessed 10th Jan. 2020].
- [11] Chen P, Nakamura H, Asano M. Lane Utilization Analysis of Shared Left-turn Lane Based on Saturation Flow Rate Modeling. *Procedia-Social and Behavioral Sciences*. 2012;43: 178-191. Available from: doi:10.1016/j.sbspro.2012.04.090 [Accessed 10th Jan. 2020].
- [12] Chen P, Qi H, Sun J. Investigation of saturation flow on shared right-turn lane at signalized intersections. *Transportation Research Record*. 2014;2461(1): 66-75. Available from: doi:10.3141/2461-09 [Accessed 10th Jan. 2020].
- [13] Bagheri E, Mehran B, Hellinga B. Real-Time Estimation of Saturation Flow Rates for Dynamic Traffic Signal Control Using Connected-Vehicle Data. *Transportation Research Record*. 2015;2487(1): 69-77. Available from: doi:10.3141/2487-06 [Accessed 10th Jan. 2020].
- [14] Wang L, Wang Y, Bie Y. Automatic Estimation Method for Intersection Saturation Flow Rate Based on Video Detector Data. *Journal of Advanced Transportation*. 2018;2018: 1-9. Available from: doi:10.1155/2018/8353084 [Accessed 10th Jan. 2020].
- [15] Ma W, Liu Y, Zhao J, Wu N. Increasing the capacity of signalized intersections with left-turn waiting areas. *Transportation Research Part A: Policy and Practice*. 2017;105: 181-196. Available from: doi:10.1016/j.tra.2017.08.021 [Accessed 10th Jan. 2020].
- [16] Zhao J, Yu J, Zhou X. Saturation flow models of exit lanes for left-turn intersections. *Journal of Transportation Engineering Part A: Systems*. 2018;145(3): 04018090. Available from: doi:10.1061/JTEPBS.0000204 [Accessed 10th Jan. 2020].
- [17] Liu X, Lai L, Kong Y, Le Vine S. Protected turning movements of non-cooperative automated vehicles: Geometrics, trajectories, and saturation flow. *Journal of Advanced Transportation*. 2018;2018: 1-12. Available from: doi:10.1155/2018/1879518 [Accessed 10th Jan. 2020].
- [18] Bester CJ, Meyers WL. Saturation flow rates. *Proceedings of 26th Annual Southern African Transport Conference, 9-12 July 2007, Pretoria, South Africa*.
- [19] Minh C-C, Sano K. Analysis of motorcycle effects to saturation flow rate at signalized intersection in developing countries. *Journal of the Eastern Asia Society for Transportation Studies*. 2003;5: 1211-1222.
- [20] Dreoj J, Petrowski A, Siarry P, Taillard E. *Metaheuristics for hard optimization: Methods and case studies*. Springer Science and Business Media; Jan. 2006.
- [21] Birattari M, Kacprzyk J. *Tuning metaheuristics: A machine learning perspective*. Berlin: Springer; Apr. 2009.
- [22] Shi W-M, Shen Q, Kong W, Ye B-X. QSAR analysis of tyrosine kinase inhibitor using modified ant colony optimization and multiple linear regression. *European Journal of Medicinal Chemistry*. 2007;42(1): 81-86. Available from: doi:10.1016/j.ejmech.2006.08.001 [Accessed 10th Jan. 2020].
- [23] Yuan M, Ekici A, Lu Z, Monteiro R. Dimension reduction and coefficient estimation in multivariate linear regression. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*. 2007;69(3): 329-346. Available from: doi:10.1111/j.1467-9868.2007.00591.x [Accessed 10th Jan. 2020].
- [24] Lu Z, Monteiro RD, Yuan M. Convex optimization methods for dimension reduction and coefficient estimation in multivariate linear regression. *Mathematical Programming*. 2012;131(1-2): 163-194. Available from: doi:10.1007/s10107-010-0350-1 [Accessed 10th Jan. 2020].
- [25] Luk K-C, Ball JE, Sharma A. An application of artificial neural networks for rainfall forecasting. *Mathematical and Computer Modelling*. 2001;33(6-7): 683-693. Available from: doi:10.1016/S0895-7177(00)00272-7 [Accessed 10th Jan. 2020].
- [26] Rumelhart DE, Hinton GE, Williams RJ. *Learning internal representations by error propagation*. Technical Report, California Univ San Diego La Jolla Inst for Cognitive Science, 1985.
- [27] Da Silva IN, Spatti DH, Flauzino RA, Bartocci Liboni LH, dos Reis Alves SF. *Artificial neural networks*. Cham: Springer International Publishing; 2017.

Appendix

Training pairs (50 of 100 pairs)

No.	Input				Output	No.	Input				Output
	X_1	X_2	X_3	X_4	s^{SIM}		X_1	X_2	X_3	X_4	s^{SIM}
1	34	173	156	10	1,583	26	18	215	374	13	1,619
2	16	328	473	10	1,560	27	18	183	384	14	1,646
3	33	311	493	13	1,217	28	33	297	204	8	1,464
4	38	227	269	14	1,448	29	11	203	430	7	1,780
5	41	63	241	5	1,708	30	24	286	144	7	1,598
6	41	231	167	5	1,519	31	50	277	447	6	1,152
7	44	64	360	14	1,500	32	12	203	437	10	1,744
8	35	362	320	5	1,309	33	16	50	79	15	1,761
9	39	291	88	11	1,455	34	37	139	228	12	1,568
10	20	400	232	12	1,483	35	32	290	206	15	1,434
11	19	310	337	6	1,597	36	42	81	282	11	1,572
12	15	179	58	13	1,781	37	44	213	420	9	1,303
13	16	334	183	13	1,656	38	10	213	156	8	1,829
14	22	216	346	10	1,570	39	12	64	306	10	1,808
15	30	278	156	13	1,505	40	36	54	126	8	1,801
16	48	266	429	9	1,183	41	19	339	343	6	1,575
17	31	389	424	6	1,225	42	14	197	237	5	1,820
18	27	292	116	10	1,556	43	41	296	315	11	1,280
19	14	178	458	9	1,709	44	28	398	210	5	1,423
20	30	321	261	10	1,446	45	48	183	114	10	1,513
21	49	241	305	8	1,323	46	48	164	68	15	1,536
22	32	274	431	12	1,122	47	35	352	66	5	1,478
23	14	51	482	10	1,779	48	38	182	491	12	1,317
24	35	336	460	7	1,218	49	28	84	308	15	1,626
25	22	140	215	6	1,792	50	47	223	53	7	1,507