

Integrating ANN Prediction with Honeybee Optimisation for Flyrock Minimisation in Open-Pit Mining

Rudarsko-geološko-naftni zbornik
(The Mining-Geology-Petroleum Engineering Bulletin)
DOI: 10.17794/rgn.2025.5.11

Original scientific paper



Mojtaba Rezakhah¹ , Erfan Nemati¹ , Amir Batarbiat¹ , Manoj Khandelwal^{2*} 

¹ Department of Mining Engineering, Faculty of Engineering, Tarbiat Modares University, Tehran, Iran.

² Institute of Innovation, Science and Sustainability, Federation University Australia, Ballarat, VIC.

Abstract

Flyrock is an undesirable phenomenon resulting from blasting in open-pit mines, posing significant risks to both environmental and human safety. Given these risks, a comprehensive study of flyrock is essential to mitigate its adverse effects. This study presents a novel hybrid intelligent model designed to predict and minimize flyrock distance by integrating an Artificial Neural Network (ANN) with a Honeybee Optimization Algorithm. Utilizing a dataset of 334 blast records collected from the Sungun copper mine, various ANN models were developed and evaluated. After assessing multiple models through a formal scoring system, the most effective one was selected for optimization. The chosen ANN model demonstrated strong predictive performance, achieving coefficients of determination (R^2) of 0.8930 and 0.8874, as well as root mean square error (RMSE) values of 0.2486 and 0.2512 for the training and testing phases, respectively, outperforming conventional empirical models. To further refine the blast pattern for safety, the Honeybee Optimization Algorithm was employed to minimize the predicted flyrock distance. The optimal flyrock distance was determined to be 7.25 meters, reflecting a 27.5% reduction compared to the lowest observed value in the collected data. This demonstrates the superiority of the proposed hybrid approach in enhancing blasting safety and efficiency.

Keywords:

Flyrock prediction, Optimisation algorithm, Blasting pattern, Honeybee algorithm, Metaheuristic algorithms

1. Introduction

Optimising mining operations from blast pattern design to fragmentation prediction and equipment performance enhancement is crucial for increasing productivity, reducing operational costs, and minimising environmental impacts. Recent research demonstrates that integrating mathematical modelling with artificial intelligence (AI) techniques, such as neural networks and metaheuristic algorithms, significantly improves the accuracy and effectiveness of mining process predictions and control strategies (Khajevand et al., 2025; Mirzeshi Kalateh Kazemi et al., 2023; Mirzeshi et al., 2023; Monjezi et al., 2007; Moreno et al., 2015; Rezakhah & Moreno, 2019).

Blasting is a fundamental operation in mining, critical for rock fragmentation and material handling. However, only about 15–20% of the explosive energy contributes to effective fragmentation and displacement. The remaining energy is often wasted due to various factors, leading to undesirable outcomes such as flyrock (Raina,

2023). Flyrock presents serious safety hazards, can damage equipment, escalate operational costs, and ultimately lower overall productivity. Its occurrence is influenced by both uncontrollable factors (e.g. rock strength) and controllable factors (e.g. explosive energy, blast design). A mismatch between these variables can result in hazardous flyrock incidents.

Several studies have sought to understand and predict flyrock behaviour. For example, Adhikari et al. (1999) investigated the influence of blast design parameters on flyrock and offered strategies for mitigating its risks. Artificial neural networks (ANNs) have been shown to effectively forecast flyrock distance and fragmentation (Monjezi et al., 2010), while a Mamdani fuzzy inference system demonstrated superiority over traditional statistical models in predicting flyrock distances (Rezaei et al., 2011).

Recent studies show that combining optimization techniques with machine-learning algorithms significantly improves flyrock distance prediction accuracy. The ACWNNsR model, integrating ANN, fuzzy cognitive maps, and Z-number theory, demonstrated strong predictive capability (Hosseini et al., 2022). Embedding particle swarm optimization and jellyfish search into ANN training highlighted charge weight, powder factor, and hole angle as key inputs (Wang et al., 2023). The

* Corresponding author: Manoj Khandelwal
e-mail address: m.khandelwal@federation.edu.au

Received: 15 May 2025. Accepted: 17 July 2025.

Available online: 21 October 2025

LSSVM-WOA hybrid ensured robust and stable forecasts (Ding et al., 2023). ANFIS models coupled with variable selection procedures identified burden as the most critical parameter (Hudaverdi, 2022). Among tree-based learners, AdaBoost delivered the best performance and singled out powder factor as the dominant influence (Yari, et al., 2023). The equilibrium-optimizer-extreme learning machine (EO-ELM) approach also pinpointed the most sensitive variables (Bhatawdekar, et al., 2023). Finally, the Harris Hawks optimization-enhanced multi-layer perceptron (HHO-MLP) achieved the highest overall modeling accuracy (Murlidhar, et al., 2021).

Similarly, an empirical equation for flyrock prediction was proposed based on dimensional analysis and validated using Monte Carlo simulations, confirming its reliability in modelling blast parameter variability (Ghassemi et al., 2012). More recent research has also shown that incorporating geomechanical factors, such as elastic wave velocity, into blast fragmentation models can enhance prediction accuracy and support better blast designs in open-pit mining (Tajik et al., 2023).

In related work, a hybrid approach was applied, combining the artificial bee colony (ABC) algorithm with ANN to optimise the safety factor in retaining walls, demonstrating the robustness and precision of such hybrid methods (Noroozi Ghaleini, et al., 2019). Building on this foundation, the present study employs neural networks to predict flyrock based on various blast pattern configurations. A scoring system was developed to as-

sess multiple models and identify the best-performing one. Subsequently, the bee colony optimisation algorithm was applied to determine the optimal blast pattern parameters to effectively reduce flyrock and improve blasting efficiency. This research, therefore, aims to optimise and control flyrock using neural networks and metaheuristic algorithms and compares these AI-driven models with conventional flyrock prediction approaches to evaluate their practical viability and performance.

Flyrock is the leading safety risk in open-pit blasting, yet most AI models merely predict throw distance without offering design corrections and rely on small, unvalidated datasets. This study fills that gap with the first closed-loop ANN + Honey-Bee Optimizer: a high-accuracy neural network models flyrock behaviour, while the optimizer adjusts charge, spacing and angle until the predicted distance meets legal limits. Validation on 334 real blasts from the Sungun copper mine confirms both higher accuracy and direct, actionable control, delivering a practical tool for reducing flyrock in day-to-day operations.

2. Field Investigation and Data Collection

To develop a predictive and optimization model for blast parameters aimed at minimizing flyrock, a total of 334 new datasets were collected from the Sungun copper mine, located in northwest Iran, approximately 35 km from Varzaghan in East Azerbaijan province. This mine is characterised by a hydrothermal ore deposit with mineralisation associated with the Cenozoic Sahand-Bazman orogenic belt, hosted within altered quartz-monzonite rocks. The primary ore minerals include chalcopyrite, pyrite, chalcocite, cuprite, and malachite, with copper being the principal extracted resource. Additionally, the deposit contains economically significant amounts of gold, silver, and molybdenite. **Figure 1** illustrates the operational area of the Sungun copper mine.

Each dataset comprises key blasting parameters, including stemming, burden and spacing, blast hole diameter, blast hole length, sub-drilling length, specific charge, and flyrock distance. A descriptive statistical analysis was conducted on the collected datasets, with the results summarised in **Table 1**.



Figure 1. Drilling and Blasting Area in Sungun Copper Mine

Table 1. Statistical Characteristics of the Data Used in the Network

Parameter	Minimum	Maximum	Mean	Standard Deviation	Data Type
Blast Hole Diameter (in)	3	6	5	0.79	Input
Blast Hole Length (m)	3	12.5	10.81	6.98	Input
Spacing (m)	2	6.5	4.76	0.87	Input
Burden (m)	2	5	3.96	0.68	Input
Stemming Length (m)	1.8	4.5	3.78	0.67	Input
Specific Charge (kg/m ³)	0.1	1	0.42	0.12	Input
Sub-drilling Depth (m)	0	5.4	0.27	0.55	Input
Flyrock Distance (m)	10	100	67	21.5	Output

The selected input variables include both fundamental blast design parameters and a derived parameter known as Specific Charge. Although Specific Charge is mathematically related to other inputs, its inclusion as a distinct variable is justified because it represents the overall concentration of explosive energy a critical factor in flyrock generation that geometric parameters alone do not fully capture. It is important to note that while uncontrollable geological factors can also contribute to flyrock, this study focuses on optimizing the controllable design parameters to minimize risk. The minimum recorded flyrock distance of 10 meters, although relatively short, was classified as a flyrock event according to site-specific safety protocols, as it landed beyond the designated safety perimeter, thereby necessitating its inclusion in the dataset.

3. Artificial Neural Network

Artificial neural networks (ANNs) are designed to mimic the structure and functionality of the human brain. Essentially, an ANN consists of interconnected neurons arranged in multiple layers, where each neuron acts as a simple processing unit that transmits information to others within the network. A large collection of these neurons forms a neural network. One of the most widely used learning algorithms in perceptron neural networks is the feedforward learning algorithm (**Laguna & Martí, 2002**), which operates based on the error correction learning law, a generalisation of the least-means algorithm.

Feedforward neural networks consist of three main layers: an input layer, a hidden (middle) layer, and an output layer. While the number of hidden layers is not restricted, a single hidden layer is often sufficient for solving complex nonlinear problems. The feedforward learning process is divided into two stages: the feedforward stage and the backward (error correction) stage. In the feedforward stage, inputs are passed sequentially through each layer, ultimately producing an output as the responses of the network. During the forward phase, synaptic weights are initialised. In the backward phase, these weights are adjusted based on error correction rules. The difference between the predicted response of the network and the desired (expected) response, known as the error signal, is propagated backward through the network, refining the synaptic weights to improve prediction accuracy.

To evaluate the network's performance, the coefficient of determination (R^2) and root mean square error (RMSE) were used to measure the correlation between predicted and actual flyrocks. In this study, the neural network was implemented using the Lüneburg-Marquette learning algorithm, one of the most widely used optimisation techniques in ANN training. Based on prior research, the network structure was selected with three layers, an input layer with 7 input variables, a hidden

layer and an output layer with a single output. A single hidden layer is sufficient to approximate any nonlinear function. Various studies have explored optimal methods for determining the number of neurons in the hidden layer, offering mathematical approaches to avoid the trial-and-error method. **Equations 1 to 6** outline the established methodologies for selecting the appropriate number of hidden neurons (**Hecht-Nielsen, 1987; Hornik et al., 1989; Masters, 1993; Paola, 1994; Ripley, 1993; Wang, 1994**).

$$H \leq 2N_i + 1 \quad (1)$$

$$H = \frac{N_i + N_o}{2} \quad (2)$$

$$H = \frac{2 + N_o \times N_i + 0.5N_o \times (N_o^2 + N_i)}{N_i + N_o} - 3 \quad (3)$$

$$H = \frac{2N_i}{3} \quad (4)$$

$$H = \sqrt{N_i \times N_o} \quad (5)$$

$$H = 2N_i \quad (6)$$

In this study, the neural network was implemented using the Levenberg-Marquardt learning algorithm. This algorithm was chosen due to its high efficiency and fast convergence rates for training small to medium-sized feedforward neural networks, making it well-suited for the dataset size in this research (Ampazis & Perantonis, 2000).

In this study, N_i represents the number of inputs, while N_o denotes the number of outputs in the model. Based on recommended parameter values, the Levenberg-Marquardt learning algorithm was implemented using a neural network with a hidden layer containing 2 to 15 neurons. To determine the most effective model, the coefficient of determination (R^2) and root mean square error (RMSE) were evaluated for both the training and testing phases. A comparative analysis was conducted by assigning scores to each model configuration. The scoring process involved awarding the highest score to models with the largest R^2 values, while lower scores were assigned as R^2 decreased. Conversely, models with the lowest RMSE values received the highest scores, with scores decreasing as RMSE increased. At the end of the evaluation, the scores for each model configuration were summed to determine the overall performance ranking (Kaastra & Boyd, 1996).

The scoring process involved four criteria: R^2 for training, RMSE for training, R^2 for testing, and RMSE for testing. For each criterion, the 14 models were ranked from best (rank 14) to worst (rank 1). For R^2 , a higher value received a higher rank, while for RMSE, a lower value received a higher rank. The final score for each

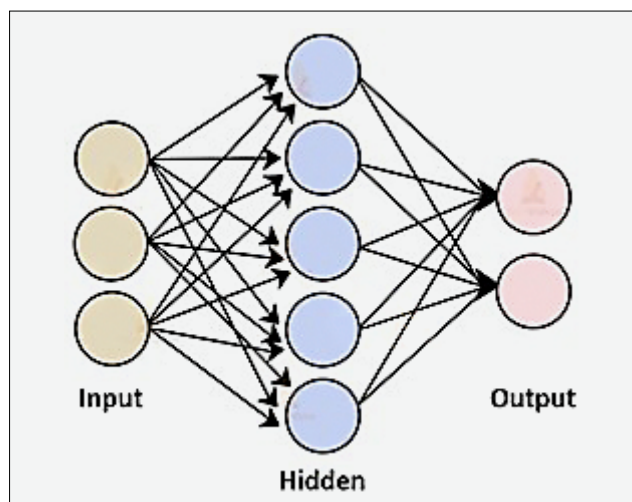


Figure 2. Schematic of a Basic Artificial Neural Network (ANN) with Input, Hidden, and Output Layers

model was the sum of its four ranks, allowing for a balanced assessment of both accuracy and generalisation ability.

Figure 2 presents a schematic diagram of how the neural network works.

4. Honeybee Optimisation Algorithm

The Honeybee Optimisation Algorithm is inspired by the collective behaviour of bee colonies, where individ-

ual bees, though simple on their own, work together to form a highly organised and efficient system for discovering and exploiting nectar resources. Within a colony, bees are divided into three main groups, each assigned a specific task in foraging.

The first group consists of scout bees, responsible for exploring the environment and new food resources. Once a scout bee finds a suitable resource, it returns to the hive and communicates its location through a movement known as the circular dance. The second group, the worker bees, focuses on exploiting these discovered food resources, ensuring efficient nectar collection. The third group, the onlooker bees, remains in the hive, observing the circular dance of the scout bees. Based on the quality of the reported resources, onlooker bees select the most promising sites for further extraction. The Honeybee Optimisation Algorithm was first introduced by Karaboga in 2005 (**Karaboga, 2005**). Since then, extensive research has been conducted on bee behaviour in nature, leading to the development of optimisation algorithms inspired by their social structure. While this algorithm has been applied in various fields, one of its notable implementations in mining is the prediction and optimisation of the backbreak caused by blasting operations (**Ebrahimi et al., 2016; Kanellopoulos & Wilkinson, 1997; Rezaei et al., 2011; Sayadi et al., 2013; Zorlu et al., 2008**). The algorithm follows a structured process consisting of four key stages. As illustrated in **Figure 3**, the workflow of the Bee Algorithm is structured into

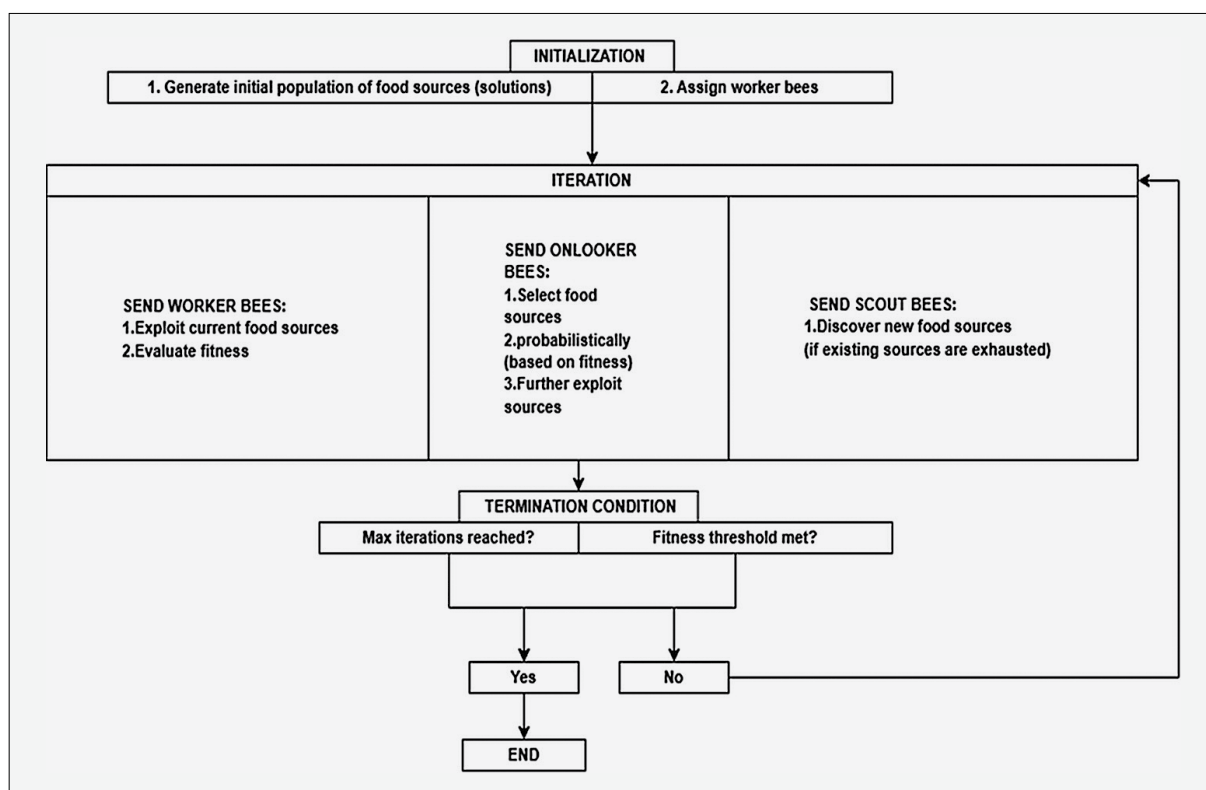


Figure 3. Flowchart of the Bee Algorithm illustrating its three primary phases: Initialisation, Iteration, and Termination Condition evaluation.

three core phases: Initialization, Iteration, and Termination Condition Evaluation, ensuring a systematic optimisation process. The main steps of the Bee Algorithm are outlined in **Karaboga & Basturk (2007)**:

Step 1: In the initial phase of the algorithm, the bee population is equally divided into worker bees and non-worker bees. Each food source is assigned a single worker bee, which means the number of worker bees corresponds directly to the number of food sources around the hive. Consequently, within the defined solution space, the initial solution is generated based on the number of food sources. Once these initial solutions are established, their respective values are compared using problem-specific evaluation functions.

Step 2: In this step, for each of the answers to the problem, a new answer is created using the relationship:

$$v_{i,j} = x_{i,j} + \varphi_{i,j}(x_{i,j} - x_{k,j}) \quad (7)$$

$$i \in \{1.2...BN\}$$

$$j \in \{1.2...D\}$$

$$k \in \{1.2...BN\} \wedge k \neq i$$

$$\varphi \in [-1.1]$$

Where $x_{i,j}$ is the j^{th} parameter of the i^{th} solution of the problem, $v_{i,j}$ is the j^{th} parameter of the new solution, i is a number from one to the number of solutions to the problem, φ is a random number in the range of -1 to 1, k is a random number from one to the number of solutions to the problem, BN is the number of initial solutions to the problem, and D is the number of optimization parameters.

After creating a new solution, if the value of this solution is greater than the value of the previous solution, it will be replaced; otherwise, this solution will be forgotten.

Step 3: In this step, the probability of receiving a bee from each source is calculated using the following formula:

$$p_i = \frac{fit_i}{\sum_{n=1}^{SN} fit_n} \quad (8)$$

Where fit_i is the fitness of source i (varies depending on the type and size of the problem and must be determined by the user) and p_i is the probability of selecting source i by observer bees. According to the fitness, a number of bees are assigned to each source. After calculating the value of each source using **Equation 7**, a new answer is created for the selected answers. If this answer has a higher value than the previous answer, this answer replaces the previous answer, and otherwise, a penalty is imposed. The purpose of the penalty is to create a counter for the number of non-improvement answers, and if the answer does not improve, one unit is added to its value.

Step 4: In this step, if the counter of the number of non-improvement answers reaches a predetermined limit ($C_{\max}$), this answer will be replaced with a random answer. Also, in this step, the conditions for the end of the iterations are checked. If the termination conditions of the algorithm are met, the iterations will end, otherwise, it will return to step two.

The implementation of the Honeybee algorithm in this study involved setting several key parameters to ensure robust optimisation. The algorithm was run with a population size of 50 bees for 100 iterations. The fitness function was defined as the inverse of the flyrock distance predicted by the optimised ANN model, aiming to minimise this output. The termination condition was set to the maximum number of iterations. The search space for each blast parameter was constrained within the observed minimum and maximum values from the collected dataset presented in **Table 1**.

5. Conventional Predictor

Conventional empirical methods are used as a basis for predicting flyrock distance in surface blasting operations. These models are developed based on field data and simplified mathematical relationships, each considering specific parameters. Some of the most important conventional models are:

5.1. Lundborg et al. Equation (1981)

This model provides the following relationship based on the diameter of the blast hole (d) and specific charge (q):

$$l_{\max} = 143d(q - 0.2) \quad (9)$$

Where:

$l_{\max}$ = Maximum throw (m),

d = Hole diameter (inch),

q = Specific charge (kg/m^3).

6. Results and Discussion

6.1 Prediction by ANN

The artificial neural network (ANN) model demonstrated robust predictive performance for flyrock distance. A total of 14 neural network configurations were evaluated, varying the number of neurons in the hidden layer (2 to 15). The best-performing model (Model 7) achieved a coefficient of determination (R^2) of 0.8930 and 0.8874 for the training and testing phases, respectively, with root mean square error (RMSE) values of 0.2486 and 0.2512. These results highlight the model's ability to generalise well to unseen data, indicating strong nonlinear approximation capabilities. The selected ANN structure consisted of 7 input parameters (blast hole diameter, length, spacing, burden, stemming, specific

Table 2. Predicted Values for Flyrock

No. Model	No. Neuron	Train		Test		Train		Test		Total Score
		R ²	RMSE	R ²	RMSE	rank R ²	rank RMSE	rank R ²	rank RMSE	
1	2	0.8082	0.3399	0.7726	0.3391	1	1	2	4	8
2	3	0.8354	0.3035	0.7957	0.3302	3	3	5	5	16
3	4	0.8299	0.3058	0.8154	0.3122	2	2	6	6	16
4	5	0.8593	0.2784	0.8612	0.2532	4	4	8	12	28
5	6	0.8761	0.2676	0.8742	0.2638	10	10	10	10	40
6	7	0.8742	0.2689	0.8705	0.2728	9	9	9	8	26
7	8	0.8930	0.2486	0.8874	0.2512	14	13	13	14	54
8	9	0.8780	0.2655	0.8742	0.2668	11	11	10	9	41
9	10	0.8668	0.2782	0.8949	0.2530	6	5	14	13	38
10	11	0.8686	0.2726	0.8761	0.2536	7	8	12	11	38
11	12	0.8892	0.2486	0.7832	0.3633	13	13	4	3	33
12	13	0.8686	0.2729	0.8354	0.3068	7	7	7	7	28
13	14	0.8780	0.2648	0.7140	0.4025	11	12	1	1	25
14	15	0.8630	0.2757	0.7762	0.3755	5	6	3	2	16

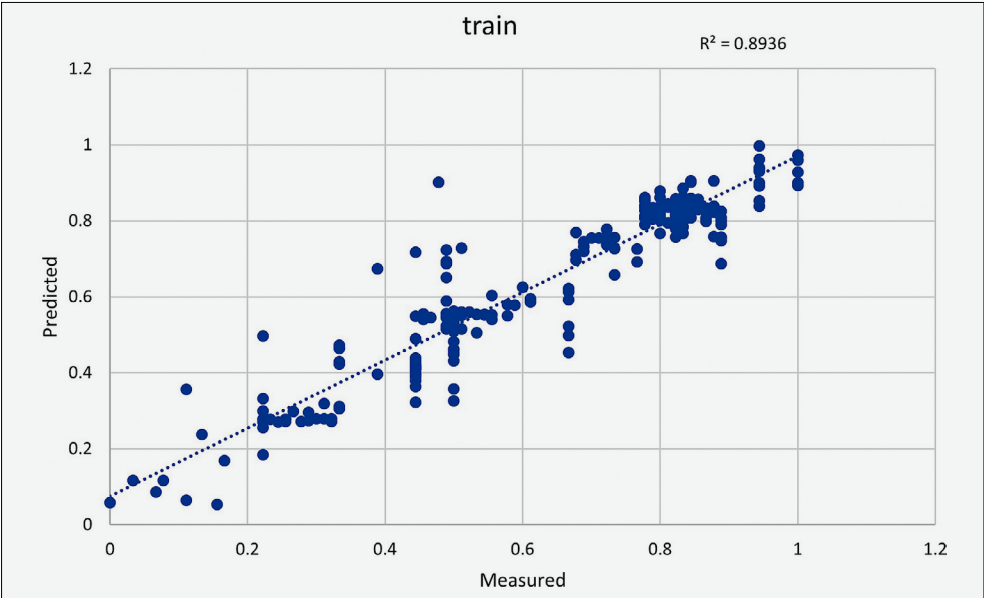


Figure 4. Predicted values of Flyrocks for training Model No. 7

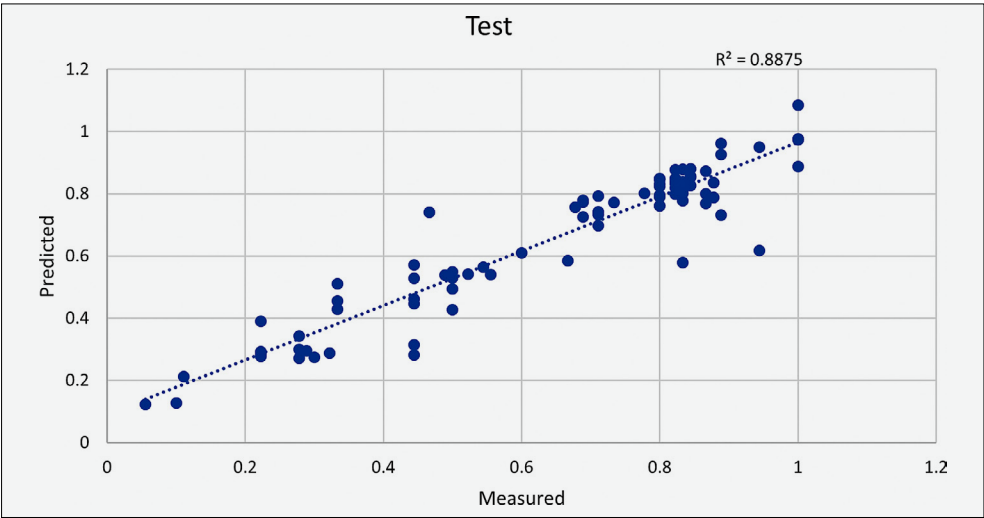


Figure 5. Predicted values of Flyrocks for testing Model No. 7

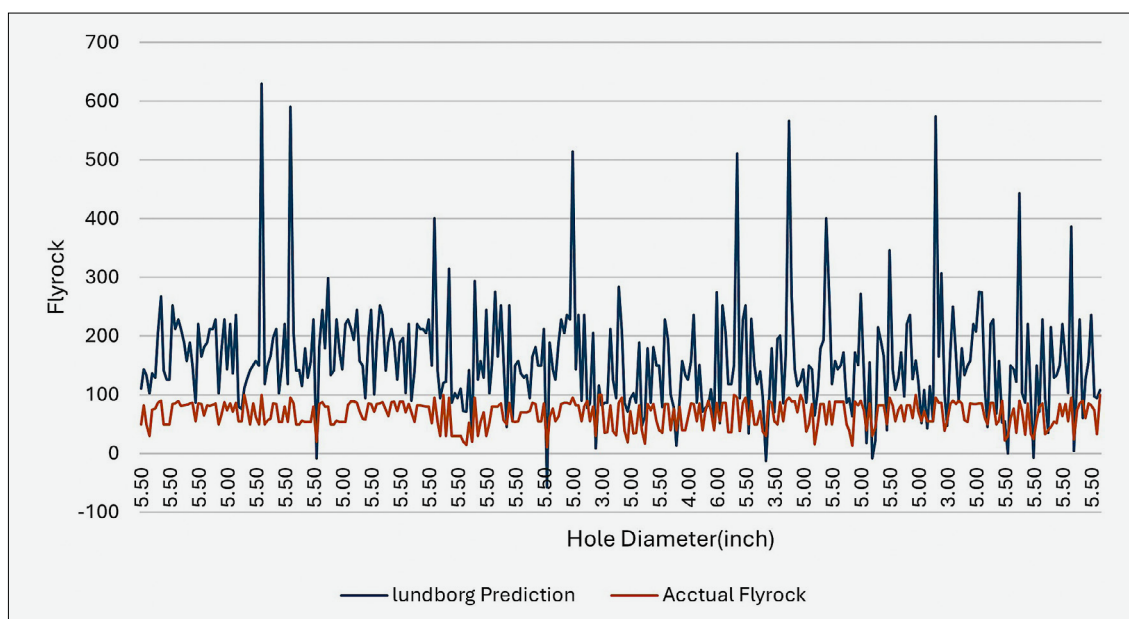


Figure 6. Comparison graph between the Lundborg method and actual flyrock

charge, and sub-drilling depth), a single hidden layer with 8 neurons, and one output (flyrock distance). Sensitivity analysis revealed that burden (B) and stemming length were the most influential parameters, contributing to 70.8% of the variance in flyrock predictions. **Table 2** shows the results of this neural network analysis.

6.2. Prediction by Conventional Predictor

The evaluation of traditional flyrock prediction methods, by **Lundborg (1981)**, revealed significant limitations in their accuracy. For the Lundborg model, the root mean square error (RMSE) was calculated as 121.1 meters, with a coefficient of determination (R^2) of 0.52. This indicates that the model explains only 52% of the variance in flyrock distances and suffers from oversimplification, as it ignores critical parameters like rock strength and explosive energy. For example, in sample predictions, the model estimated a flyrock distance of 110.1 meters for an actual value of 50 meters, highlighting its unreliability. **Figure 6** presents a comparative analysis of the Lundborg method versus actual flyrock measurements.

6.3. Flyrock Minimization using the Honeybee Algorithm

As previously mentioned, the search process continues until the minimum flyrock value is identified. Multiple iterations of the Honeybee algorithm were executed using different population sizes of bees. **Figure 7** shows the execution of the algorithm in minimizing flyrock distance.

Based on the results, the minimized flyrock distance was determined to be 7.25 meters. As indicated in **Table 1**, the initial minimum flyrock distance was approxi-

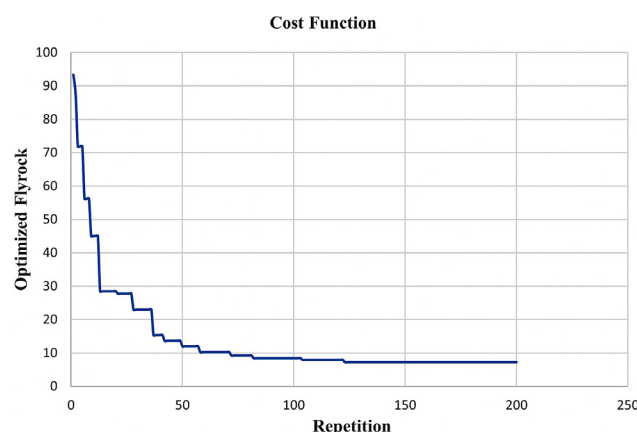


Figure 7. Minimization of the amount of Flyrocks throw in meters


mately 10 meters. By implementing the Honeybee optimisation algorithm, this value was reduced by 27.5%, demonstrating a significant improvement. Additionally, optimal values were obtained for key blasting parameters, including blast hole diameter and length, sub-drilling depth, burden, spacing, and stemming, as presented in **Table 3**.

6.4. Comparative Analysis

This paper compares flyrock prediction in mining blasting operations using two intelligent methods: Artificial Neural Networks (ANN) and Honeybee Optimization Algorithm, with traditional models. The ANN model demonstrated better performance compared to conventional models. Specifically, the ANN model achieved R^2 values of 0.8930 for training and 0.8874 for testing, indicating high predictive accuracy and effective simulation of flyrock behaviour. In contrast, the traditional

Table 3. Blasting pattern optimisation values

Parameter	Optimal Value
Diameter(in)	4
Holes length(m)	6
Sub-drilling (m)	0
Burden (m)	3
Spacing (m)	3.5
Stemming (m)	2

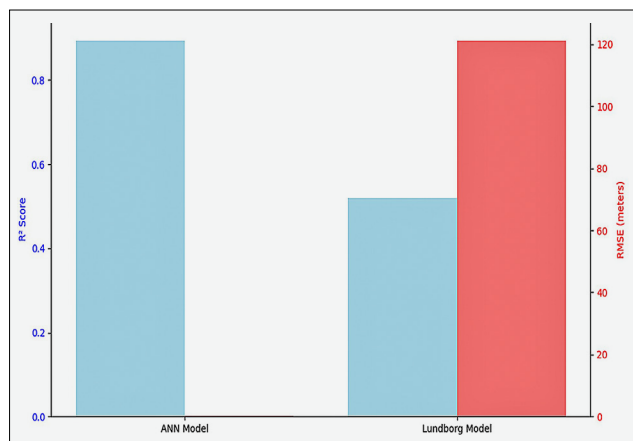**Figure 8.** Comparative Analysis of Flyrock Prediction Models

Lundborg model, based on simplified mathematical relationships, only explained 52% of the variance in flyrock distance and showed poor prediction performance.

Furthermore, a statistical t-test on the prediction errors confirmed that the lower RMSE of the ANN model


compared to the Lundborg model is statistically significant ($p < 0.05$), validating its superior performance.

Moreover, this model overlooks important parameters such as rock strength and explosive energy, which can lead to inaccurate results. The Honeybee Optimization Algorithm was then applied to optimize blast parameters and reduce flyrock. The algorithm optimized parameters like blast hole diameter, length, sub-drilling depth, spacing, and stemming length, reducing the flyrock distance from 10 meters to 7.25 meters, which represents a 27.5% improvement. This demonstrates that the Honeybee algorithm, using modern optimization methods, can significantly reduce flyrock distance. Sensitivity analysis in the study revealed that the burden parameter has the greatest impact on reducing flyrock, while stemming and specific charge have the most influence on increasing it.

Compared to traditional models, which rely on simplified empirical relationships, intelligent methods like ANN and Honeybee can provide more accurate predictions and more effective optimization of the blasting process in mines. These results show that intelligent techniques can significantly help in controlling flyrock and improving safety and productivity in mining operations.

7. Evaluating the Influence of Blasting Parameters on Flyrock

Several advanced analytical methods, namely, Pearson correlation analysis, multiple regression modelling, random forest regression, and permutation importance analysis, were applied to evaluate the impact of various blasting parameters on flyrock. The key findings from these analyses are as follows:

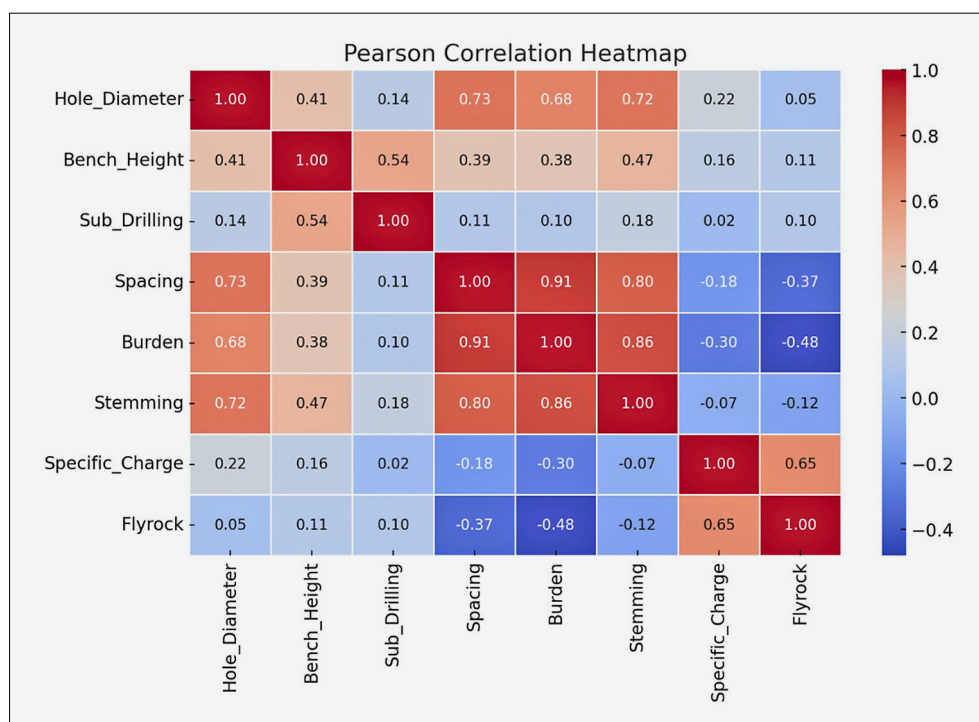**Figure 9.** Pearson Correlation Heatmap

7.1. Analysis with Pearson correlation

Figure 9 shows a heatmap illustrating the Pearson correlation between input parameters and flyrock distance. Among these parameters, burden (B) exhibits the most significant negative correlation with flyrock, indicating that an increase in burden leads to a considerable reduction in flyrock distance. Conversely, stemming length and specific charge show the strongest positive correlation, suggesting that an increase in these parameters results in a greater flyrock distance.

7.2. Multiple Regression Model

To quantify the contribution of each parameter, a multiple regression model was established (see **Figure 10**). The model achieved an R^2 value of 0.708, indicating that approximately 70.8% of the variations in flyrock can be explained by the selected variables. Among these parameters, burden exhibited the strongest negative correlation

with flyrock, meaning an increase in burden leads to reduced flyrock distance. Conversely, stemming length and specific charge demonstrated a significant positive correlation, indicating that higher values of these parameters contribute to increased flyrock distance.

7.3. Feature Importance Analysis (Random Forest Model)

To validate these results, a feature importance analysis was conducted using the Random Forest model (see **Figure 11**). The analysis confirmed that burden, stemming, and specific charge are indeed the most influential factors affecting flyrock behaviour. The results suggest that optimising Burden can significantly reduce excessive flyrock, while proper adjustments of stemming length and specific charge ensure a more controlled energy distribution.

Figure 10. Multiple Regression Analysis: Coefficients with Confidence Intervals

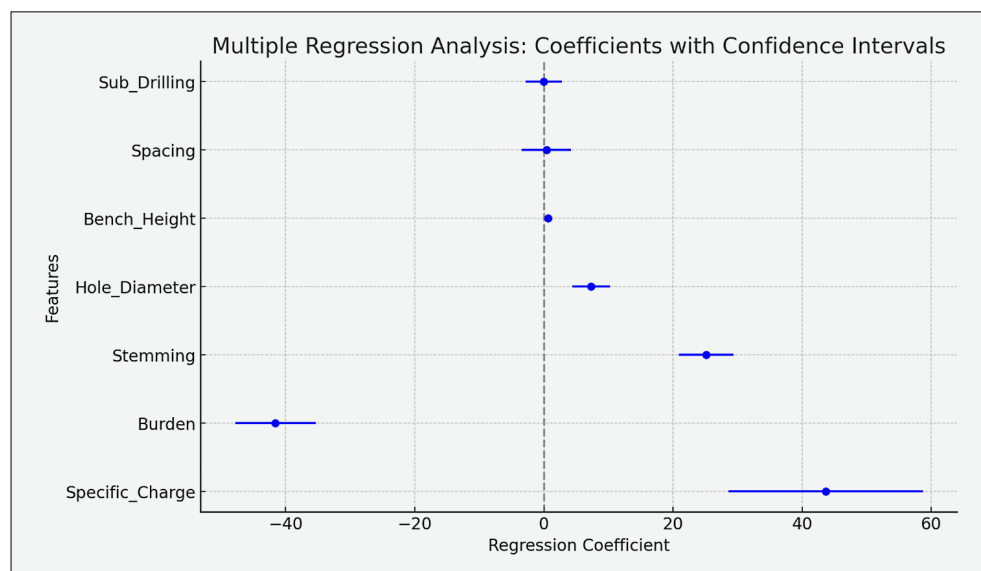
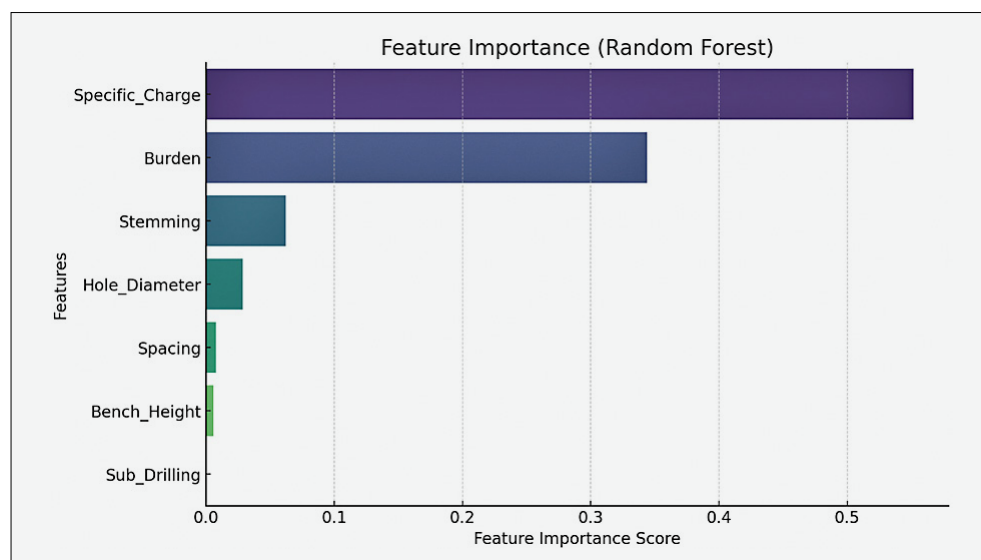


Figure 11. Feature Importance (Random Forest)



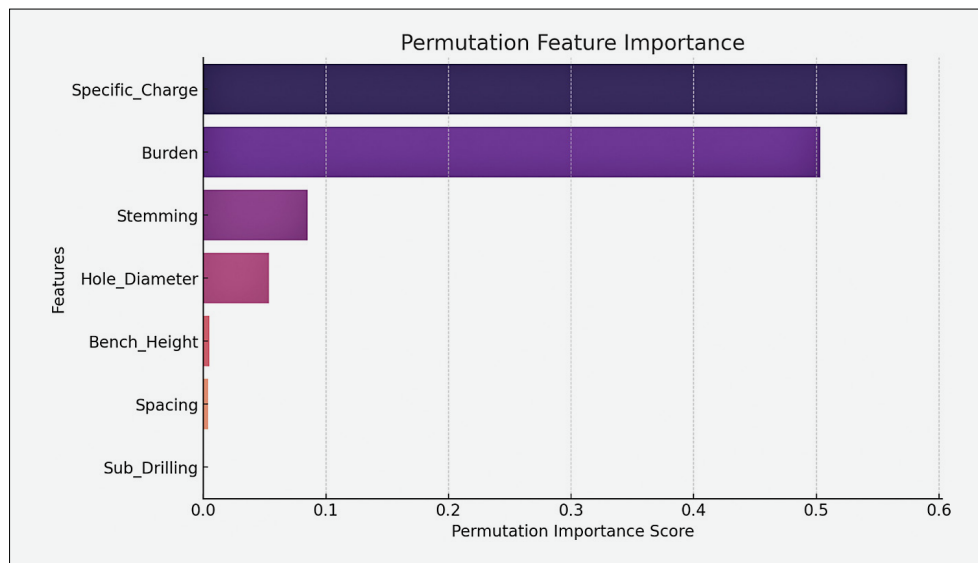


Figure 12. Permutation Feature Importance

Table 4. Consolidated Summary of Sensitivity Analysis Results

Feature	Pearson Correlation (Rank)	Regression Coeff. (Rank)	Random Forest Imp. (Rank)	Permutation Imp. (Rank)	Overall Influence
Specific Charge	1 (Positive)	1 (Positive)	1	1	Very High
Burden	2 (Negative)	2 (Negative)	2	2	Very High
Stemming	3 (Positive)	3 (Positive)	3	3	High
Hole Diameter	4	4	4	4	Medium
Spacing	5	5	5	6	Low
Bench Height	6	6	6	5	Low
Sub-drilling	7	7	7	7	Very Low

7.4. Permutation Importance Analysis

In order to improve the sensitivity analysis, a permutation importance method was used (see **Figure 12**). Such a method systematically changes each variable with its value to see its significance on flyrock prediction. The findings are consistent with burden as the most impactful variable in reducing flyrock, with stemming and specific charge causing the distance of flyrock, respectively.

The results of the various sensitivity analyses consistently show that burden, stemming, and specific charge are the three most crucial parameters influencing flyrock. However, although burden as a major factor helps fight the rock throw, stemming and specific charge increase flyrock and therefore require key optimisation.

These results have been statistically confirmed using a multiple regression model and correlation analysis, while Random Forest and Permutation Importance validated this systematic and well-established finding as machine-learning-based. The congruence of these methods further validates the results and allows for confirmation that changes to burden, stemming, and specific charge in the blast design can greatly enhance flyrock control.

To consolidate the findings from the different analytical techniques, **Table 4** provides a summary of the pa-

rameter importance rankings. The consistency across all four methods strongly validates the identification of burden, stemming, and specific charge as the most critical parameters governing flyrock.

8. Conclusions

This study successfully demonstrated the development and application of a hybrid intelligent system, combining an Artificial Neural Network (ANN) with a Honeybee Optimisation Algorithm, for the prediction and minimisation of flyrock in surface mining. The key novelty of this research lies in its integrated approach, moving beyond simple prediction to provide optimised, actionable blast design parameters for enhanced safety.

The developed ANN model, selected through a systematic scoring method, showed excellent predictive capabilities with high R^2 values (0.8930 for training, 0.8874 for testing) and low RMSE values, significantly outperforming traditional empirical methods. A comprehensive sensitivity analysis consistently identified burden, stemming, and specific charge as the most influential parameters affecting flyrock distance. The practical implication of this work is significant. By applying the Honeybee algorithm to the validated ANN model, blast

parameters were optimised to achieve a minimum fly-rock distance of 7.25 meters, representing a 27.5% reduction from the safest observed blasts in the field data. This result confirms that data-driven optimisation can lead to considerable improvements in operational safety and efficiency.

For future research, it is recommended to apply this hybrid model to other mine sites with different geological conditions to test its robustness. Furthermore, incorporating geomechanical variables (e.g. rock mass rating, joint properties) as inputs could further enhance the model's accuracy. Finally, the performance of the Honeybee algorithm could be benchmarked against other state-of-the-art metaheuristic algorithms to explore further potential for optimisation.

9. References

- Adhikari, G. R. (1999). Studies on Flyrock at Limestone Quarries. *Rock Mechanics and Rock Engineering*, 32, 291-301. doi:10.1007/s006030050049
- Ampazis, N., & Perantonis, S. (2000). Levenberg-Marquardt algorithm with adaptive momentum for the efficient training of feedforward networks. *Proceedings of the IEEE-INNS-ENNS International Joint Conference on Neural Networks. IJCNN 2000. Neural Computing: New Challenges and Perspectives for the New Millennium*, 1, 126-131. doi:10.1109/IJCNN.2000.857825
- Bhatawdekar, R., Kumar, R., Sabri Sabri, M., Roy, B., Mohamad, E., Kumar, D., & Kwon, S. (2023). Estimating Flyrock Distance Induced Due to Mine Blasting by Extreme Learning Machine Coupled with an Equilibrium Optimizer. *Sustainability*, 15, 3265. doi:10.3390/su15043265
- Ding, X., Jamei, M., Hasanipanah, M., Abdullah, R., & Le, B. (2023). Optimized Data-Driven Models for Prediction of Flyrock due to Blasting in Surface Mines. *Sustainability*, 15, 8424. doi:10.3390/su15108424
- Ebrahimi, E., Monjezi, M., Khalesi, M. R., & Armaghani, D. J. (2016). Prediction and optimization of back-break and rock fragmentation using an artificial neural network and a bee colony algorithm. *Bulletin of Engineering Geology and the Environment*, 75, 27-36. doi:10.1007/s10064-015-0720-2
- Ghasemi, E., Sari, M., & Ataie, M. (2012). Development of an empirical model for predicting the effects of controllable blasting parameters on flyrock distance in surface mines. *International Journal of Rock Mechanics and Mining Sciences*, 52, 163-170. doi:10.1016/j.ijrmms.2012.03.011
- Hecht-Nielsen, R. (1987). Kolmogorov's mapping neural network existence theorem. In *Proceedings of the international conference on Neural Networks* (pp. 11-14). New York: IEEE.
- Hornik, K., Stinchcombe, M., & White, H. (1989). Multilayer feedforward networks are universal approximators. *Neural Networks*, 2(5), 359-366. doi:10.1016/0893-6080(89)90020-8
- Hosseini, S., Poormirzaee, R., Hajihassani, M., & Kalatehjari, R. (2022). An ANN-Fuzzy Cognitive Map-Based Z-Number Theory to Predict Flyrock Induced by Blasting in Open-Pit Mines. *Rock Mechanics and Rock Engineering*, 55, 4373-4390. doi:10.1007/s00603-022-02866-z
- Hudaverdi, T. (2022). Prediction of flyrock throw distance in quarries by variable selection procedures and ANFIS modelling technique. *Environmental Earth Sciences*, 81, 281. doi:10.1007/s12665-022-10408-7
- Kaasra, I., & Boyd, M. (1996). Designing a neural network for forecasting financial and economic time series. *Neurocomputing*, 10(3), 215-236. doi:10.1016/0925-2312(95)00039-9
- Kanellopoulos, I., & Wilkinson, G. G. (1997). Strategies and best practice for neural network image classification. *International Journal of Remote Sensing*, 18(4), 711-725. doi:10.1080/014311697218719
- Karaboga, D. (2005). *An idea based on honey bee swarm for numerical optimization*.
- Karaboga, D., & Basturk, B. (2007). A powerful and efficient algorithm for numerical function optimization: artificial bee colony (ABC) algorithm. *Journal of Global Optimization*, 39, 459-471. doi:10.1007/s10898-007-9149-x
- Khajevand, S., Rezakhah, M., Monjezi, M., & Manríquez León, F. A. (2025, 5 1). Enhancing Transportation Fleet Efficiency in Open-Pit Mining via Simulation: a Case Study. *Journal of Mining and Environment*, 16(3), 997-1007. doi:10.22044/jme.2024.15094.2889
- Laguna, M., & Martí, R. (2002). Neural network prediction in a system for optimizing simulations. *IIE Transactions*, 34, 273-282. doi:10.1023/A:1012485416856
- Masters, T. (1993). *Practical neural network recipes in C++*. Morgan Kaufmann.
- Mirzahi Kalateh Kazemi, M., Nabavi, Z., Rezakhah, M., & Masoudi, A. (2023, 12 1). Application of XGB-based metaheuristic techniques for prediction time-to-failure of mining machinery. *Systems and Soft Computing*, 5, 200061. doi:10.1016/j.sasc.2023.200061
- Mirzahi, M., Rezakhah, M., Mousavi, A., & Nabavi, Z. (2023). New MIP model for short-term planning in open-pit mines considering loading machine performance: a case study in Iran. *International Journal of Mining and Mineral Engineering*, 341-364. doi:10.1504/IJMMME.2023.137375
- Monjezi, M., Bahrami, A., & Yazdian Varjani, A. (2010). Simultaneous prediction of fragmentation and flyrock in blasting operation using artificial neural networks. *International Journal of Rock Mechanics and Mining Sciences*, 47(3), 476-480. doi:10.1016/j.ijrmms.2009.09.008
- Monjezi, M., Goshtasbi, K., Rezakhah, M., & Singh, T. N. (2007). Design of stable slopes for Songun copper mine. *Mining Technology*, 116(3), 146-152. doi:10.1179/174328607X228901
- Moreno, E., Ferreira, F., Goycoolea, M., Espinoza, D., Newman, A., & Rezakhah, M. (2015). Linear programming approximations for modeling instant-mixing stockpiles. *Application of computers and operations research in the mineral industry-proceedings of the 37th international symposium, APCOM, 2009*, 582-587.
- Murlidhar, B. R., Nguyen, H., Rostami, J., X. Bui, A. J., Ragam, P., & Mohamad, E. T. (2021). Prediction of flyrock distance

- induced by mine blasting using a novel Harris Hawks optimization-based multi-layer perceptron neural network. *Journal of Rock Mechanics and Geotechnical Engineering*, 13(6), 1413-1427. doi:10.1016/j.jrmge.2021.08.005
- Noroozi Ghaleini, E., Koopialipoor, M., Momenzadeh, M., Sarafraz, M. E., Mohamad, E. T., & Gordan, B. (2019). A combination of artificial bee colony and neural network for approximating the safety factor of retaining walls. *Engineering with Computers*, 35, 647-658. doi:10.1007/s00366-018-0625-3
- Paola, J. (1994). *Neural network classification of multispectral imagery*. (Doctoral dissertation, MSc thesis, The University of Arizona, USA).
- Raina, A. (2023). *Flyrock in Surface Mining: Origin, Prediction, and Control*. Boca Raton: CRC Press. doi: 10.1201/9781003327653
- Rezaei, M., Monjezi, M., & Varjani, A. Y. (2011). Development of a fuzzy model to predict flyrock in surface mining. *Safety science*, 2, 298-305. doi:10.1016/j.ssci.2010.09.004
- Rezakhah, M., & Moreno, E. (2019). Open pit mine scheduling model considering blending and stockpiling. In E. Topal (Ed.), *Proceedings of the 28th International Symposium on Mine Planning and Equipment Selection - MPES 2019* (pp. 75-82). Perth: Springer Cham. doi:10.1007/978-3-030-33954-8
- Ripley, B. D. (1993). Statistical aspects of neural networks. *Networks and Chaos-Statistical and Probabilistic Aspects*, 40-123.
- Sayadi, A., Monjezi, M., Talebi, N., & Khandelwal, M. (2013). A comparative study on the application of various artificial neural networks to simultaneous prediction of rock fragmentation and backbreak. *Journal of Rock Mechanics and Geotechnical Engineering*, 5(4), 318-324. doi:10.1016/j.jrmge.2013.05.007
- Tajik, S., Monjezi, M., Rezakhah, M., & Amiri Hosseini, M. (2023). Development of a Mathematical Model for Predicting Blast-Induced Fragmentation Considering Elastic Wave Velocities. *JOURNAL OF ROCK MECHANICS*, 7(2), 71-82. doi: 10.22034/IRSRM.2023.21255.2222
- Wang, C. (1994). *A theory of generalization in learning machines with neural network applications*. Pennsylvania: University of Pennsylvania.
- Wang, X., Hosseini, S., Jahed Armaghani, D., & Tonnizam Mohamad, E. (2023). Data-Driven Optimized Artificial Neural Network Technique for Prediction of Flyrock Induced by Boulder Blasting. *Mathematics*, 11(10), 2358. doi:10.3390/math11102358
- Yari, M., Armaghani, D., Maraveas, C., Ejlali, A., Mohamad, E., & Asteris, P. (2023). Several Tree-Based Solutions for Predicting Flyrock Distance Due to Mine Blasting. *Applied Sciences*, 13(3), 1345. doi:10.3390/app13031345
- Zorlu, K., Gokceoglu, C., Ocakoglu, F., Nefeslioglu, H., & Acikalin, S. (2008). Prediction of uniaxial compressive strength of sandstones using petrography-based models. *Engineering Geology*, 96(3-4), 141-158. doi:10.1016/j.enggeo.2007.10.009

SAŽETAK

Integriranje procjene umjetne neuronske mreže s optimizacijom algoritmom pčela za smanjenje izlijetanja komada stijena pri miniranju u površinskome kopu

Leteći komadi stijena (*flyrock*) neželjena su i opasna pojava koja nastaje tijekom miniranja u površinskim kopovima, a mogu imati ozbiljne posljedice na okoliš i sigurnost ljudi. Zbog tih rizika nužno je provesti detaljno istraživanje ovoga fenomena kako bi se smanjili njegovi negativni učinci. U ovome se radu predstavlja novi hibridni inteligentni model koji omogućuje predviđanje i smanjenje udaljenosti izlijetanja stijena kombiniranjem umjetne neuronske mreže (ANN) s optimizacijom algoritmom pčela. Analiza je provedena na temelju skupa od 334 zapisa miniranja prikupljenih iz površinskoga kopa rudnika bakra Sungun. Razvijeni su različiti modeli neuronskih mreža koji su potom vrednovani. Nakon procjene modela pomoću formalnoga sustava bodovanja odabran je najuspješniji model za optimizaciju. Taj odabrani ANN model pokazao je izvrsna prediktivna svojstva s koeficijentima determinacije (R^2) od 0,8930 za fazu treniranja i 0,8874 za fazu testiranja te s vrijednostima srednje kvadratne pogreške (RMSE) od 0,2486 i 0,2512. Time je postigao bolje rezultate u odnosu na klasične empirijske modele. Za dodatnu optimizaciju obrasca miniranja i povećanje sigurnosti korišten je algoritam pčela s ciljem minimizacije predviđene udaljenosti letećih komada stijena. Kao rezultat optimizacije utvrđena je optimalna udaljenost izlijetanja stijena od 7,25 metara, što predstavlja smanjenje od 27,5 % u odnosu na najmanju zabilježenu vrijednost u skupu podataka. Ti rezultati potvrđuju učinkovitost predloženoga hibridnog pristupa u poboljšanju sigurnosti i učinkovitosti miniranja u površinskim kopovima.

Ključne riječi:

procjena izlijetanja komada stijena, optimizacijski algoritam, model miniranja, algoritam pčela, metaheuristički algoritmi

Author's contribution

Mojtaba Rezakhah: conceptualization, data curation, formal analysis, investigation, resources, software, supervision, and writing – original draft. **Erfan Nemati:** formal analysis, investigation, methodology, software, validation, and writing – original draft. **Amir Batarbiat:** formal analysis, investigation, methodology, resources, software, validation, visualization, and writing – original draft. **Manoj Khandelwal:** data curation, methodology, resources, supervision, validation, visualization, and writing – review & editing

All authors have read and agreed to the published version of the manuscript.