

Examining the Impact of Coal Gas Emissions on the Stability Analysis of Coal Pillars: A Critical Literature Review

Rudarsko-geološko-naftni zbornik
(The Mining-Geology-Petroleum Engineering Bulletin)
UDC: 622.2
DOI: 10.17794/rgn.2024.3-7

Review scientific paper



Emad Ansari Ardehjani¹, Mohammad Ataei², Farhang Sereshki³, Ali Mirzaghobanali⁴, Naj Aziz⁵

¹ Ph.D. Candidate, Faculty of Mining, Petroleum and Geophysics Shahrood University of Technology, Shahrood, Iran.

² Professor, Faculty of Mining, Petroleum and Geophysics Shahrood University of Technology, Shahrood, Iran.

³ Professor, Faculty of Mining, Petroleum and Geophysics Shahrood University of Technology, Shahrood, Iran.

⁴ Senior Lecturer, School of Engineering, University of Southern Queensland, Queensland, Australia.

⁵ Professor, School of Civil, Mining & Environmental Engineering, Building 4 Rom G32 Faculty of Engineering and Information Sciences University of Wollongong, NSW 2522 Australia, Australia.

Abstract

An essential component of guaranteeing the security of underground coal mines is the stability of underground areas. Coal pillars are left in place in underground coal mines to stabilize opened regions where excavations have redistributed in situ stresses. The designs of pillars have been developed in accordance with the necessary safety and economic constraints. The safe and cost-effective design of mining pillars, particularly coal pillars, is influenced by various factors. The purpose of this publication, which is a portion of a doctoral thesis, is to support a theory regarding the impact of methane emissions on the stability of coal pillars. This topic has not received much attention in the literature. The pillar design's initially effective parameters are examined and categorized in this study. The impact of coal gas emissions on the stability of coal roofs, pillars, and walls are investigated for the first time. Previous research on the mechanical behavior of coal exposed to different kinds of gases is examined for this aim. The literature's findings also showed that coal's mechanical properties will decrease when exposed to gases, including shear strength, elastic modulus, and uniaxial compressive strength. The coal texture develops joints and cracks as a result of gas adsorption and emission, which lowers the mechanical properties of the coal and causes instabilities in underground spaces. The literature suggests that gas emissions from coal pillars and walls in underground mines most likely produced unpredictable instability and outburst. To the best of the authors' knowledge and ability to determine, there is an absence of critical literature reviews on the mechanical properties of coal during gas emissions, which is the topic of this work.

Keywords: coal

mechanical properties; methane emissions; coal pillar stability; gas adsorption and desorption; rock mechanics

1. Introduction

Coal is one of the energy sources for industrial and household applications. Also, coal supplies the required materials for the steel industry. Coal layers are mined based on the depth, thickness, and slope of the coal seam in both surfaces and underground methods. In surface coal mining methods, the main challenges are related to supply chain, continuity of the coal production, and environmental issues, including the production of greenhouse gases and pollution of soil and water. However, in underground mining there are additional challenges on top of the previously mentioned, including designing a safe and economical method for coal extraction. The main factors affecting the safe and economical operations of underground mining methods depend on the stable and optimal design of underground spaces. This

means the optimal and economical design of underground spaces shall meet the production continuity (Ataei, 2015).

Longwall, room and pillar, short wall, and top coal caving mining are examples of underground coal extraction. In the USA, Australia, and India, longwall and room and pillar mining are the most popular techniques among them. Figures 1a and b show examples of longwall mining and room and pillar mining, respectively. In these methods to stabilize constructed spaces, coal pillars are designed and remained. Part of the deposit that cannot be recovered will remain in the mine if the pillars are not designed optimally and adequately. Stability and safety factors should also be taken into account while designing pillars. Ensuring the stability of underground spaces by taking economic considerations into account is the ultimate goal of optimal underground mining.

In coal pillar design, the stability of pillars depends on several factors. These parameters can be divided into two categories: controllable and uncontrollable. Con-

Corresponding author: Emad Ansari Ardehjani
e-mail address: eaa.emad14@gmail.com

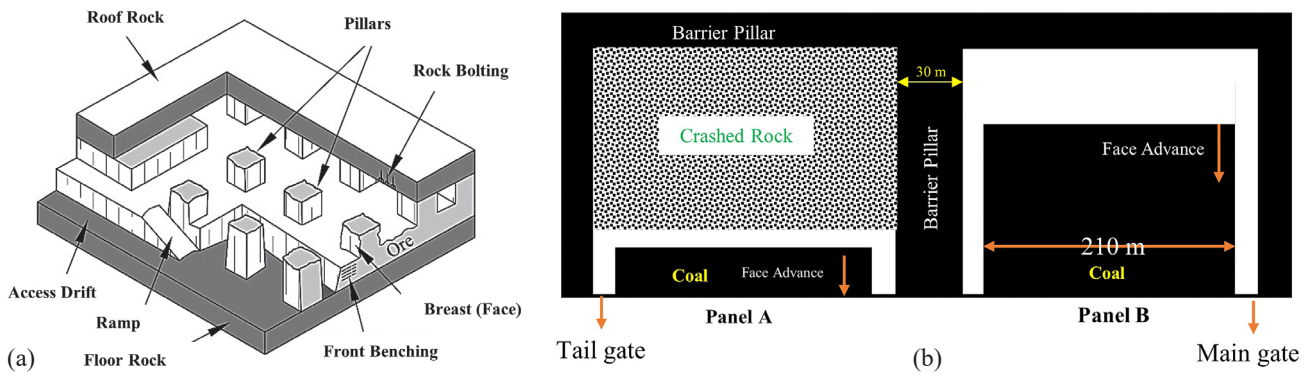


Figure 1: a) A view of room and pillar mining (Zhang and Ni, 2018). b) A view of longwall mining (Ardehjani et al. 2020).

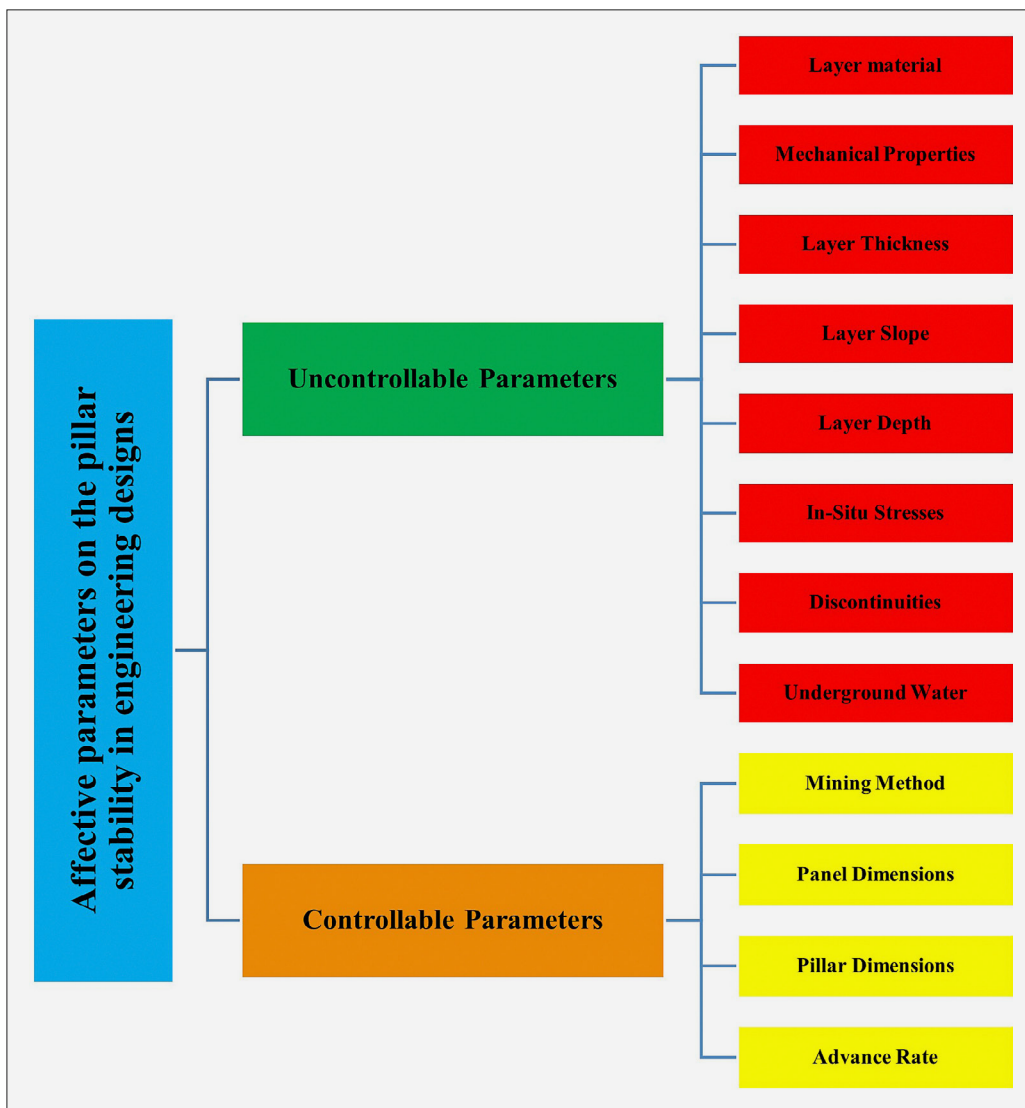


Figure 2: Parameters affective pillar stability in engineering designs

trollable parameters include parameters related to engineering designs, opening dimensions, advance rate, type of underground mining method, and other items. Uncontrollable parameters generally include geological factors such as layer depth, layer thickness, rocks type, thickness and number of key Strata, and layer slope (Ataei,

2015). Important parameters on pillar design are classified in Figure 2. The purpose of this study is to introduce the parameters that have rarely been considered in coal pillars design, at the same time they can play an essential and influential role in engineering designs. This research critically investigates the affecting factors on

the stability of pillars, especially coal pillars, and examines shortcomings and challenges in this field.

2. Most affecting parameters in mine pillar design

Numerous researchers have studied the stability of mine pillars and the affecting parameters in underground mining. Following, the affecting parameters on the stability of mine pillars, especially coal pillars are analyzed.

2.1. Pillar bearing capacity

One of the main factors in the pillar design is the pillar's strength and bearing capacity. The pillar's strength is defined as the maximum amount of applied load per unit area of the pillar before reaching failure. Pillar bearing capacity determines the economy and safety of underground mining operations. Therefore, calculating and estimating pillar strength is a primary step in mine pillars design. Numerous factors affect a pillar's strength that can be divided into controlled parameters, including the pillar's final dimensions, pillar relative dimensions and pillar geometric shape, width to height ratio, time (duration of applying load on the pillar), and uncontrollable parameters, including jointing, in-situ stresses, the ratio of horizontal to vertical stresses, connection conditions between roof and floor, surrounding rocks type, creep, strata stiffness, thickness and number of key strata, seam slope, and other items (Chugh et al., 1990; Kostecki and Spearing, 2015; Wang et al., 2015; Yang et al., 2015; Ataei, 2015).

2.2. Pillar dimensions

Experiments have shown that a specimen's strength will decrease with increased dimensions. The strength differences between small laboratory and large in-situ specimens are justified by the differences in dimensions and sizes. According to coal laboratory and field research, the strength of a coal pillar diminishes exponentially with increasing dimension; so, the strength of a coal pillar has a finite value. As a result, Bieniawski introduced the idea of critical size for the first time in 1968 in order to design mine pillars in rock masses. The specimen strength won't change if the specimen's dimensions are increased above the critical size. The strength of massive pillars can be easily determined by applying the idea of critical size. To define a criteria between the size and strength of laboratory specimens and in-situ specimens, numerous researchers have put forth various essential measurements and connections (Holland and Gaddy, 1957; Holland, 1964; Ataei, 2015; Saki, 2016; Zhang and Ni, 2018).

2.3. Joints and Faults

Pillar's failure type depends on the joint pattern and their frequency and arrangement. Cross-joint systems

can reduce the pillar's strength, while the pillar's stability can't be ensured without external support systems such as rock-bolt or wire-mesh. One of the main factors that reduce the pillar's strength by increasing pillar dimensions is increasing the presence of joints and discontinuities in the pillar's structure. By affecting shear stress on discontinuities plates, jointed rock mass strength will reduce, and as a result, shear failure occurs within the pillar. Following the stress concentration increases in vertices of cracks and joints in the pillar, all cracks expand and will reduce the pillar's tensile strength. Consequently, causing tensile failure in the pillar. According to York et al. In 2000, which led to the presentation of relationships to express the discontinuities effect on coal pillars strength, three parameters of joint density, joint direction, and joint surface strength have the most significant impact on the variation of coal pillar strength (Holland, 1973; Ataei, 2015).

Another discontinuity that will weaken the pillar is a fault; in order overcome stability concerns, more minerals must be left as pillars in that location, which will slow down the rate of mineral extraction and recovery. The probability of instability in the pillar will rise in situations where the fault plane angle is smaller and the axis of the main pillar is not parallel to the fault line. In these situations, pillar strength can be increased by increasing the pillar's width and width to height ratio; as a result, the pillar's shape will change (Bieniawski, 1968; Ataei, 2015).

2.4. Geometry of a mineral deposit

The position of the pillar in relation to the dimension of the mineral is crucial to pillar design. It is best to place pillars alongside the mineral to prevent the development of sharp edges. The applied loads value on the pillar and its strength are affected by the pillar's position with respect to slope and deposit length. For practical reasons, it is advised that the surfaces of pillars be parallel to the workspace's floor and roof (Holland, 1973; Winton, 1999; York et al., 2000; Ataei, 2015).

2.5. Rock type

Materials and rock types also affect the pillar's strength. Pillars can carry more loads when the surrounding rocks are stronger and vice versa. This means the probability of instability will increase when surrounding rock types are weaker, forcing pillar to bear more loads (da Silva et al., 2013; Kaiser et al., 2011; Martin and Maybee, 2000; Winton, 1999).

2.6. Key strata

Key strata are rock layers that controls the movement of the majority or all of the upper layers. Key strata bear upper layers' weight and play an essential role in the stability of underground structures. Jointed rock mass has

Table 1: Literature on effective parameters in pillar design over the past decade

Researcher	Year	Examined parameters	Study Method	Ref.
Kumar et al.	2019	Geology	Numerical	(Kumar et al., 2019)
Yao et al	2019	Geology	Experimental	(Yao et al., 2019)
Jeremic	2020	Geology	Experimental and Analytical	(Jeremic, 2020)
Sharma et al.	2021	Geology	Optimization	(Agrawal, et al., 2021)
Walton and Sinha	2021	Geology	Experimental and Analytical	(Walton and Sinha, 2021)
Yu et al.	2022	Geology	Experimental	(Yu et al., 2022)
Prasetyo et al.	2019	Engineering and Time	Experimental and laboratory	(Prasetyo et al., 2019)
Poulsen	2010	Engineering and Geology	Analytical	(Poulsen, 2010)
Kaiser et al.	2011	Engineering and Geology	Experimental and Numerical	(Kaiser et al., 2011)
Wattimena et al.	2013	Engineering and Geology	Experimental	(Wattimena et al., 2013)
Zhou et al.	2015	Engineering and Geology	Fuzzy	(Zhou et al., 2015)
Li et al.	2015	Engineering and Geology	Numerical	(Li et al., 2015)
Meng et al.	2016	Engineering and Geology	Experimental and Numerical	(Meng et al., 2016)
Reed et al.	2017	Engineering and Geology	Experimental	(Reed et al., 2017)
Mark and Agioutantis	2019	Engineering and Geology	Experimental	(Mark and Agioutantis, 2019)
Singh et al.	2011	Engineering	Experimental	(Singh et al., 2011)
Ghasemi and Shahriar	2012	Engineering	Analytical	(Ghasemi and Shahriar, 2012)
Verma et al.	2014	Engineering	Review, Analytical and Numerical	(Verma et al., 2014)
Shaojie et al.	2016	Engineering	Experimental and Analytical	(Shaojie et al., 2016)
Wang et al.	2020	Engineering	Experimental and Analytical	(Wang et al., 2020)
Deng et al.	2021	Engineering	Analytical and Numerical	(Deng, 2021)
Kumar et al.	2021	Engineering	Optimization	(Kumar et al., 2021)
Wang et al.	2020	Engineering	Analytical	(Wang et al., 2020)
Zhang et al.	2018	Engineering and mining	Numerical	(Zhang et al., 2018)
Zhang et al.	2017	Mining	Numerical	(Zhang et al., 2017)
Wang et al.	2017	Mining	Numerical	(Wang et al., 2017)
Wang et al.	2011	Mining	Numerical	(Wang et al., 2011)
Xia et al.	2021	Mining	Numerical	(Xia et al., 2021)
Duan et al.	2021	Mining	Experimental	(Duan et al., 2021)
Ardehjani et al.	2024	Mining	numerical	(Ansari et al., 2024)
Peng	2015	Engineering, Geology and mining	Review paper	(Peng, 2015)
Zulfahmi et al.	2023	Engineering, Geology and mining	Numerical	(Zulfahmi et al., 2023)

almost a negligible value of tensile strength. This indicates that rock mass failure begins with tensile failure (Qian et al., 2003). One or more key strata may affect the roof layers' displacement in an underground mine, the extent of this effect depends on the key strata thickness, rock's material and strength, number of key strata, and their distance from the immediate roof above the Gob. When the thickness of the key strata is less, the amount of roof displacement depends on the key strata strength and other surrounding layers. If layers mechanical properties are weak, more load is applied to pillars and subsequently instability risk in pillars will increase (Bieniawski, 1986; Ju and Xu, 2013; Li et al., 2018; Kuang et al., 2019).

2.7. Confining pressure

Based on all failure criteria, specimen strength will increase following an increase in confining pressure. Also, applying confining pressure causes changes in some rock mechanical properties, such as the Poisson's ration and Young module. It is possible to define a central (inner) and outer part for every pillar. The outer part must have the necessary conditions to apply appropriate confining pressure on the inner part to prevent possible deformations. The value of this confining pressure applied to the pillars inner part can be calculated using theories presented in the literature (Ardehjani et al., 2020; Ataei, 2015).

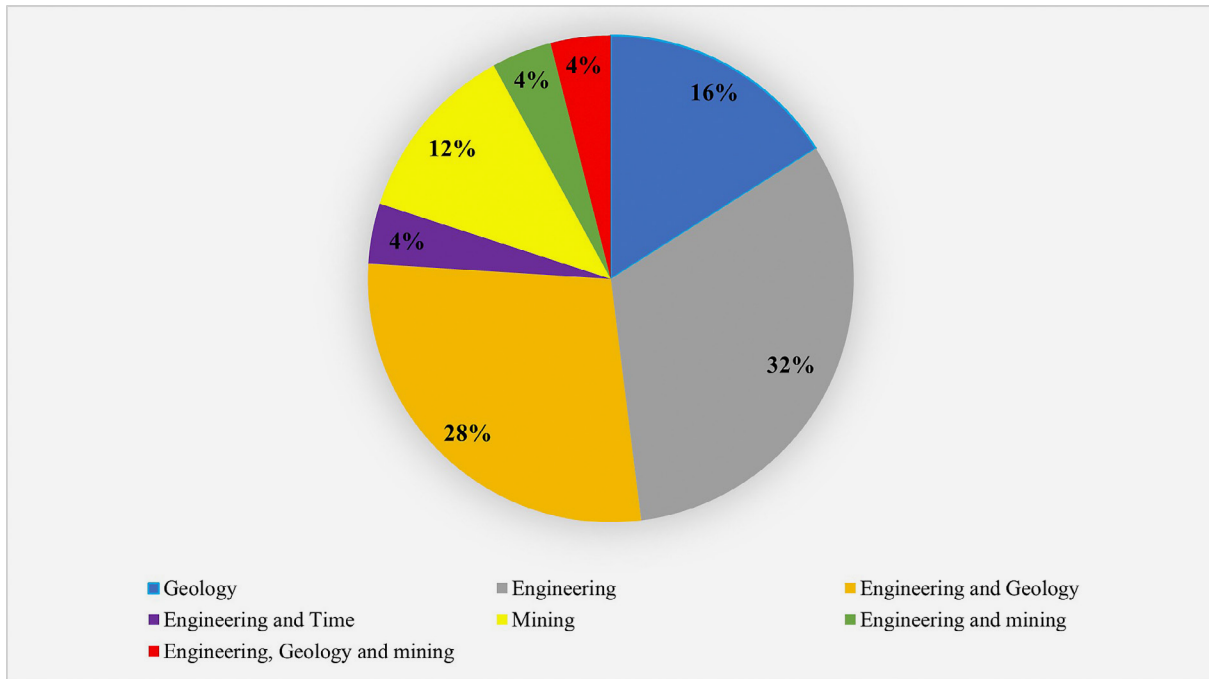


Figure 3: The percentage of examined parameters in pillar design over the past decade

2.8. Inclined layers

In inclined layers, increasing the layer's slope increased applied shear stress on pillars. As a result, the probability of pillar shear failure is increased. It should be noted that, with increasing the layer's slope, the amount of roof vertical displacement will decrease, and pillars will experience more overburden load. Thus, for inclined pillar design one shall consider larger dimensions for pillars to bear overburden loads (Ataei, 2015; Ardehjani et al., 2020; Ardehjani et al., 2021).

By examining the trend of studies on mine pillars stability in recent years, it is clear majority of methods and studies (Mark and Agioutantis, 2019) are concentrated on parameters such as geological conditions and parameters (Kumar et al., 2019), engineering designs (Shaojie et al., 2016; Wang et al., 2020), the impact of mining process on the mine opening, and pillars stability (Zhang et al., 2017; Xia et al., 2021), the impact of time on the pillars deformation and bearing capacity (Prasetyo et al., 2019; Wang and Cai, 2021), pillar's rocks material and type (Choudhary et al., 2021; Walton and Sinha, 2021), and other parameters that are explained before in more detail. A list of research studies on effective parameters for pillar design, and researchers with the most citations in this field over the last decade, are listed in Table 1. In this table, parameters are classified and examined in several main groups: geology, engineering, geology and engineering, and mining. Geology parameters include things such layer's slope, confining pressure, important strata, rock type, joints and faults, and the geometry of a mineral deposit. mining parameters are including, the type of mining methods. Engineering

parameters are including panel dimension, pillar dimension, advanced rate etc. It is evident from the literature that geological and engineering parameters are influential on stable and optimal pillar design. The percentage of studied parameters for pillar design over the past decade is shown in Figure 3.

According to Figure 3, most of the research studies were conducted to investigate the effects of engineering, engineering and geology, and geology parameters, respectively. These parameters have the most significant impact on each other in designing underground spaces; subsequently, to perform a safe, stable, and economical design, these parameters impact on each other shall also be examined. To construct an underground space, Earth provides construction raw materials for engineers; thus, these raw materials cannot be changed. To deal with these conditions, engineering designs must be made in such a way as to meet the geological conditions of the area, including rocks type, joints and cracks, groundwater, and other items. Therefore, most of the research has been carried out to investigate the effect of engineering and engineering and geology parameters on the stability of pillars and underground spaces.

3. Coal pillars design

In underground coal mines, to ensure the stability of excavated spaces during mining operations, pillars are designed from coal or surrounding rocks. Coal pillars design is exactly the same as other mine pillars; also, the parameters mentioned in Figure 2 are considered in their design. In addition to mentioned parameters for coal pillar design, for the first time in 2017, Do et al.

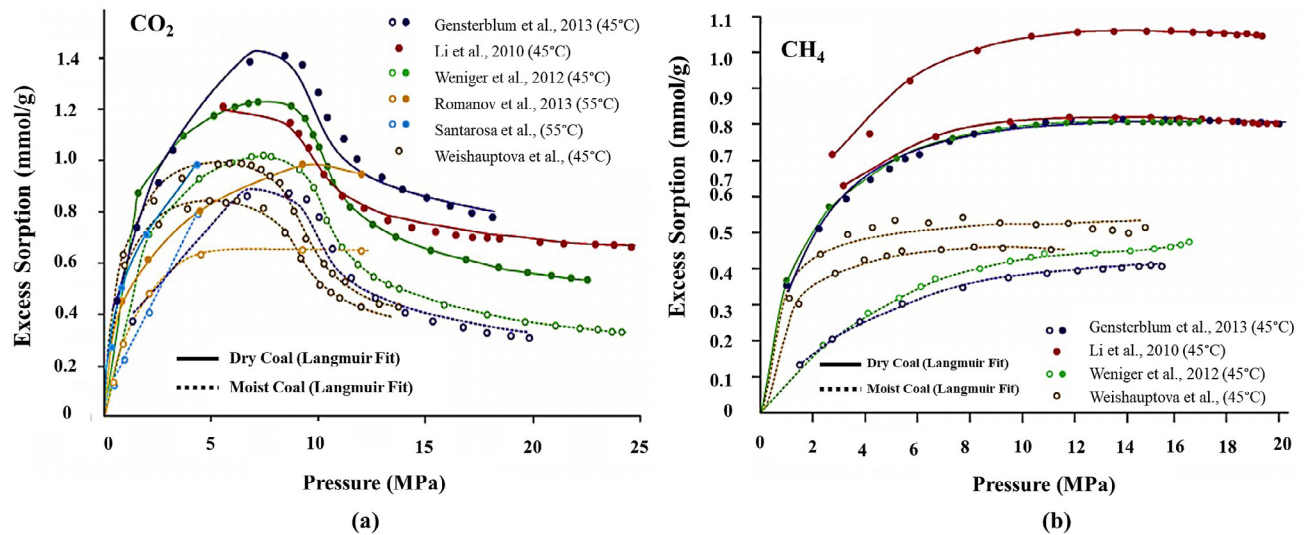


Figure 4: The maximum volume of gas adsorbed by wet and dry coal specimens at different pressures for CO₂ and CH₄, respectively in Figures (a), and (b) (Mukherjee & Misra, 2018)

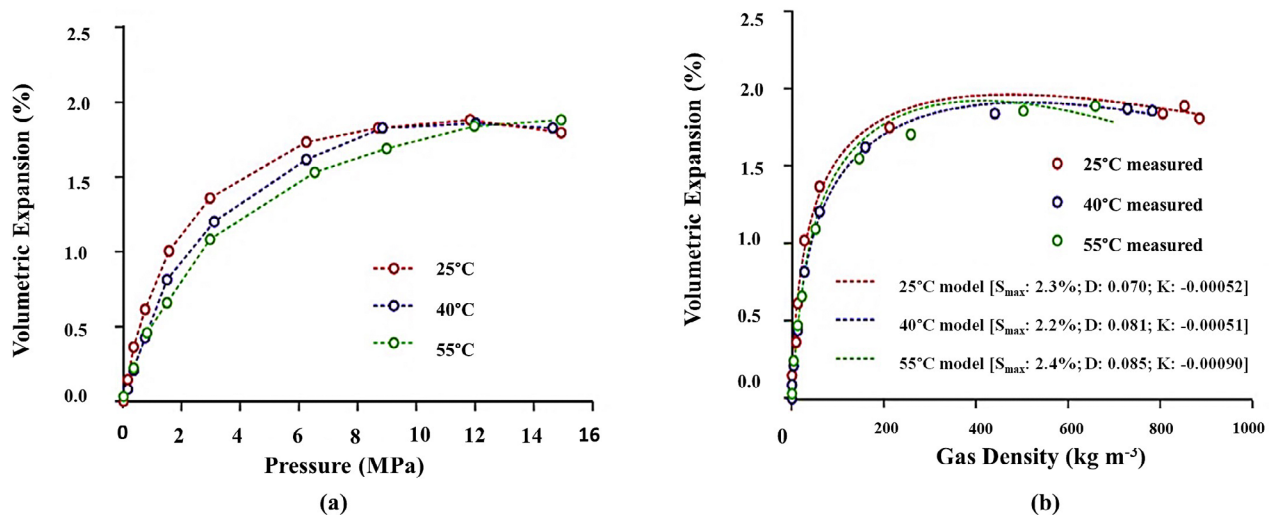


Figure 5: Coal volumetric swelling in exchange for increased CO₂ adsorption as a function of a) pressure and b) density at different temperatures (Day et al., 2008).

studied the effect of CO₂¹ adsorption on coal pillars and walls stability in abandoned coal mines. This study aimed to evaluate the feasibility of CO₂ sequestration in abandoned coal mines. According to this study, following CO₂ adsorption, coal pillars will become unstable, and the possibility of roof collapse and ground subsidence increases. They revealed that CO₂ adsorption reduces mechanical properties, including coal's strength and modulus of elasticity; as a result, the probability of instability in coal pillars increases (Du et al., 2017).

This study raises questions as to whether gas type affects the values of mechanical properties? Will only gas adsorption cause these variations? Do gas emissions also result in changes in coal mechanical properties? Answering these questions requires investigating coal behavior after various gases adsorption and emission;

therefore, literature of research on coal behavior during different gases adsorption and emission is examined.

4. Analysis of gas emission and adsorption impact on coal structure

Based on studies, following gas adsorption and emission coal swells and shrinks, respectively. According to research, this deformation due to gas adsorption and emission exposes coal to changes in mechanical properties; adsorption of higher sorption gases such as CO₂ and CH₄² dramatically reduces coal strength and its modulus of elasticity. Major studies on the effect of gas adsorption and emission on coal mechanical properties were carried out in CO₂ sequestration in coal or enhanced coal bed methane (ECBM) technique by injecting fluids such

¹ Carbon Dioxide

² Methane

as CO₂, N₂, and brine. Therefore, most research and studies in this field have been carried out on ECBM and CO₂ sequestration. This research generally concentrates on the processes and principal parameters affecting CH₄ recovery and CO₂ sequestration discussed below.

Global desire for the CO₂-ECBM technology has revealed that coal swelling following CO₂ adsorption markedly reduces coal permeability. A recent study by Liu et al. in 2017 concluded that in CO₂-ECBM process, the rate of coal swelling following CO₂ adsorption is significantly higher than the amount of shrinkage due to CH₄ emissions (Fokker and Van Der Meer, 2003; Fujioka et al., 2010; Liu et al., 2017). To avoid the reduction of coal permeability following CO₂ adsorption, N₂ gas injection during CO₂ injection has been proposed and implemented. N₂ injection reduces the stress near the injection well; it also helps to improve permeability reduction associated with CO₂ injection. Nevertheless, some researchers believe this method is not practical because the whole process is time-consuming (Fujioka et al., 2010; Pan and Connell, 2012).

To better understand the impact of gas adsorption and desorption on coal mechanical properties, initially one needs to become familiar with adsorption and desorption processes. Adsorption is a physical and chemical process described as the adhesion of particles from one phase to the surface of another phase. The reverse of this process is known as desorption (emission). Adsorption is based on adsorption forces and energies, classified into physical and chemical adsorption (Ruthven, 1984).

As mentioned earlier due to gas adsorption and emission coal swells and shrinkages, respectively. As a result of this swelling and shrinkage, coal volume will change, and coal will experience a volumetric strain (Figure 4). Volumetric strain is defined as volume changes with respect to the initial volume of a specimen (Larsen, 2004; Pan and Connell, 2007). It should be noted that the penetration of CO₂ in the coal matrix at higher pressure causes structural changes and rearrangement; coal's response to gas penetration is to change its structure to a more stable structure and more resistant to further gas penetration (Karacan, 2003; Karacan, 2007; Kelemen and Kwiatek, 2009; Day et al., 2011; Liu et al., 2016).

There are various methods to measure coal volume changes, including dilatometric, optical, and direct strain measurements at high pressures. Typical volumetric strain profiles for pressure and compression stress are illustrated, in Figures 5a and b, respectively. The coal swelling increases with increasing pressure; and then the curve reaches a plateau, which indicates the end of swelling (Day et al., 2008).

Experimental data cleared that the highest swelling in coal structure following gas adsorption is for CO₂, then CH₄ adsorption, respectively. At the same time N₂ absorption causes the least amount of swelling in coal structure, actually it is close to zero (Figure 6) (George

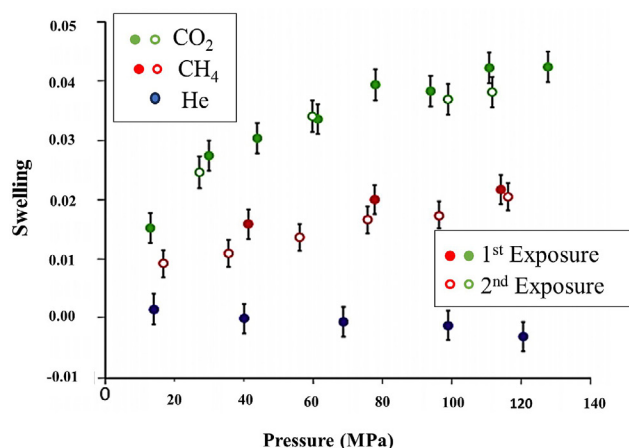


Figure 6: The Coal volumetric swelling under the influence of CO₂, CH₄ and He with increasing gas pressure at 45 °C (George and Barakat, 2001)

and Barakat, 2001). After noble gases adsorption, such as helium in coal structure, swelling won't occur (Day et al., 2008). The CO₂ / CH₄ swelling ratio is significantly high, and this rate has been reported to being higher at low pressures (<1 MPa). This ratio converges at 2:1 at higher pressures (12-15 MPa). Day et al. in 2012 reported that, gas injection with a combination of 20% CO₂ and 80% CH₄ causes additional swelling of about 50% compared to the injection of pure CH₄ in the coal specimen (Day et al., 2012). Swelling depends more on the injection pressure and composition of injected gas than on applied pressure on the specimen.

5. Affecting parameter on coal deformation following gas absorption and emission

The capacity and amount of gas adsorption and emission by coal depend on several parameters. Based on researchers' studies, it is possible to classify these parameters into two groups, intrinsic and non-intrinsic parameters. Intrinsic parameters depend on coal intrinsic properties which are uncontrollable, while non-intrinsic parameters depend on external factors and thus are controllable. These two groups of parameters are classified in Figure 7. These parameters are examined based on previous studies as follows. Because these parameters impact each other, all of them are discussed together, so they have not been examined separately.

The temperature has an opposite effect on coal swelling due to gas absorption (Day et al., 2008). Temperature increase will reduce the volume of adsorbed gas by coal, and as a result, induced strain due to gas adsorption will reduce (Day et al., 2010).

Moisture reduces coal's inducted swelling following CO₂ and CH₄ adsorption, and the intensity of this reduction for CH₄ adsorption is more remarkable than CO₂ (Day et al., 2011). Saying that, in general swelling due

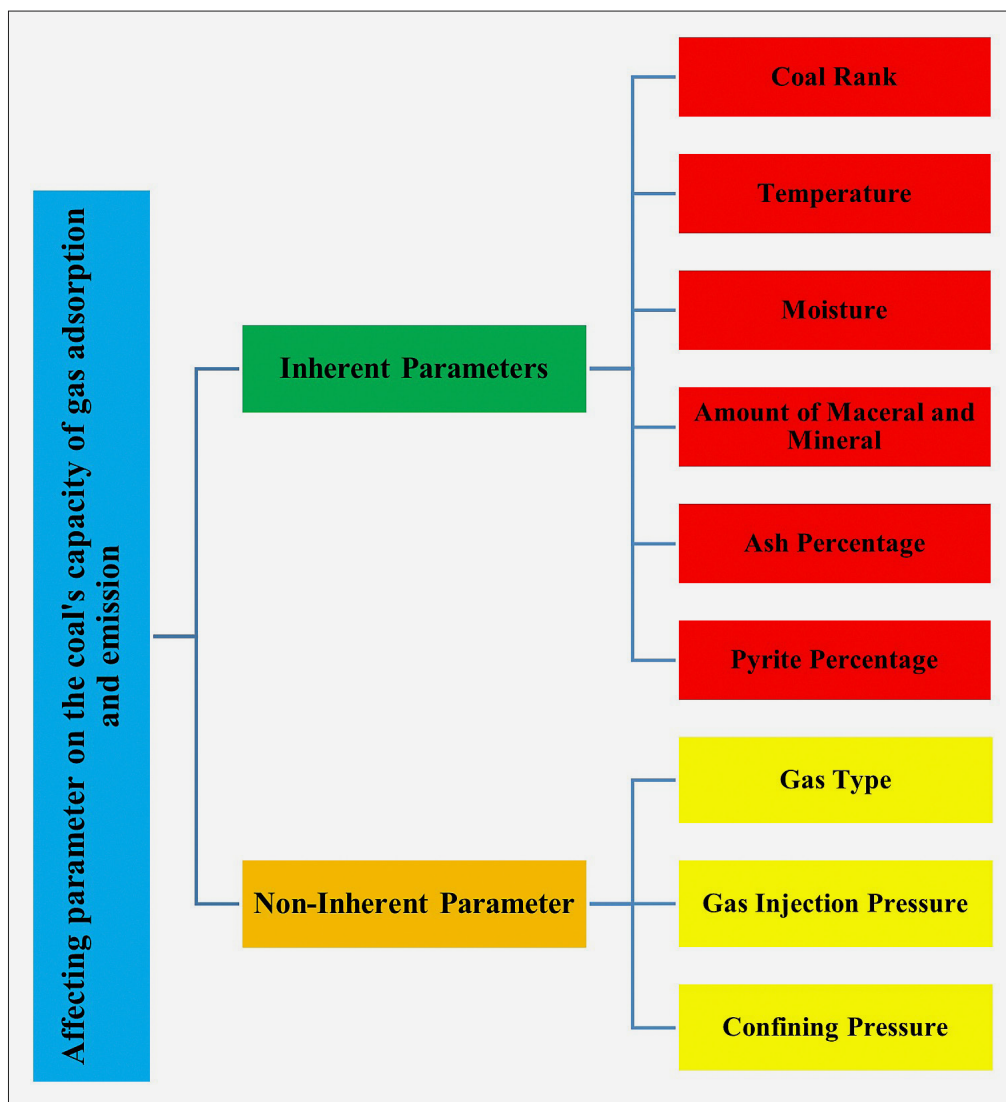


Figure 7: Affecting parameter on coal's capacity of gas adsorption and emission

to CO₂ and CH₄ absorption in wet coals is less. However, the sum of induced swelling and strain following gas adsorption in moisture coal is more noticeable than in dry coal. Laboratory experiments revealed that, with coal rank decreasing, swelling due to gas absorption will increase (Day et al., 2008). Figure (8) shows that the complete replacement of CH₄ by CO₂ creates double strain in sub-bituminous coal compared to bituminous coal (Karacan, 2007; Durucan et al., 2009). This means that, increasing coal rank causes more minor changes in coal structure due to gas adsorption.

Walker et al. Reported in 1988 that under similar laboratory conditions, volumetric swelling due to CO₂ adsorption was lower than the volume of adsorbed CO₂ (Walker et al., 1988). Cui et al. In 2007, experimentally determined volume swelling due to gas adsorption was linearly related to the volume of adsorbed gas (Cui et al., 2007). Day et al. in 2008, reported at low pressures, the volume of gas adsorption is more significant than swelling, but in the range of medium pressures this vol-

ume becomes linear (Day et al., 2008). Reasons for the non-linearity relationship between coal swellings following gas adsorption in different pressure ranges are not yet well understood. Adsorption causes structural saturation and may be attributed to the end of swelling. Coal with a High-absorption capacity necessarily isn't coal with high-swelling ability. The maximum adsorption capacity also isn't proportional to maximum swelling ability (Day et al., 2010). Harpalani and Chen reported in 1995, that although adsorption is nonlinear, swelling is linearly related to gas injection pressure at low pressures (Harpalani and Chen, 1995).

The amount of minerals, ash, and pyrite have the same impact on gas value adsorption. If the amount of these impurities is more, the volume of gas adsorption will decrease; as a result amount of coal mechanical properties changes, and gas emission from the coal will decrease (Laxminarayana and Crosdale, 1999; Laxminarayana and Crosdale, 2002; Weniger et al., 2010; Weniger et al., 2012).

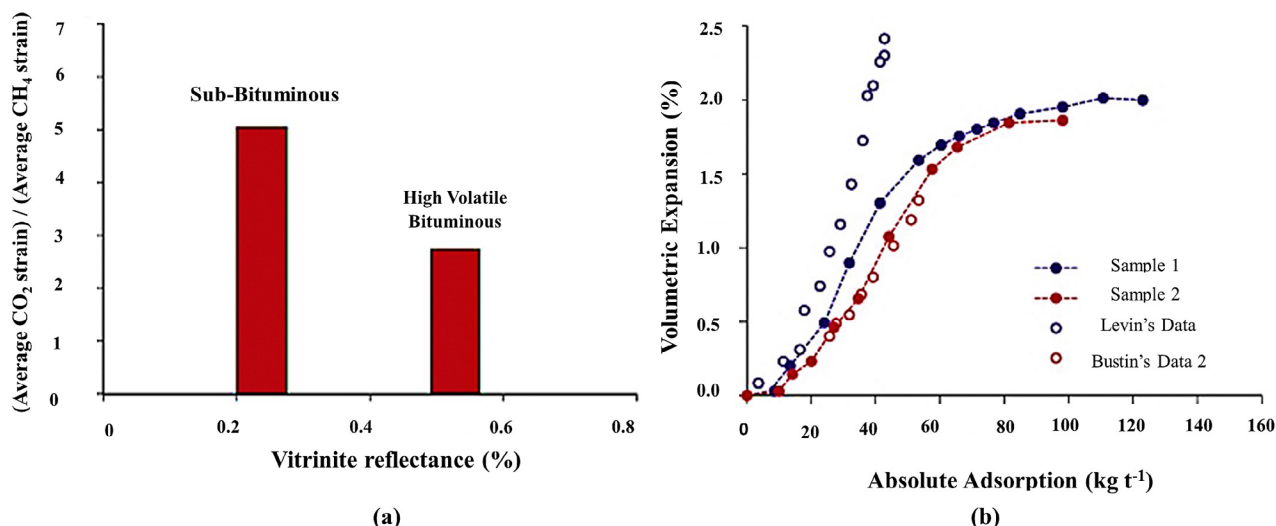


Figure 8: a) Average strain ratio of CO₂ / CH₄ in two coals with different ranks (Robertson and Christiansen, 2005).
b) Indicates the relationship between volumetric swelling and absolute CO₂ adsorption in coal (Day et al., 2008).

Most previous studies have been carried out on CO₂ adsorption and sometimes CH₄ adsorption and its effect on coal structure. These studies have shed light on both CO₂ sequestration and ECBM methods. It should be noted that, studies on the impact of gas emissions especially CH₄ emissions, on coal structure and mechanical properties in minable layers and during mining operations have been rarely carried out, and major studies are on un-minable seams or abandoned mines. Considering that after gas adsorption and emission from coal specimens, its structure changes, and following this deformation, new joints and cracks are generated in its structure; The question arises, how much the gas adsorption and emission will alter coal's mechanical properties. To answer this question, we can refer to the literature and research background.

6. Investigating various gases adsorption and emission impact on coal mechanical properties

Most studies on gas adsorption and emission impact on coal mechanical properties are about the feasibility of CO₂ sequestration and ECBM method. Because these methods are mainly performed in un-minable layers or abandoned mines, most studies are conducted as triaxial test experiments. By simulating deep earth conditions and saturating specimens with different gases, mechanical properties change in depth conditions after gas adsorption can be investigated. In the following, several studies on gas adsorption impact on coal mechanical properties are discussed.

Based on studies, mining engineers believe coal mechanical properties depend on the value of gas in the coal seam. In 1957, Ettinger et al. investigated the impact of CO₂, CH₄, and He adsorption on coal specimens' compressive strength. They realized that, CO₂ and CH₄

adsorption impact on coal specimens' strength are more significant than He adsorption; this is only related to the inherent active surface of CO₂ and CH₄ molecules relative to He. Consequently, CO₂, CH₄, and He adsorption impact on coal mechanical properties is as CO₂ > CH₄ > He. If, after the failure of gas saturated specimen, crushing particle dimensions are smaller, it means gas absorption has more significant impact on the specimen's compressive strength (Ettinger et al., 1957).

As a result of fractures and joints expanding and generation new discontinuities in the coal structure, CO₂ absorption by coal will weaken the coal seam mechanical properties. Also, The mechanical properties of coal seams will decrease as a result of an increase in methane emissions (Aziz and Ming-Li, 1999; Du et al., 2017).

Ates and Barron in, 1988, studied CO₂ saturated adsorption impact on coal specimen strength at a pressure of 3.45 MPa. Also found, coal specimen strength had reduced by about 14% (Ates and Barron, 1988). In 2006, Ranjith and Vieté investigated the effect of CO₂ saturated adsorption on the mechanical properties of brown coal. According to this study, CO₂ saturation will reduce uniaxial compressive strength (UCS) by 13% and deformation modulus (E) by 26% in brown coal (Vieté and Ranjith, 2006).

Ranjith and Perera, in 2012 used experimental tests to measure lignite and bituminous coal specimen strength changes under CO₂ saturation at pressures of 1, 2, 3, and 16 MPa, to investigate the impact of coal cleats density and angle on coal strength reduction rate. Accordingly, coal specimen saturation with CO₂ under 3 MPa pressure will reduce coal strength. In this saturation pressure the reduction of bituminous coal's strength is 4.5 times more than lignite coal. Bituminous and lignite coal strength reductions are 43% and 9.6%, respectively. Coal compressive strength decreasing for CO₂ saturation pressures in the range of 1-3 MPa, has a linearly falling

trend. As the saturation pressure increases with a steeper slope, coal strength decreases. It should be noted, that this diagram slope is higher for bituminous coal than lignite coal. In other words, increasing CO₂ saturation pressure will increase the impact of CO₂ adsorption on coal strength (Ranjith and Perera, 2012). Increasing CO₂ saturation pressure increases coal gas adsorption capacity. Coal CO₂ adsorption capacity is proportional to the coal swelling matrix. Saturation pressure increasing will increase the amount of swelling and redistribute coal structure, which will significantly reduce coal mechanical properties (Bae and Bhatia, 2006; Ranjith and Perera, 2012). As shown in Figure 9a, following CO₂ saturation in the injection pressure range from 1 to 3 MPa, bituminous coal has a 20% greater reduction in UCS strength than lignite. Figure 9b shows the best fitting curve on the uniaxial compressive strength reduction graph, following CO₂ saturation.

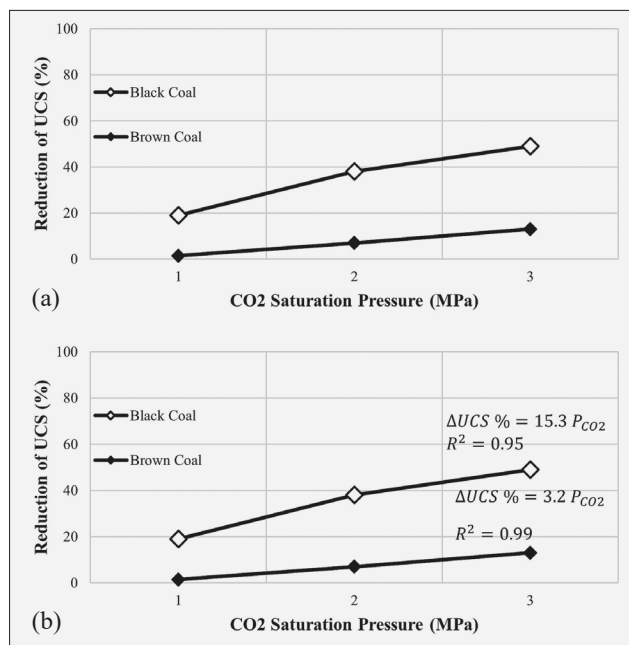


Figure 9: Comparison of uniaxial compressive strength reduction in bituminous and lignite coals (Ranjith and Perera, 2012).

Perra et al. in 2013, saturated bituminous coal with CO₂ at 6 MPa injection pressure; then found that uniaxial compressive strength (UCS) and modulus of deformation (E) reduced by 53% and 36%, respectively. While increasing axial pressure to 8 MPa reduced UCS and E by 79% and 74%, respectively (Perera et al., 2013). Following CO₂ adsorption coal cohesion will decrease, and coal will fail in the direction of its Cleats. In addition to coal internal friction angle partly will reduce (Liu et al., 2015).

The CO₂ flow rate in coal specimens, during applying axial pressure, initially decreases with increasing axial strain, while after specimen failure initially flow intensity increases sharply, then drops to a moderate level. This trend shows that by applying pressure, coal's joints

and cracks are closed; in other words, the amount of permeability will decrease with increasing axial pressure. To determine the rate of coal strength change following CO₂ adsorption, the CO₂-saturated specimen stress-strain diagram is compared with a standard sample under identical loading conditions (Viète and Ranjith, 2006). Thus, when a coal pillar is exposed to CO₂ adsorption, its strength decreases. Due to stresses induced by swelling, coal pillars will swell perpendicular to bedding; as a result, stress required to pillar failure will reduce (Du et al., 2017).

Based on studies, CO₂ adsorption reduces coal's strength under in-situ stress conditions. CO₂ is suspended in voids inside coal texture, dissolved in liquids in these voids, and adsorbed and trapped as surface adsorption inside coal. Coal CO₂ adsorption potential doesn't only depend on the adsorbent and absorbed chemical properties; several factors such as coal moisture content and coal surface rates to coal specimen's size are also involved in the acceleration of adsorption (Viète and Ranjith, 2006). In addition to mentioned factors such as axial and confining pressure, gas injection pressure, coal moisture content, cleats density, direction, and slope are also involved in reducing coal strength. When CO₂ enters in coal structure, it initially enters in cleats system and sits on cleats walls as a result coal strength is reduced (Viète and Ranjith, 2007). When, joint direction tends from 70 degrees to 20 degrees, bituminous coal strength following CO₂ adsorption by about 20%, will be reduced. Coal strength decreases at a slower rate as the slope of cleat's length decreases (Ranjith and Perera, 2012).

Based on the conducted research studies following gases adsorption and emission such as CO₂ and CH₄ in coal structure, coal mechanical properties generally will decrease. Most studies are carried out on two processes of CO₂ sequestration and methane gas recovery using ECBM. These two processes focus more on the impact of CO₂ adsorption or CO₂ substitution instead of CH₄. However, less research has studied methane emission's impact on coal pillars' stability. Gas emissions will reduce coal strength due to creating joints and cracks. Studies on gas adsorption and emission effects on coal mechanical properties are given in Table 2.

The percentage of conducted studies by separating process types about the effect of the gas substitution, adsorption, and emission on coal mechanical properties over the past two decades are shown in Figure 10. The percentage and number of conducted studies by separating gas type about the effect of gas substitution, adsorption, and emission on coal mechanical properties over the past two decades are shown in Figure 11. According to these two figures, and Table 2, most research has been conducted on CO₂ adsorption and its impact on coal mechanical properties. These investigations have been prepared to understand the carbon dioxide sequestration process in the coal seam. Based on Table 2, 22 articles have been published on gas adsorption, while only four

Table 2: Literature on changes in the mechanical properties of coal during gas adsorption and emission

Researcher	Year	Studied Process	Gas Type	Coal Tyap	Studied Mechanical Prop.	Ref.
Aziz and Ming-Li	1999	Adsorption	CO ₂ , CH ₄ , and CO ₂ /CH ₄	South Island, New Zealand	Strength	(Aziz and Ming-Li, 1999)
George and Barakat	2001	Adsorption	CO ₂ , CH ₄ , N ₂ and He	Bituminous	Volumetric Strain	(George and Barakat, 2001)
Farhang Sereshki	2005	Adsorption	CO ₂ and CH ₄	Brown Coal	Length and width strain, Strength and Permeability	(Sereshki, 2005)
Viete and Ranjith	2006	Adsorption	CO ₂	Bituminous	Modulus of Elasticity, Strength and Permeability	(Viete and Ranjith, 2006)
Majewska et al.	2010	Adsorption	CO ₂ and CH ₄	Bituminous	Volumetric Strain	(Majewska et al., 2010)
Ranjith et al.	2010	Adsorption	CO ₂	Lignite	Strength	(Ranjith et al., 2010)
Perera et al.	2011	Review Paper	CO ₂	Bituminous and Lignite	Mechanical Prop.	(Perera et al., 2011)
Ranjith and Perera	2012	Adsorption	CO ₂	Coal	Strength	(Ranjith and Perera, 2012)
Masoudian et al.	2013	Adsorption and Substitute	CO ₂ and CH ₄	Coal	Mechanical structure change and permeability	(Masoudian et al., 2013)
An et al.	2013	Emission	Coal gas	Coal	Strength and Permeability	(An et al., 2013)
Wang et al.	2013	Emission	CO ₂ and CH ₄	Coal	Permeability	(Wang et al., 2013)
Wang et al.	2013	Adsorption	CO ₂ and CH ₄	Coal	Modulus of Elasticity, Strength and Permeability	(Wang et al., 2011)
Masoudian et al.	2014	Adsorption	CO ₂	Coal	Strength and Modulus of Elasticity	(Masoudian et al., 2014)
Perera	2014	Adsorption	CO ₂	Coal	Modulus of Elasticity, Strength and Permeability	(Perera, 2014)
Hol et al.	2014	Adsorption	CO ₂ , CH ₄ , N ₂ and He	Coal	Modulus of Elasticity, Strength and Bulk Modulus	(Hol et al., 2014)
Bagga et al.	2015	Adsorption	CO ₂	Coal	Strength	(Bagga et al., 2015)
Bin Fei et al.	2015	Adsorption	CO ₂	Coal	Mechanical Prop	(Fei et al., 2015)
Masoudian	2016	Review Paper	CO ₂	Bituminous and Lignite	Mechanical Prop.	(Masoudian, 2016)
Perera et al.	2016	Adsorption	CO ₂ and N ₂	Lignite	Strength and Modulus of Elasticity	(Perera et al., 2016)
Ranathunga et al.	2016	Adsorption	CO ₂	Coal, Sandston, mudstone	Strength and Modulus of Elasticity	(Ranathunga et al., 2016)
Wang et al.	2017	Adsorption	CO ₂ and He	Bituminous	Strength and Modulus of Elasticity	(Wang et al., 2017)
Du et al.	2017	Adsorption	CO ₂	Coal	Strength and Modulus of Elasticity	(Du et al., 2017)
Mukherjee and Misra	2018	Review Paper	CO ₂ and CH ₄	Bituminous	Mechanical Prop.	(Mukherjee and Misra, 2018)
Qin et al.	2018	Adsorption and Emission	CH ₄ and N ₂	Coal	Mechanical Prop	(Qin et al., 2018)
Meng and Qiu	2018	Adsorption and Substitute	CO ₂	Coal	Strength	(Meng and Qiu, 2018)
Lu et al.	2019	Adsorption and Emission	CH ₄	Bituminous	Strength	(Lu et al., 2019)
Zhang	2019	Adsorption	CO ₂	Bituminous	Strength	(Zhang et al., 2019)
Sampath et al.	2019	Saturated	Brine and CO ₂	Coal	Mechanical Prop	(Sampath et al., 2019)
Su et al.	2020	Adsorption	CO ₂	Coal	Strength	(Su et al., 2020)
Sampath et al.	2020	Review Paper	CO ₂	South Island, New Zealand	Mechanical Prop.	(Sampath et al., 2020)
Liu et al.	2021	Adsorption	Liquid CO ₂	Coal	Permeability	(Liu et al., 2021)
Zhang et al.	2024	Adsorption	CO ₂ , CH ₄ and N ₂	Bituminous	Mechanical Prop.	(Zhang et al., 2024)

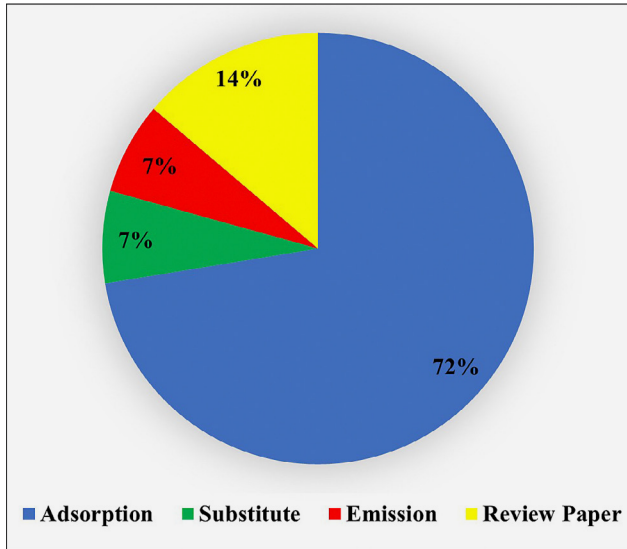


Figure 10: The percentage of conducted studies by separating the process on the impact of gas substitution, adsorption, and emission on coal mechanical properties over the past two decades

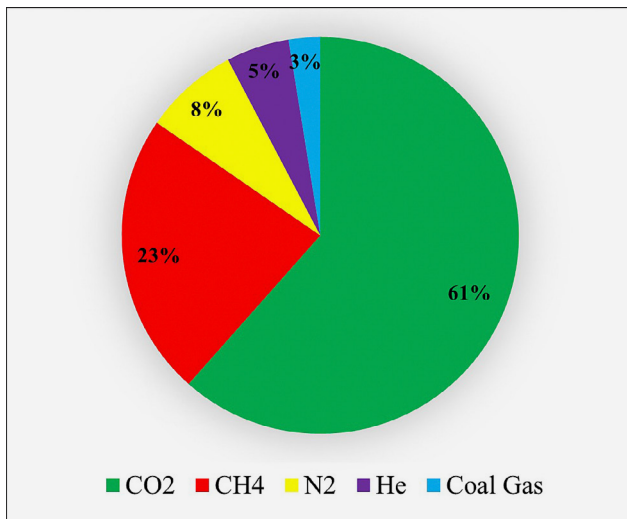


Figure 11: The percentage of conducted studies by separating the gas type on the impact of gas substitution, adsorption, and emission on coal mechanical properties over the past two decades

articles studied gas emission and gas substitute; also, four review papers have been conducted to study all processes. Furthermore, twenty-nine articles critically study CO₂ adsorption and emission impact on coal mechanical properties, and = nine research studies investigated the impact of CH₄ adsorption and emission on coal mechanical properties. Among all of this research, only one article focused on coal gas.

7. Discussion

Numerous scholars have looked at the impact of CO₂ adsorption on coal’s mechanical properties, as shown by

Table 2 and **Figure 10**. Today, it is very typical that there are a lot of published studies in this topic due to the widespread practice of CO₂ sequestering in unmineable or abandoned mines to store this greenhouse gas, handle environmental issues, and lower the danger of global warming. Gas is released from walls and coal pillars in abandoned coal mines after a period of time when CO₂ gets trapped. Previous discussions indicate that this event will contribute to a decrease in the strength of the coal pillar. As a result, examining the impact of the gas emission process is crucial, but owing to the volume of research, this has received less attention.

One strategy for the most efficient use of coal mines is the recovery and use of coal gas as fuel, given the importance of fossil fuels and the high cost of natural gas. There are various coal gas recovery techniques, sometimes known as coal bed methane recovery, or CBM techniques. The ECBM method is one of the most advanced techniques for draining coal gas from a seam. It involves injecting gas or liquid, such as brine or CO₂, to awaken and remove coal gas. Injecting CO₂ into the coal seam is the most popular ECBM technique. It is advised to operate in coal seams that cannot be mined. However, this method can be applied in minable layers where the coal seam has a considerable amount of gas, and gas drainage shall be performed before mining (Kostenko et al., 2022; Lozynskiy et al., 2022; Najafi and Rafiee, 2019; Zapletal et al., 2018).

After CO₂ adsorption and release, the stability of the remaining pillars in abandoned mines will be crucial because pillar failure or instability after CO₂ adsorption will induce unanticipated ground subsidence. Only CO₂ and CH₄ adsorption has been the subject of research on the identification and application of this technique. It is important to note that the primary component of this coal gas recovery technique is the coal seams replacement of CO₂ for CH₄. According to some researchers, there is no need to investigate the effects of gas adsorption and replacement on the mechanical properties of coal because this process should be used in layers that are not suitable for mining. However, it has been observed in many cases that this method is used to drainage coal gas in minable layers, which will increase the outburst possibility in coal mines (Masoudian et al., 2013). Accordingly, the gas substitution process and its impact on coal mechanical properties shall be further investigated.

Changes in the mechanical properties of coal are linked to gas substitution, although this aspect has not gotten as much attention. The impact of CO₂ adsorption on the mechanical properties of coal has been the subject of all research; the impact of gas emissions and substitution on coal has received less attention. Field investigations are crucial because the majority of research has only looked at changes in the strength of coal specimens in laboratories.

The emission of coal gas from non-gas-drainage strata during mining operations weakens the surfaces formed

for the opening of the mine panel, leading to unanticipated instability and a higher likelihood of an outburst. Coal seam strength is decreased by gas release, and as a result, the likelihood of an outburst in a mine will rise. Gas drainage from the coal seam causes additional joints and fissures to form in the coal mass structure in gasified strata. As a result, coal seam strength is reduced. To avoid instability in underground spaces, strength reduction should be taken into account while designing the pillars.

The impact of gas emissions on the mechanical properties of coal specimens has been the subject of relatively little research, and the impact of these emissions on the stability of underground spaces has not been examined at all. This raises the question of whether gas emissions have any impact on the stability of underground spaces.

Coal gas is released from the coal seam by opening a mining panel and installing coal pillars to stabilize removed areas because of the differential between air pressure and overburden pressure. Researchers claim that the emission of coal gas weakens the coal and walls and creates new fractures and fissures in the coal structure. The degree of coal strength reduction resulting from gas adsorption and emission must be studied, along with the factors that influence it. Design calculations should consider the magnitude of the reduction if it is significant.

An essential, useful, and creative first step in resolving the problem of unstable underground mines during mining is to look into how coal gas emissions affect the stability of underground areas during mining. The description of coal behavior during gas adsorption and emission provides the foundation for this. Furthermore, this criterion will be examined for the first time in the design of underground spaces. Because of this, it is advisable to do adequate study on the ways in which gas adsorption, substitution, and emission alter the mechanical properties of coal, with a focus on the effects of coal gas emissions on the stability of underground coal mine pillars.

8. Conclusions

While many elements and factors influence the construction of mine pillars, the most important ones that affect pillar stability are those related to engineering and geology. In addition to the above-mentioned factors, the type of gas, as well as its adsorption and emission, must be taken into account during the original engineering designs of coal pillars. Coal swells and shrinks during CO₂ and CH₄ adsorption and emission, respectively, according to numerous research findings. This distortion of the coal structure will lead to the development of additional cracks and joints. Coal mechanical properties are altered by the formation of new joints and cracks in the structure, which lowers the coal's strength and elastic modulus. The walls and pillars of underground coal mines will become unstable due to a decrease in the mechanical properties of coal. However, it should be noted that the

magnitude of these coal mechanical properties changes depending on gas type, coal type, coal's joints and inherent cracks (cleats) patterns, layer depth, and other cases. Additionally, a more thorough analysis and measurement of the variations in the mechanical properties of coal in each coal location are required.

Because of the pressure differential between the air in the mine's roadways under overburden pressure and the coal texture, coal gas is discharged into mine panels throughout the mining process. Unpredictable weakening of the coal pillars and the formation of new joints and cracks are the main causes of coal gas emissions. Also, this can result in unanticipated collapses and explosions in underground coal mines. Therefore, for safe, appropriate, and cost-effective coal pillar dimensions and underground mine opening design, the calculation of coal mechanical properties after gas adsorption and emission following mining operation would be crucial.

9. References

- An, F., Cheng, Y., Wang, L., and Li, W. (2013): A numerical model for outburst including the effect of adsorbed gas on coal deformation and mechanical properties. *Computers and Geotechnics*, 54, 222–231. <https://doi.org/10.1016/j.compgeo.2013.07.013>
- Ansari, E., Rafiee, R., and Ataei, M. (2024): Investigating Effect of Induced Stresses due to Coal Panel Extraction on Next Panel Strata behavior during Mechanized Longwall Mining: a Case Study. *Journal of Mining and Environment*, 15(1), 381–399. <https://doi.org/10.22044/jme.2023.13787.2560>
- Ardehjani, E. A., Ataei, M., and Rafiee, R. (2020): Estimation of first and periodic roof weighting effect interval in mechanized longwall mining using numerical modeling. *International Journal of Geomechanics*, 20(2), 4019164. [https://doi.org/10.1061/\(ASCE\)GM.1943-5622.0001532](https://doi.org/10.1061/(ASCE)GM.1943-5622.0001532)
- Ardehjani, E. A., Rafiee, R., and Ataei, M. (2021): The effect of the seam slopes on the strata behavior in the longwall coal mines using numerical modeling. <https://doi.org/10.46544/AMS.v26iX.X>
- Ataei, M. 2015. Underground caving method. Shahrood, Iran: Shahrood Univ. of Technology.
- Ates, Y., and Barron, K. (1988): The effect of gas sorption on the strength of coal. *Mining Science and Technology*, 6(3), 291–300. [https://doi.org/10.1016/S0167-9031\(88\)90287-3](https://doi.org/10.1016/S0167-9031(88)90287-3)
- Ayres da Silva, L. A., Ayres da Silva, A. L. M., and Sansone, E. C. (2013): The shape effect and rock mass structural control for mine pillar design. *ISRM EUROCK, ISRM-EUROCK*.
- Aziz, N. I., and Ming-Li, W. (1999): The effect of sorbed gas on the strength of coal—an experimental study. *Geotechnical & Geological Engineering*, 17(3), 387–402. <https://doi.org/10.1023/A:1008995001637>
- Bae, J.-S., and Bhatia, S. K. (2006): High-pressure adsorption of methane and carbon dioxide on coal. *Energy & Fuels*, 20(6), 2599–2607. <https://doi.org/10.1021/ef060318y>

- Bagga, P., Roy, D. G., and Singh, T. N. (2015): Effect of carbon dioxide sequestration on the mechanical properties of Indian coal. ISRM Regional Symposium-EUROCK 2015.
- Bieniawski, Z. T. (1968): The effect of specimen size on compressive strength of coal. *International Journal of Rock Mechanics and Mining Sciences & Geomechanics Abstracts*, 5(4), 325–335. [https://doi.org/10.1016/0148-9062\(68\)90004-1](https://doi.org/10.1016/0148-9062(68)90004-1)
- Bieniawski, Z. T. (1986): Strata control in mineral engineering.
- Chugh, Y. P., Pula, O., and Pytel, W. M. (1990): Ultimate bearing capacity and settlement of coal pillar sub-strata. *International Journal of Mining and Geological Engineering*, 8, 111–130. <https://doi.org/10.1007/BF00920499>
- Cui, X., Bustin, R. M., and Chikatamarla, L. (2007): Adsorption-induced coal swelling and stress: Implications for methane production and acid gas sequestration into coal seams. *Journal of Geophysical Research: Solid Earth*, 112(B10). <https://doi.org/10.1029/2004JB003482>
- Day, S., Fry, R., and Sakurovs, R. (2008): Swelling of Australian coals in supercritical CO₂. *International Journal of Coal Geology*, 74(1), 41–52. <https://doi.org/10.1016/j.coal.2007.09.006>
- Day, S., Fry, R., and Sakurovs, R. (2011): Swelling of moist coal in carbon dioxide and methane. *International Journal of Coal Geology*, 86(2–3), 197–203. <https://doi.org/10.1016/j.coal.2011.01.008>
- Day, S., Fry, R., and Sakurovs, R. (2012): Swelling of coal in carbon dioxide, methane and their mixtures. *International Journal of Coal Geology*, 93, 40–48. <https://doi.org/10.1016/j.coal.2012.01.008>
- Day, S., Fry, R., Sakurovs, R., and Weir, S. (2010): Swelling of coals by supercritical gases and its relationship to sorption. *Energy & Fuels*, 24(4), 2777–2783. <https://doi.org/10.1021/ef901588h>
- Deng, J. (2021): Analytical and numerical investigations on pillar rockbursts induced by triangular blasting waves. *International Journal of Rock Mechanics and Mining Sciences*, 138, 104518. <https://doi.org/10.1016/j.ijrmms.2020.104518>
- Du, Q., Liu, X., Wang, E., and Wang, S. (2017): Strength reduction of coal pillar after CO₂ sequestration in abandoned coal mines. *Minerals*, 7(2), 26. <https://doi.org/10.3390/min7020026>
- Duan, M., Jiang, C., Yin, W., Yang, K., Li, J., and Liu, Q. (2021): Experimental study on mechanical and damage characteristics of coal under true triaxial cyclic disturbance. *Engineering Geology*, 295, 106445. <https://doi.org/10.1016/j.enggeo.2021.106445>
- Durucan, S., Ahsanb, M., and Shia, J.-Q. (2009): Matrix shrinkage and swelling characteristics of European coals. *Energy Procedia*, 1(1), 3055–3062. <https://doi.org/10.1016/j.egypro.2009.02.084>
- Ettinger, I. L., Lamba, E. G., and Adamov, V. G. (1957): Gas medium in coal-breaking destruction processes. *Doklady Akademii Nauk*, 113(2), 383–386.
- Fei, W. Bin, Li, Q., Wei, X. C., Song, R. R., Jing, M., and Li, X. C. (2015): Interaction analysis for CO₂ geological storage and underground coal mining in Ordos Basin, China. *Engineering Geology*, 196, 194–209. <https://doi.org/10.1016/j.enggeo.2015.07.017>
- Fokker, P. A., and Van Der Meer, L. G. H. (2003): The injectivity of coalbed CO₂ injection wells. *Greenhouse Gas Control Technologies-6th International Conference*, 551–556. <https://doi.org/10.1016/B978-008044276-1/50088-X>
- Fujioka, M., Yamaguchi, S., and Nako, M. (2010): CO₂-ECBM field tests in the Ishikari Coal Basin of Japan. *International Journal of Coal Geology*, 82(3–4), 287–298. <https://doi.org/10.1016/j.coal.2010.01.004>
- George, J. D. S., and Barakat, M. A. (2001): The change in effective stress associated with shrinkage from gas desorption in coal. *International Journal of Coal Geology*, 45(2–3), 105–113. [https://doi.org/10.1016/S0166-5162\(00\)00026-4](https://doi.org/10.1016/S0166-5162(00)00026-4)
- Ghasemi, E., and Shahriar, K. (2012): A new coal pillars design method in order to enhance safety of the retreat mining in room and pillar mines. *Safety Science*, 50(3), 579–585. <https://doi.org/10.1016/j.ssci.2011.11.005>
- Harpalani, S., and Chen, G. (1995): Estimation of changes in fracture porosity of coal with gas emission. *Fuel*, 74(10), 1491–1498. [https://doi.org/10.1016/0016-2361\(95\)00106-F](https://doi.org/10.1016/0016-2361(95)00106-F)
- Harpalani, S., Prusty, B. K., and Dutta, P. (2006): Methane/CO₂ sorption modeling for coalbed methane production and CO₂ sequestration. *Energy & Fuels*, 20(4), 1591–1599. <https://doi.org/10.1021/ef0504341>
- Hol, S., Gensterblum, Y., and Massarotto, P. (2014): Sorption and changes in bulk modulus of coal-experimental evidence and governing mechanisms for CBM and ECBM applications. *International Journal of Coal Geology*, 128, 119–133. <https://doi.org/10.1016/j.coal.2014.04.010>
- Holland, C. T. (1964): The strength of coal in mine pillars. The 6th US Symposium on Rock Mechanics (USRMS).
- Holland, C. T. (1973): Mine pillar design. *SME Mining Engineering Handbook*, 1, 13–18.
- Holland, C. T., and Gaddy, F. L. (1957): Some aspects of permanent support of overburden on coal beds. *Proceedings of the West Virginia Coal Mining Institute*, 43–65.
- Jeremic, M. L. (2020): *Ground mechanics in hard rock mining*. CRC Press.
- Ju, J., and Xu, J. (2013): Structural characteristics of key strata and strata behaviour of a fully mechanized longwall face with 7.0 m height chocks. *International Journal of Rock Mechanics and Mining Sciences*, 58, 46–54. <https://doi.org/10.1016/j.ijrmms.2012.09.006>
- Kaiser, P. K., Kim, B., Bewick, R. P., and Valley, B. (2011): Rock mass strength at depth and implications for pillar design. *Mining Technology*, 120(3), 170–179. <https://doi.org/10.1179/037178411X12942393517336>
- Karacan, C. Ö. (2003): Heterogeneous sorption and swelling in a confined and stressed coal during CO₂ injection. *Energy & Fuels*, 17(6), 1595–1608. <https://doi.org/10.1021/ef0301349>
- Karacan, C. Ö. (2007): Swelling-induced volumetric strains internal to a stressed coal associated with CO₂ sorption. *International Journal of Coal Geology*, 72(3–4), 209–220. <https://doi.org/10.1016/j.coal.2007.01.003>
- Kelemen, S. R., and Kwiatek, L. M. (2009): Physical properties of selected block Argonne Premium bituminous coal

- related to CO₂, CH₄, and N₂ adsorption. *International Journal of Coal Geology*, 77(1–2), 2–9. <https://doi.org/10.1016/j.coal.2008.05.020>
- Kostecki, T., and Spearing, A. J. S. (2015): Influence of backfill on coal pillar strength and floor bearing capacity in weak floor conditions in the Illinois Basin. *International Journal of Rock Mechanics and Mining Sciences*, 76, 55–67. <https://doi.org/10.1016/j.ijrmms.2014.11.011>
- Kostenko, V., Zavalova, O., Pozdieiev, S., Kostenko, T., and Hvozď, V. (2022): Mehanizam razvoja kontinuirane eksplozije ugljene prašine u mreži rudarskih radova. “Rudarsko-Geolosko-Naftni Zbornik”, 37(1), 45–53. <https://doi.org/10.17794/rgn.2022.1.5>
- Kuang, T., Li, Z., Zhu, W., Xie, J., Ju, J., Liu, J., and Xu, J. (2019): The impact of key strata movement on ground pressure behaviour in the Datong coalfield. *International Journal of Rock Mechanics and Mining Sciences*, 119, 193–204. <https://doi.org/10.1016/j.ijrmms.2019.04.010>
- Kumar, A., Waclawik, P., Singh, R., Ram, S., and Korbel, J. (2019): Performance of a coal pillar at deeper cover: Field and simulation studies. *International Journal of Rock Mechanics and Mining Sciences*, 113, 322–332. <https://doi.org/10.1016/j.ijrmms.2018.10.006>
- Kumar, R., Das, A. J., Mandal, P. K., Bhattacharjee, R., and Tewari, S. (2021): Probabilistic stability analysis of failed and stable cases of coal pillars. *International Journal of Rock Mechanics and Mining Sciences*, 144, 104810. <https://doi.org/10.1016/j.ijrmms.2021.104810>
- Larsen, J. W. (2004): The effects of dissolved CO₂ on coal structure and properties. *International Journal of Coal Geology*, 57(1), 63–70. <https://doi.org/10.1016/j.coal.2003.08.001>
- Laxminarayana, C., and Crosdale, P. J. (1999): Role of coal type and rank on methane sorption characteristics of Bowen Basin, Australia coals. *International Journal of Coal Geology*, 40(4), 309–325. [https://doi.org/10.1016/S0166-5162\(99\)00005-1](https://doi.org/10.1016/S0166-5162(99)00005-1)
- Laxminarayana, C., and Crosdale, P. J. (2002): Controls on methane sorption capacity of Indian coals. *Aapg Bulletin*, 86(2), 201–212. <https://doi.org/10.1306/61EEDA8A-173E-11D7-8645000102C1865D>
- Li, W., Bai, J., Peng, S., Wang, X., and Xu, Y. (2015): Numerical modeling for yield pillar design: a case study. *Rock Mechanics and Rock Engineering*, 48(1), 305–318. <https://doi.org/10.1007/s00603-013-0539-8>
- Li, Z., Xu, J., Ju, J., Zhu, W., and Xu, J. (2018): The effects of the rotational speed of voussoir beam structures formed by key strata on the ground pressure of stopes. *International Journal of Rock Mechanics and Mining Sciences*, 108, 67–79. <https://doi.org/10.1016/j.ijrmms.2018.04.041>
- Liu, J., Fokker, P. A., and Spiers, C. J. (2017): Coupling of swelling, internal stress evolution, and diffusion in coal matrix material during exposure to methane. *Journal of Geophysical Research: Solid Earth*, 122(2), 844–865. <https://doi.org/10.1002/2016JB013322>
- Liu, J., Peach, C. J., and Spiers, C. J. (2016): Anisotropic swelling behaviour of coal matrix cubes exposed to water vapour: Effects of relative humidity and sample size. *International Journal of Coal Geology*, 167, 119–135. <https://doi.org/10.1016/j.coal.2016.09.011>
- Liu, S.-Q., Sang, S.-X., Liu, H.-H., and Zhu, Q.-P. (2015): Growth characteristics and genetic types of pores and fractures in a high-rank coal reservoir of the southern Qinshui basin. *Ore Geology Reviews*, 64, 140–151. <https://doi.org/10.1016/j.oregeorev.2014.06.018>
- Liu, X., Nie, B., Guo, K., Zhang, C., Wang, Z., and Wang, L. (2021): Permeability enhancement and porosity change of coal by liquid carbon dioxide phase change fracturing. *Engineering Geology*, 287, 106106. <https://doi.org/10.1016/j.enggeo.2021.106106>
- Lozynskiy, V., Falshtynskiy, V., Saik, P., Dychkovskiy, R., Zhautikov, B., and Cabana, E. (2022): Use of magnetic fields for intensification of coal gasification process. “Rudarsko-Geolosko-Naftni Zbornik”, 37(5), 61–74. <https://doi.org/10.17794/rgn.2022.5.6>
- Lu, S., Zhang, Y., Sa, Z., and Si, S. (2019): Evaluation of the effect of adsorbed gas and free gas on mechanical properties of coal. *Environmental Earth Sciences*, 78(6), 1–15. <https://doi.org/10.1007/s12665-019-8222-3>
- Majewska, Z., Majewski, S., and Ziętek, J. (2010): Swelling of coal induced by cyclic sorption/desorption of gas: Experimental observations indicating changes in coal structure due to sorption of CO₂ and CH₄. *International Journal of Coal Geology*, 83(4), 475–483. <https://doi.org/10.1016/j.coal.2010.07.001>
- Mark, C., and Agioutantis, Z. (2019): Analysis of coal pillar stability (ACPS): a NEW GENERATION of pillar design software. *International Journal of Mining Science and Technology*, 29(1), 87–91. <https://doi.org/10.1016/j.ijmst.2018.11.007>
- Martin, C. D., and Maybee, W. G. (2000): The strength of hard-rock pillars. *International Journal of Rock Mechanics and Mining Sciences*, 37(8), 1239–1246. [https://doi.org/10.1016/S1365-1609\(00\)00032-0](https://doi.org/10.1016/S1365-1609(00)00032-0)
- Masoudian, M. S. (2016): Multiphysics of carbon dioxide sequestration in coalbeds: A review with a focus on geomechanical characteristics of coal. *Journal of Rock Mechanics and Geotechnical Engineering*, 8(1), 93–112. <https://doi.org/10.1016/j.jrmge.2015.08.002>
- Masoudian, M. S., Airey, D. W., and El-Zein, A. (2013): Mechanical and flow behaviours and their interactions in coalbed geosequestration of CO₂. *Geomechanics and Geoengineering*, 8(4), 229–243. <https://doi.org/10.1080/17486025.2013.805252>
- Masoudian, M. S., Airey, D. W., and El-Zein, A. (2014): Experimental investigations on the effect of CO₂ on mechanics of coal. *International Journal of Coal Geology*, 128, 12–23. <https://doi.org/10.1016/j.coal.2014.04.001>
- Meng, M., and Qiu, Z. (2018): Experiment study of mechanical properties and microstructures of bituminous coals influenced by supercritical carbon dioxide. *Fuel*, 219, 223–238. <https://doi.org/10.1016/j.fuel.2018.01.115>
- Meng, Z., Shi, X., and Li, G. (2016): Deformation, failure and permeability of coal-bearing strata during longwall mining. *Engineering Geology*, 208, 69–80. <https://doi.org/10.1016/j.enggeo.2016.04.029>

- Mukherjee, M., and Misra, S. (2018): A review of experimental research on Enhanced Coal Bed Methane (ECBM) recovery via CO₂ sequestration. *Earth-Science Reviews*, 179, 392–410. <https://doi.org/10.1016/j.earscirev.2018.02.018>
- Najafi, M., and Rafiee, R. (2019): Development of a new index for methane drainageability of a coal seam using the fuzzy rock engineering system. “Rudarsko-Geolosko-Naftni Zbornik”, 34(4). <https://doi.org/10.17794/rgn.2019.4.4>.
- Pan, Z., and Connell, L. D. (2007): A theoretical model for gas adsorption-induced coal swelling. *International Journal of Coal Geology*, 69(4), 243–252. <https://doi.org/10.1016/j.coal.2006.04.006>
- Pan, Z., and Connell, L. D. (2012): Modelling permeability for coal reservoirs: a review of analytical models and testing data. *International Journal of Coal Geology*, 92, 1–44. <https://doi.org/10.1016/j.coal.2011.12.009>.
- Peng, S. S. (2015): Topical areas of research needs in ground control—a state of the art review on coal mine ground control. *International Journal of Mining Science and Technology*, 25(1), 1–6. <https://doi.org/10.1016/j.ijmst.2014.12.006>.
- Perera, M. S. A. (2014): Effects of Carbon Dioxide Sequestration on Coal’s Hydro-Mechanical Behaviour. ISRM International Symposium-8th Asian Rock Mechanics Symposium.
- Perera, M. S. A., Ranathunga, A. S., and Ranjith, P. G. (2016): Effect of coal rank on various fluid saturations creating mechanical property alterations using Australian coals. *Energies*, 9(6), 440. <https://doi.org/10.3390/en9060440>
- Perera, M. S. A., Ranjith, P. G., Choi, S. K., Bouazza, A., Kodikara, J., and Airey, D. (2011): A review of coal properties pertinent to carbon dioxide sequestration in coal seams: with special reference to Victorian brown coals. *Environmental Earth Sciences*, 64(1), 223–235. <https://doi.org/10.1007/s12665-010-0841-7>.
- Perera, M. S. A., Ranjith, P. G., and Viete, D. R. (2013): Effects of gaseous and super-critical carbon dioxide saturation on the mechanical properties of bituminous coal from the Southern Sydney Basin. *Applied Energy*, 110, 73–81. <https://doi.org/10.1016/j.apenergy.2013.03.069>
- Poulsen, B. A. (2010): Coal pillar load calculation by pressure arch theory and near field extraction ratio. *International Journal of Rock Mechanics and Mining Sciences*, 47(7), 1158–1165. <https://doi.org/10.1016/j.ijrmms.2010.06.011>.
- Prasetyo, S. H., Irnawan, M. A., Simangunsong, G. M., Wati, R. K., Arif, I., and Rai, M. A. (2019): New coal pillar strength formulae considering the effect of interface friction. *International Journal of Rock Mechanics and Mining Sciences*, 123, 104102. <https://doi.org/10.1016/j.ijrmms.2019.104102>.
- Qian, M. G., Miao, X. X., Xu, J. L., and Mao, X. B. (2003): The key stratum theory for control of strata movement. China University of Mining & Technology Press, Xuzhou.
- Qin, L., Zhai, C., Liu, S., and Xu, J. (2018): Mechanical behavior and fracture spatial propagation of coal injected with liquid nitrogen under triaxial stress applied for coal-bed methane recovery. *Engineering Geology*, 233, 1–10. <https://doi.org/10.1016/j.enggeo.2017.11.019>
- Ranathunga, A. S., Perera, M. S. A., and Ranjith, P. G. (2016): Influence of CO₂ adsorption on the strength and elastic modulus of low rank Australian coal under confining pressure. *International Journal of Coal Geology*, 167, 148–156. <https://doi.org/10.1016/j.coal.2016.08.027>
- Ranjith, P. G., Jasinge, D., Choi, S. K., Mehic, M., and Shannon, B. (2010): The effect of CO₂ saturation on mechanical properties of Australian black coal using acoustic emission. *Fuel*, 89(8), 2110–2117. <https://doi.org/10.1016/j.fuel.2010.03.025>.
- Ranjith, P. G., and Perera, M. S. A. (2012): Effects of cleat performance on strength reduction of coal in CO₂ sequestration. *Energy*, 45(1), 1069–1075. <https://doi.org/10.1016/j.energy.2012.05.041>.
- Reed, G., Mctyer, K., and Frith, R. (2017): An assessment of coal pillar system stability criteria based on a mechanistic evaluation of the interaction between coal pillars and the overburden. *International Journal of Mining Science and Technology*, 27(1), 9–15. <https://doi.org/10.1016/j.ijmst.2016.09.031>
- Robertson, E. P., and Christiansen, R. L. (2005): Measuring and modeling sorption-induced coal strain. 4th Annual DOE/NETL Conference on Carbon Capture and Sequestration, Alexandria, Virginia, 2–5.
- Ruthven, D. M. (1984): Principles of adsorption and adsorption processes. John Wiley & Sons.
- Saki, S. A. (2016): Gob ventilation borehole design and performance optimization for longwall coal mining using computational fluid dynamics. Colorado School of Mines.
- Sampath, K., Perera, M. S. A., Li, D., Ranjith, P. G., and Matthai, S. K. (2019): Evaluation of the mechanical behaviour of brine+ CO₂ saturated brown coal under mono-cyclic uni-axial compression. *Engineering Geology*, 263, 105312. <https://doi.org/10.1016/j.enggeo.2019.105312>.
- Sampath, K., Ranjith, P. G., and Perera, M. S. A. (2020): A comprehensive review of structural alterations in CO₂-interacted coal: Insights into CO₂ sequestration in coal. *Energy & Fuels*, 34(11), 13369–13383. <https://doi.org/10.1021/acs.energyfuels.0c02782>.
- Sereshki, F. (2005): Improving coal mine safety by identifying factors that influence the sudden release of gases in outburst prone zones.
- Shaojie, C., Hailong, W., Huaiyuan, W., Weijia, G., and Xiushan, L. (2016): Strip coal pillar design based on estimated surface subsidence in eastern China. *Rock Mechanics and Rock Engineering*, 49(9), 3829–3838. <https://doi.org/10.1007/s00603-016-0988-y>.
- Sharma, M., Agrawal, H., and Choudhary, B. S. (2021): Multivariate regression and genetic programming for prediction of backbreak in open-pit blasting. *Neural Computing and Applications*. <https://doi.org/10.1007/s00521-021-06553-y>.
- Sharma, M., Choudhary, B. S., Kumar, H., and Agrawal, H. (2021): Optimization of Delay Sequencing in Multi-Row Blast using Single Hole Blast Concepts. *Journal of The Institution of Engineers (India): Series D*. <https://doi.org/10.1007/s40033-021-00270-5>. <https://doi.org/10.1007/s40033-021-00270-5>
- Singh, R., Mandal, P. K., Singh, A. K., Kumar, R., and Sinha, A. (2011): Coal pillar extraction at deep cover: with spe-

- cial reference to Indian coalfields. *International Journal of Coal Geology*, 86(2–3), 276–288. <https://doi.org/10.1016/j.coal.2011.03.003>
- Su, E., Liang, Y., Chang, X., Zou, Q., Xu, M., and Sasmito, A. P. (2020): Effects of cyclic saturation of supercritical CO₂ on the pore structures and mechanical properties of bituminous coal: an experimental study. *Journal of CO₂ Utilization*, 40, 101208. <https://doi.org/10.1016/j.jcou.2020.101208>
- Verma, C. P., Porathur, J. L., Thote, N. R., Roy, P. P., and Karikal, S. (2014): Empirical approaches for design of web pillars in highwall mining: review and analysis. *Geotechnical and Geological Engineering*, 32(2), 587–599. <https://doi.org/10.1007/s10706-013-9713-8>
- Viete, D. R., and Ranjith, P. G. (2006): The effect of CO₂ on the geomechanical and permeability behaviour of brown coal: implications for coal seam CO₂ sequestration. *International Journal of Coal Geology*, 66(3), 204–216. <https://doi.org/10.1016/j.coal.2005.09.002>
- Viete, D. R., and Ranjith, P. G. (2007): The mechanical behaviour of coal with respect to CO₂ sequestration in deep coal seams. *Fuel*, 86(17–18), 2667–2671. <https://doi.org/10.1016/j.fuel.2007.03.020>
- Walker, P. L., Verma, S. K., Utrilla, J. R., and Khan, R. M. (1988): A direct measurement and macerals induced methanol of expansion in coals by carbon dioxide and. *Fuel*, 67, 719–726. [https://doi.org/10.1016/0016-2361\(88\)90305-5](https://doi.org/10.1016/0016-2361(88)90305-5)
- Walton, G., and Sinha, S. (2021): Improved empirical hard rock pillar strength predictions using unconfined compressive strength as a proxy for brittleness. *International Journal of Rock Mechanics and Mining Sciences*, 148, 104934. <https://doi.org/10.1016/j.ijrmms.2021.104934>
- Wang, B., Dang, F., Gu, S., Huang, R., Miao, Y., and Chao, W. (2020): Method for determining the width of protective coal pillar in the pre-driven longwall recovery room considering main roof failure form. *International Journal of Rock Mechanics and Mining Sciences*, 130, 104340. <https://doi.org/10.1016/j.ijrmms.2020.104340>
- Wang, G., Wu, M., Wang, R., Xu, H., and Song, X. (2017): Height of the mining-induced fractured zone above a coal face. *Engineering Geology*, 216, 140–152. <https://doi.org/10.1016/j.enggeo.2016.11.024>
- Wang, H., Poulsen, B. A., Shen, B., Xue, S., and Jiang, Y. (2011): The influence of roadway backfill on the coal pillar strength by numerical investigation. *International Journal of Rock Mechanics and Mining Sciences*, 48(3), 443–450. <https://doi.org/10.1016/j.ijrmms.2010.09.007>
- Wang, K., Du, F., Zhang, X., Wang, L., and Xin, C. (2017): Mechanical properties and permeability evolution in gas-bearing coal–rock combination body under triaxial conditions. *Environmental Earth Sciences*, 76(24), 1–19. <https://doi.org/10.1007/s12665-017-7162-z>
- Wang, M., and Cai, M. (2021): Numerical modeling of time-dependent spalling of rock pillars. *International Journal of Rock Mechanics and Mining Sciences*, 141, 104725. <https://doi.org/10.1016/j.ijrmms.2021.104725>
- Wang, R., Bai, J., Yan, S., Chang, Z., and Wang, X. (2020): An innovative approach to theoretical analysis of partitioned width & stability of strip pillar in strip mining. *International Journal of Rock Mechanics and Mining Sciences*, 129, 104301. <https://doi.org/10.1016/j.ijrmms.2020.104301>
- Wang, S., Elsworth, D., and Liu, J. (2011): Permeability evolution in fractured coal: the roles of fracture geometry and water-content. *International Journal of Coal Geology*, 87(1), 13–25. <https://doi.org/10.1016/j.coal.2011.04.009>
- Wang, S., Elsworth, D., and Liu, J. (2013): Permeability evolution during progressive deformation of intact coal and implications for instability in underground coal seams. *International Journal of Rock Mechanics and Mining Sciences*, 58, 34–45. <https://doi.org/10.1016/j.ijrmms.2012.09.005>
- Wang, X., Bai, J., Wang, R., and Sheng, W. (2015): Bearing characteristics of coal pillars based on modified limit equilibrium theory. *International Journal of Mining Science and Technology*, 25(6), 943–947. <https://doi.org/10.1016/j.ijmst.2015.09.010>
- Wattimena, R. K., Kramadibrata, S., Sidi, I. D., and Azizi, M. A. (2013): Developing coal pillar stability chart using logistic regression. *International Journal of Rock Mechanics and Mining Sciences*, 58, 55–60. <https://doi.org/10.1016/j.ijrmms.2012.09.004>
- Weniger, P., Franců, J., Hemza, P., and Krooss, B. M. (2012): Investigations on the methane and carbon dioxide sorption capacity of coals from the SW Upper Silesian Coal Basin, Czech Republic. *International Journal of Coal Geology*, 93, 23–39. <https://doi.org/10.1016/j.coal.2012.01.009>
- Weniger, P., Kalkreuth, W., Busch, A., and Krooss, B. M. (2010): High-pressure methane and carbon dioxide sorption on coal and shale samples from the Paraná Basin, Brazil. *International Journal of Coal Geology*, 84(3–4), 190–205. <https://doi.org/10.1016/j.coal.2010.08.003>
- Winton, J. G. (1999): Experience of field measurements and computer simulation methods for pillar design. *Proceedings of the 2nd International Workshop on Coal Pillar Mechanics and Design*. US Department of Health and Human Services, Vail, 49–61.
- Xia, Z., Yao, Q., Meng, G., Xu, Q., Tang, C., Zhu, L., Wang, W., and Shen, Q. (2021): Numerical study of stability of mining roadways with 6.0-m section coal pillars under influence of repeated mining. *International Journal of Rock Mechanics and Mining Sciences*, 138, 104641. <https://doi.org/10.1016/j.ijrmms.2021.104641>
- Yang, J. X., Liu, C. Y., Yu, B., and Wu, F. F. (2015): The effect of a multi-gob, pier-type roof structure on coal pillar load-bearing capacity and stress distribution. *Bulletin of Engineering Geology and the Environment*, 74, 1267–1273. <https://doi.org/10.1007/s10064-014-0685-6>
- Yao, Q., Chen, T., Tang, C., Sedighi, M., Wang, S., and Huang, Q. (2019): Influence of moisture on crack propagation in coal and its failure modes. *Engineering Geology*, 258, 105156. <https://doi.org/10.1016/j.enggeo.2019.105156>
- York, G., Canbulat, I., and Jack, B. W. (2000): Coal pillar design procedures.
- Yu, L., Yao, Q., Chong, Z., Li, Y., Xu, Q., Xie, H., and Ye, P. (2022): Mechanical and micro-structural damage mechanisms of coal samples treated with dry–wet cycles. *Engi-*

- neering Geology, 304, 106637. <https://doi.org/10.1016/j.enggeo.2022.106637>
- Zapletal, P., Koudelková, J., Zubiček, V., Král, T., and Mokrošová, A. (2018): New method of gas drainage as a solution of danger phenomena in underground coal mines. "Rudarsko-Geolosko-Naftni Zbornik", 33(1), 7–13. <https://doi.org/10.17794/rgn.2018.1.2>
- Zhang, G., He, F., Jia, H., and Lai, Y. (2017): Analysis of gateroad stability in relation to yield pillar size: a case study. Rock Mechanics and Rock Engineering, 50(5), 1263–1278. <https://doi.org/10.1007/s00603-016-0988-y>
- Zhang, G., Liang, S., Tan, Y., Xie, F., Chen, S., and Jia, H. (2018): Numerical modeling for longwall pillar design: a case study from a typical longwall panel in China. Journal of Geophysics and Engineering, 15(1), 121–134. <https://doi.org/10.1088/1742-2140/aa9ca4>
- Zhang, Q., Zhu, H., and Kang, R. (2024): Macromolecular insight into the adsorption and migration properties of CH₄/CO₂/N₂ in bituminous coal matrix under uniaxial strain loading. Physics of Fluids, 36(3). <https://doi.org/10.1063/5.0189908>
- Zhang, X. G., Ranjith, P. G., Ranathunga, A. S., and Li, D. Y. (2019): Variation of mechanical properties of bituminous coal under CO₂ and H₂O saturation. Journal of Natural Gas Science and Engineering, 61, 158–168. <https://doi.org/10.1016/j.jngse.2018.11.010>
- Zhang, Y., and Ni, P. (2018): Design optimization of room and pillar mines: a case study of the Xianglushan tungsten mine. Quarterly Journal of Engineering Geology and Hydrogeology, 51(3), 352–364. <https://doi.org/10.1144/qjgegh.2017-037>
- Zhou, J., Li, X., and Mitri, H. S. (2015): Comparative performance of six supervised learning methods for the development of models of hard rock pillar stability prediction. Natural Hazards, 79(1), 291–316. <https://doi.org/10.1007/s11069-015-1842-3>
- Zulfahmi, Z., Sarah, D., Novico, F., and Susilo, R. B. (2023): Assessment of Rock Slope Stability in a Humid Tropical Region: Case Study of a Coal Mine in South Kalimantan, Indonesia. "Rudarsko-Geolosko-Naftni Zbornik", 38(2), 109–125. <https://doi.org/10.17794/rgn.2023.2.8>

SAŽETAK

Ispitivanje utjecaja emisija plina iz ugljena na analizu stabilnosti stupova ugljena: kritički pregled literature

Nužna komponenta jamstva sigurnosti podzemnih rudnika ugljena jest stabilnost podzemnih prostorija. Stupovi ugljena ostavljaju se na mjestu u podzemnim rudnicima kako bi stabilizirali otkopane prostore gdje su iskapanja izazvala raspodjelu naprezanja na terenu. Dimenzije stupova konstruiraju se u skladu sa zahtijevanim sigurnosnim i ekonomskim ograničenjima. Različiti čimbenici utječu na sigurnu i isplativu konstrukciju stupova, posebno stupova pri eksploataciji ugljena. Ovoj temi nije posvećena dovoljna pozornost u literaturi. Svrha je ove studije podržati teoriju o utjecaju emisije metana na stabilnost stupova ugljena. Ispitani su i kategorizirani početni efektivni parametri konstruiranja stupa. Prvi put istražuje se utjecaj emisije plina iz ugljena na stabilnost krovine, stupova i bokova. U tu svrhu pregledana su prethodna istraživanja mehaničkoga ponašanja ugljena izloženoga različitim vrstama plinova. Pregled literature pokazuje da će se mehanička svojstva ugljena (posmična čvrstoća, modul elastičnosti i jednoosna tlačna čvrstoća) smanjiti kada je on izložen utjecaju plinova. Tekstura ugljena stvara pukotine i prsline kao rezultat adsorpcije i emisije plina, što smanjuje mehanička svojstva ugljena i uzrokuje nestabilnosti u podzemnim prostorijama. Zaključak pregleda literature sugerira da su emisije plinova iz ugljenih stupova i bokova najvjerojatnije uzrokovale nepredvidive nestabilnosti i gorske udare u nekim podzemnim rudnicima. Prema saznanjima i uvjerenjima autora nedostaju kritički pregledi literature o mehaničkim svojstvima ugljena tijekom emisije plinova pa ova studija daje doprinos u tome smjeru.

Ključne riječi:

mehanička svojstva ugljena, emisije metana, stabilnost stupova ugljena, adsorpcija i desorpcija plina, mehanika stijena

Authors contribution

Emad Ansari Ardehjeni (Ph.D. Candidate): Compiler of all articles, author of the complete manuscript, and implementer of the research concept. **Mohammad Ataei** (Full Professor): Idea generator and commentator on the review section related to the effective parameters in the stability of coal pillar. **Farhang Sereshki** (Full Professor): Idea generator and supervisor on the drafting section related to the behavior of coal during gas absorption and emission. **Ali Mirzaghobanali** (Senior Lecturer): Scientific editor and English language editor. **Naj Aziz** (Full Professor): Scientific editor and English language editor.